



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE	WIRE RANGE mm ² [AWG]	DIMENSIONS mm [in.]				
	METRIC		A ± 0.80 [0.03]	W ± 0.25 [0.01]	C ± 0.38 [0.01]	M ± 0.80 [0.02]	H ± 0.50 [0.02]
PMNF1-3F-3K	M3	0.5-1.0 [22-18]	20.0 [0.79]	5.9 [0.23]	5.2 [0.20]	16.5 [0.65]	3.3 [0.13]



LISTED
587H
E52164

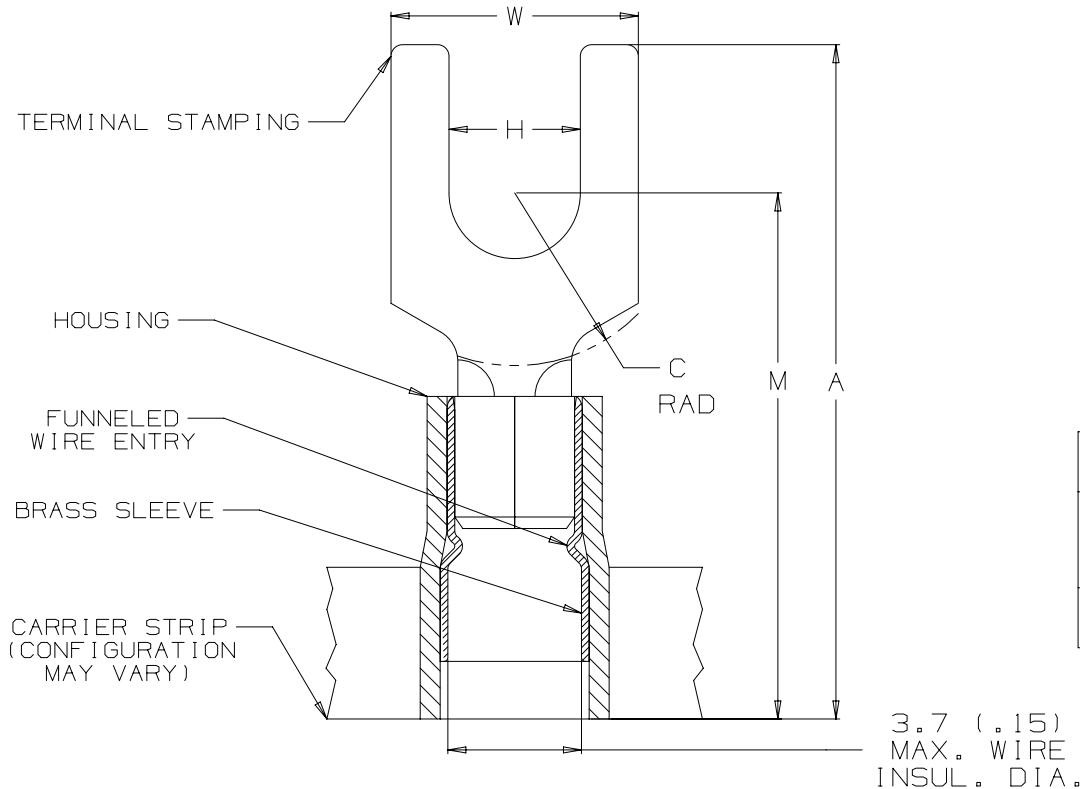

CERTIFIED
LR31212

NOTES:

- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
- DIMENSIONS IN () ARE IN INCHES OR AWG.
- USED FOR:
 - 600V MAX. BUILDING WIRE.
 - 1000V MAX. IN SIGNS FIXTURES, AND LUMINAIRES.
 - 105° [221 °F] MAX. TEMP. RATING OF INSUL MAT'L
 - SOLID OR STRANDED COPPER WIRE.
- PACKAGE QTY:
3K = 3000 PCS. ON CONTINUOUSLY MOLDED CARRIER STRIP.
- MATERIAL:
 - STAMPING: .81 [.03] THK. COPPER, TIN PLATED.
 - SLEEVE: BRASS, TIN PLATED.
 - HOUSING: TYPE 6/6 NTLON, RED.
- WIRE STRIP LENGTH: 6.4 ^{+0.8}/₀ (1/4 ^{+1/32}/₀)
- UL LISTED AND CSA CERTIFIED WITH COPPER 22-18AWG WIRE ONLY.
- STANDARDS INFORMATION.

PRESS/APPLICATOR COMPATIBILITY CHART

PRESS	UC100	UC208	UC200
APPLICATOR	CA9	CA9 CA-800EZ	CA9 CA-800EZ

PART NUMBER

PMNF 1 - 3F - 3K

TITLE

0.5 - 1.0 mm² METRIC CONTINUOUSLY MOLDED, NYLON
INSULATED, FUNNEL ENTRY FORK TERMINAL


CUSTOMER DRAWING

ITEM REVISION NAME

N41604BA/02

DATASET FILE NAME

N41604BA-DC r02A



THIRD ANGLE
PROJECTION

MATERIAL

SEE NOTES

DRAWING NUMBER

N41604BA/02

DRAWN BY

JKD

DATE

03-01-06

CHK

WJB

SCALE

NONE

SHEET 1 OF 1

SIZE

A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	01-26-26	RIAS	DPOI	JSUN	NEW TITLE BLOCK FORMAT & NOTES. PMNF1-4F-3K, PMNF1-5F-3K, PMNF1-6F-3K REMOVED, OBS. PARTS. PART NUMBERS. PRESS CP-851, CP-860 WERE DELETED.	029619/00
01	03-01-06	DAW	DAW	--	ADDED PANDUIT PRESS & APPLICATOR CHART	TR00083