


2

1



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

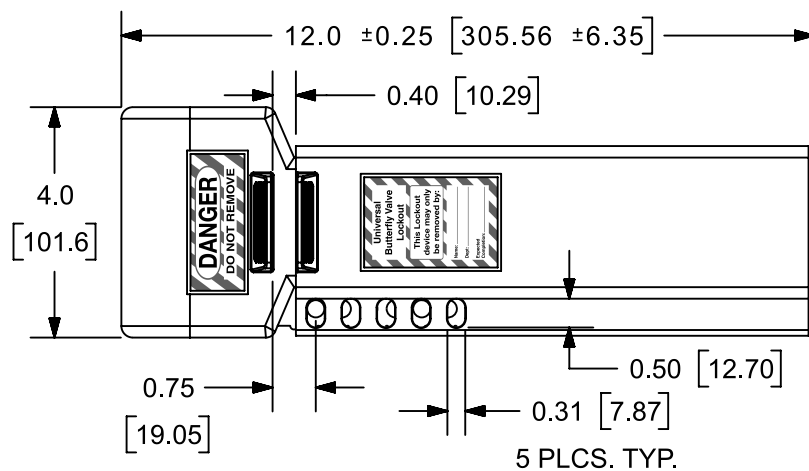


PART NUMBER	VALVE SIZE in. [mm]	STANDARD PKG.	MAX. HANDLE LENGTH	MAX HANDLE WIDTH	OPERATING TEMPERATURE
PSL-BV3	2.0" – 8.0" [50.8 – 203.2]	1	8.0" [203]	4" [101.6]	-40°F(-40°C) TO 215°F(101°C)

NOTES:

1. MILLIMETERS ARE SHOWN IN [].
2. WILL ACCOMMODATE VALVE HANDLES WIDTHS UP TO 1.75".
3. NO LIMIT ON HANDLE LENGTH.

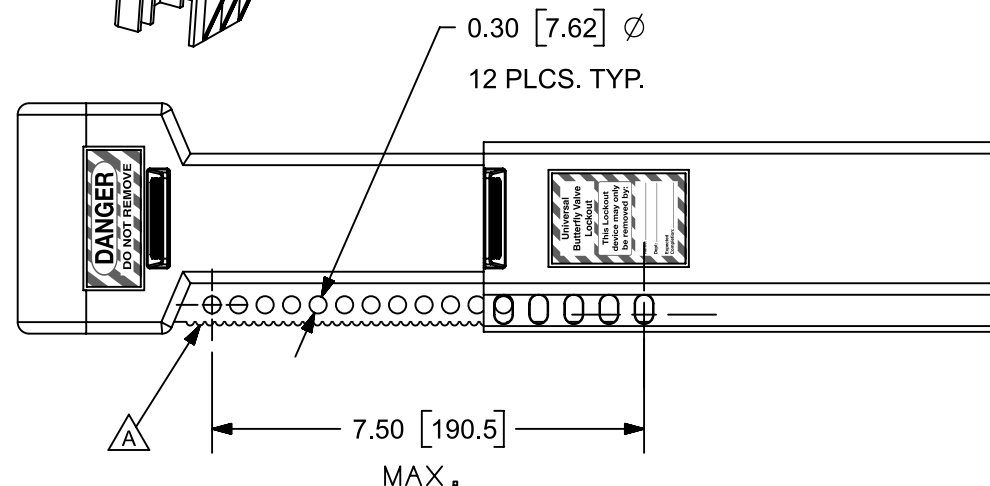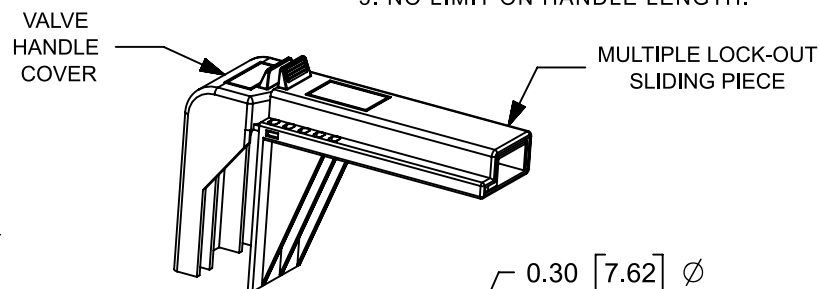

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
04A	8/6/2026	RVU	ANRO	MSAD	A. ADDED SERRATIONS ON THIS VALVE HANDLE COVER.	GAECN07679
03A	3/11/2022	RVU	ANRO	RCMC	REPLACED ALL OLD PSL-BV1 MODEL TO CURRENT PSL-BV1 MODELS.	GAECN06143
2	11/11/16	RVU	CLW	JHAC	The value should be 215F (101°C), NOT (120°C).	GAECN03695
1	12/13/10	JHAC			ADDED NOTES.	6256
0	4/13/10	JHAC			DRAWING RELEASE.	6019

TITLE					
PSL-BV3					
LARGE BALL VAVE LOCKOUT DEVICE					
CUSTOMER DRAWING					
ITEM REVISION NAME					
100923A0/04					
DATASET FILE NAME			100923A0_DC/04A C10825 CUST DWG		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]					
.x ± .1 [2.54]		.xxx ± .03 [0.762]			
.xx ± .05 [1.27]		ANGLES ± 5 °			
		THIRD ANGLE PROJECTION		MATERIAL: RED POLYPROPYLENE	
				DRAWING NUMBER: C10825	
DRAWN BY	DATE	CHK	SCALE	SIZE	
JHAC	04/13/10	JHAC	1:4	SHT 1 OF 1	
				A	

2

1