

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A ±.03	W ±.01	C ±.02	M ±.03	H ±.01
P8-8RHT	#8	1.12 (28.45)	.42 (10.67)	.43 (10.92)	.91 (23.11)	.17 (4.32)
P8-8RNHT6	#8	1.09 (27.69)	.36 (9.25)	.43 (10.92)	.91 (23.11)	.17 (4.32)
P8-10RHT6	#10	1.14 (28.96)	.42 (10.67)	.43 (10.92)	.91 (23.11)	.20 (5.08)
P8-10RNHT6	#10	1.09 (27.69)	.36 (9.25)	.43 (10.92)	.91 (23.11)	.20 (5.08)
P8-14RHT6	1/4"	1.14 (28.96)	.47 (11.94)	.43 (10.92)	.91 (23.11)	.27 (6.86)
P8-56RHT6	5/16"	1.25 (31.75)	.59 (14.99)	.51 (12.95)	.95 (24.13)	.33 (8.38)
P8-38RHT6	3/8"	1.25 (31.75)	.59 (14.99)	.51 (12.95)	.95 (24.13)	.39 (9.91)

NOTES:

- FOR #8 AWG COPPER WIRE
- 650 F (343C) MAX. TEMP RATING
- SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
- MATERIAL:

STAMPING - .040" (1.02) THK COPPER,
NICKEL PLATED


- DIMENSIONS IN BRACKETS ARE MILLIMETERS
- INSTALLATION TOOL: CT-2600, CD-2600-P8
- WIRE STRIP LENGTH: 3/8 +1/32 -0 (9.5mm +.8 -0)

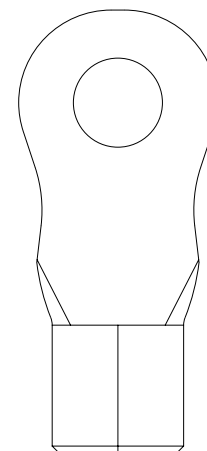


P8-10RHT6
CONFIGURATION
(NOT TO SCALE)



LISTED
587H
E52164

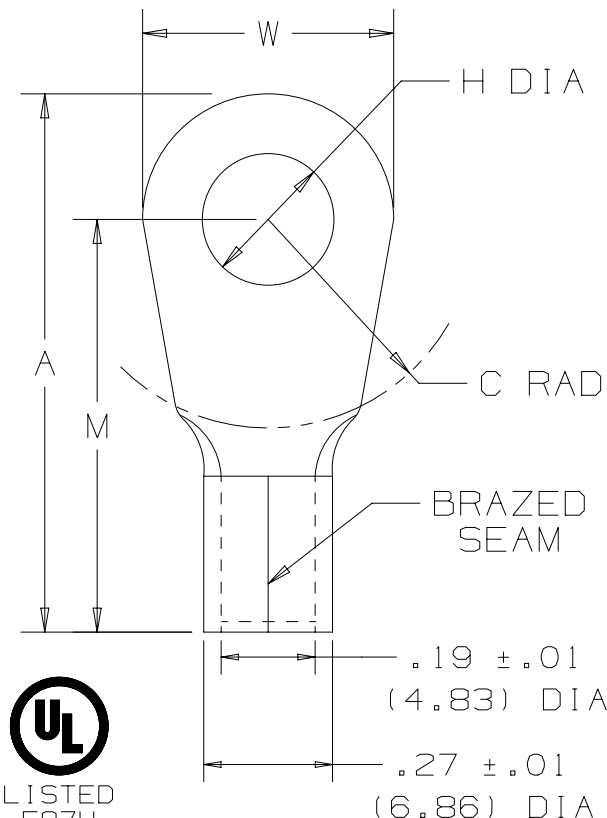

06	2/26	ANVM	ANVM	JSUN	UPDATED TITLE BLOCK DELETED P8-12RHT6	030770/00
05	8/11	SHOR	-	-	MODIFIED NOTE #3, REMOVED PACKAGE SIZES, ADDED UL LISTING	
03	5/09	BCT	-	-	MODIFIED P8-10RHT6 DIM W TO 0.42"	
02	1/09		-	-	ADDED P8-8RNHT6 & P8-10RHNT6	
01	6/08	SRB	-	-	REMOVED UL & CSA ADDED TEMP RATING	
00	6/08	BCT	-	-	RELEASE	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PART NUMBER		SEE TABLE	
TITLE			
#8 BARREL NON-INSULATED HIGH TEMPERATURE RING TONGUE			
CUSTOMER DRAWING			
ITEM REVISION NAME		N41741BA/06	
DATASET FILE NAME		N41741BA/06	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:	
.X ± .XX ± .03[.8]		SEE NOTES	
.XXX ± .010 [.3]		DRAWING NUMBER:	
ANGLES ±		A41741	
		THIRD ANGLE PROJECTION	
DRAWN BY	DATE	CHK	SCALE
BCT			NONE
SHT 1 OF 1		SIZE	
		A	