


1. STANDARD:
- USE WITH UPS CAPACITY: 72V REPLACEMENT VRLA BATTERY CARTRIDGE FOR 3KVA UPS ONLY
- BATTERY TYPE: VALVE REGULATED LEAD ACID-NON SPILLABLE
- NOMINAL INPUT/OUTPUT VOLTAGE: 72VDC
- BREAKER TYPE: N/A
- WEIGHT OF Pb(LEAD): 10.2KG
- WEIGHT OF H2SO4(SULFURIC ACID): 2.4KG
2. ADDITIONAL:
- NONE
3. ACCESSORY COMPONENTS:
- NONE

- NOTES:
1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN INCHES
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
4. ALL PURCHASED ITEMS CONFORM TO C2-0834 PANDUIT SPECIFICATION FOR CHEMICAL SUBSTANCES TO BE CONTROLLED IN PRODUCT AND PACKAGING

IDENTIFICATION:		
PART NUMBER	DESCRIPTION	SHIPPING WEIGHT (KG)
UVC072	72V REPLACEMENT LEAD ACID BATTERY CARTRIDGE 3KVA LEAD ACID UPS	16.93

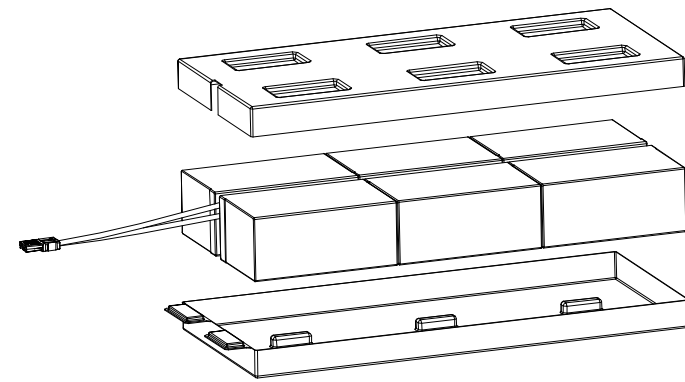

X 1

UPS VRLA BATTERY CARTRIDGE UVC072 CUSTOMER DRAWING									
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: MM (IN)									
PANDUIT									
N/A									
UVC072-DC									
SHT 1 OF 2									
Q2A	04/23/2009	DAI	GRZ	GLM/DJB	UPDATED DESCRIPTION	UVC072	THIRD ANGLE PROJECTION		
Q2A	03/10/2009	DAI	GRZ	GLM/DJB	RELEASE TO PRODUCTION	UVC072	VARIOUS		
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	SHT 1 OF 2		

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

4

3

2

1

CIRCUIT BOARD BUILDING BLOCKS

PART NUMBER	DESCRIPTION
1046-2865	BATTERY
4010-0330	BATTERY CARTRIDGE PLASTIC CASE
4010-0331	BATTERY CARTRIDGE PLASTIC CASE
3710-2085	SA30 BATTERY CONNECTOR
3918-8193	BATTERY CONNECTION CABLES

PANDUIT
18900 PANDUIT DRIVE, 60487, USA
WWW.PANDUIT.COM

REPLACEMENT BATTERY CARTIDGE

CAPACITY: 9 Ah
BATTERY: 72V --- 50 A
BATTERY QUANTITY: 6 Cell

BATTERY TYPE: VALVE REGULATED LEAD ACID

PROHIBIDO SU USO EN EXTERIORES MADE IN xxx HECHO EN XXX

P/N: UVC072

UPC# 6 13056 82557 4

BATTERY CARTRIDGE FOR 3KVA 72VDC UPS ONLY




LEGEND

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
[Symbol]	CIRCUIT BREAKER	[Symbol]	AC-DC CONVERTER	[Symbol]	DIODE
[Symbol]	RELAY	[Symbol]	DC-DC CONVERTER	[Symbol]	TRANSISTOR
[Symbol]	DR (CIRCUIT BREAKER)	[Symbol]	BATTERY SYMBOL	[Symbol]	FUSE
[Symbol]	DC-DC CONVERTER	[Symbol]	CONNECTION TERMINAL	[Symbol]	BATTERY UNIT

UPS VRLA BATTERY CARTRIDGE UVC072 CUSTOMER DRAWING

REV DATE BY CHK APR DESCRIPTION ECN

DATE 03/10/2022 MJD VARIOUS SHT 2 OF 2 D

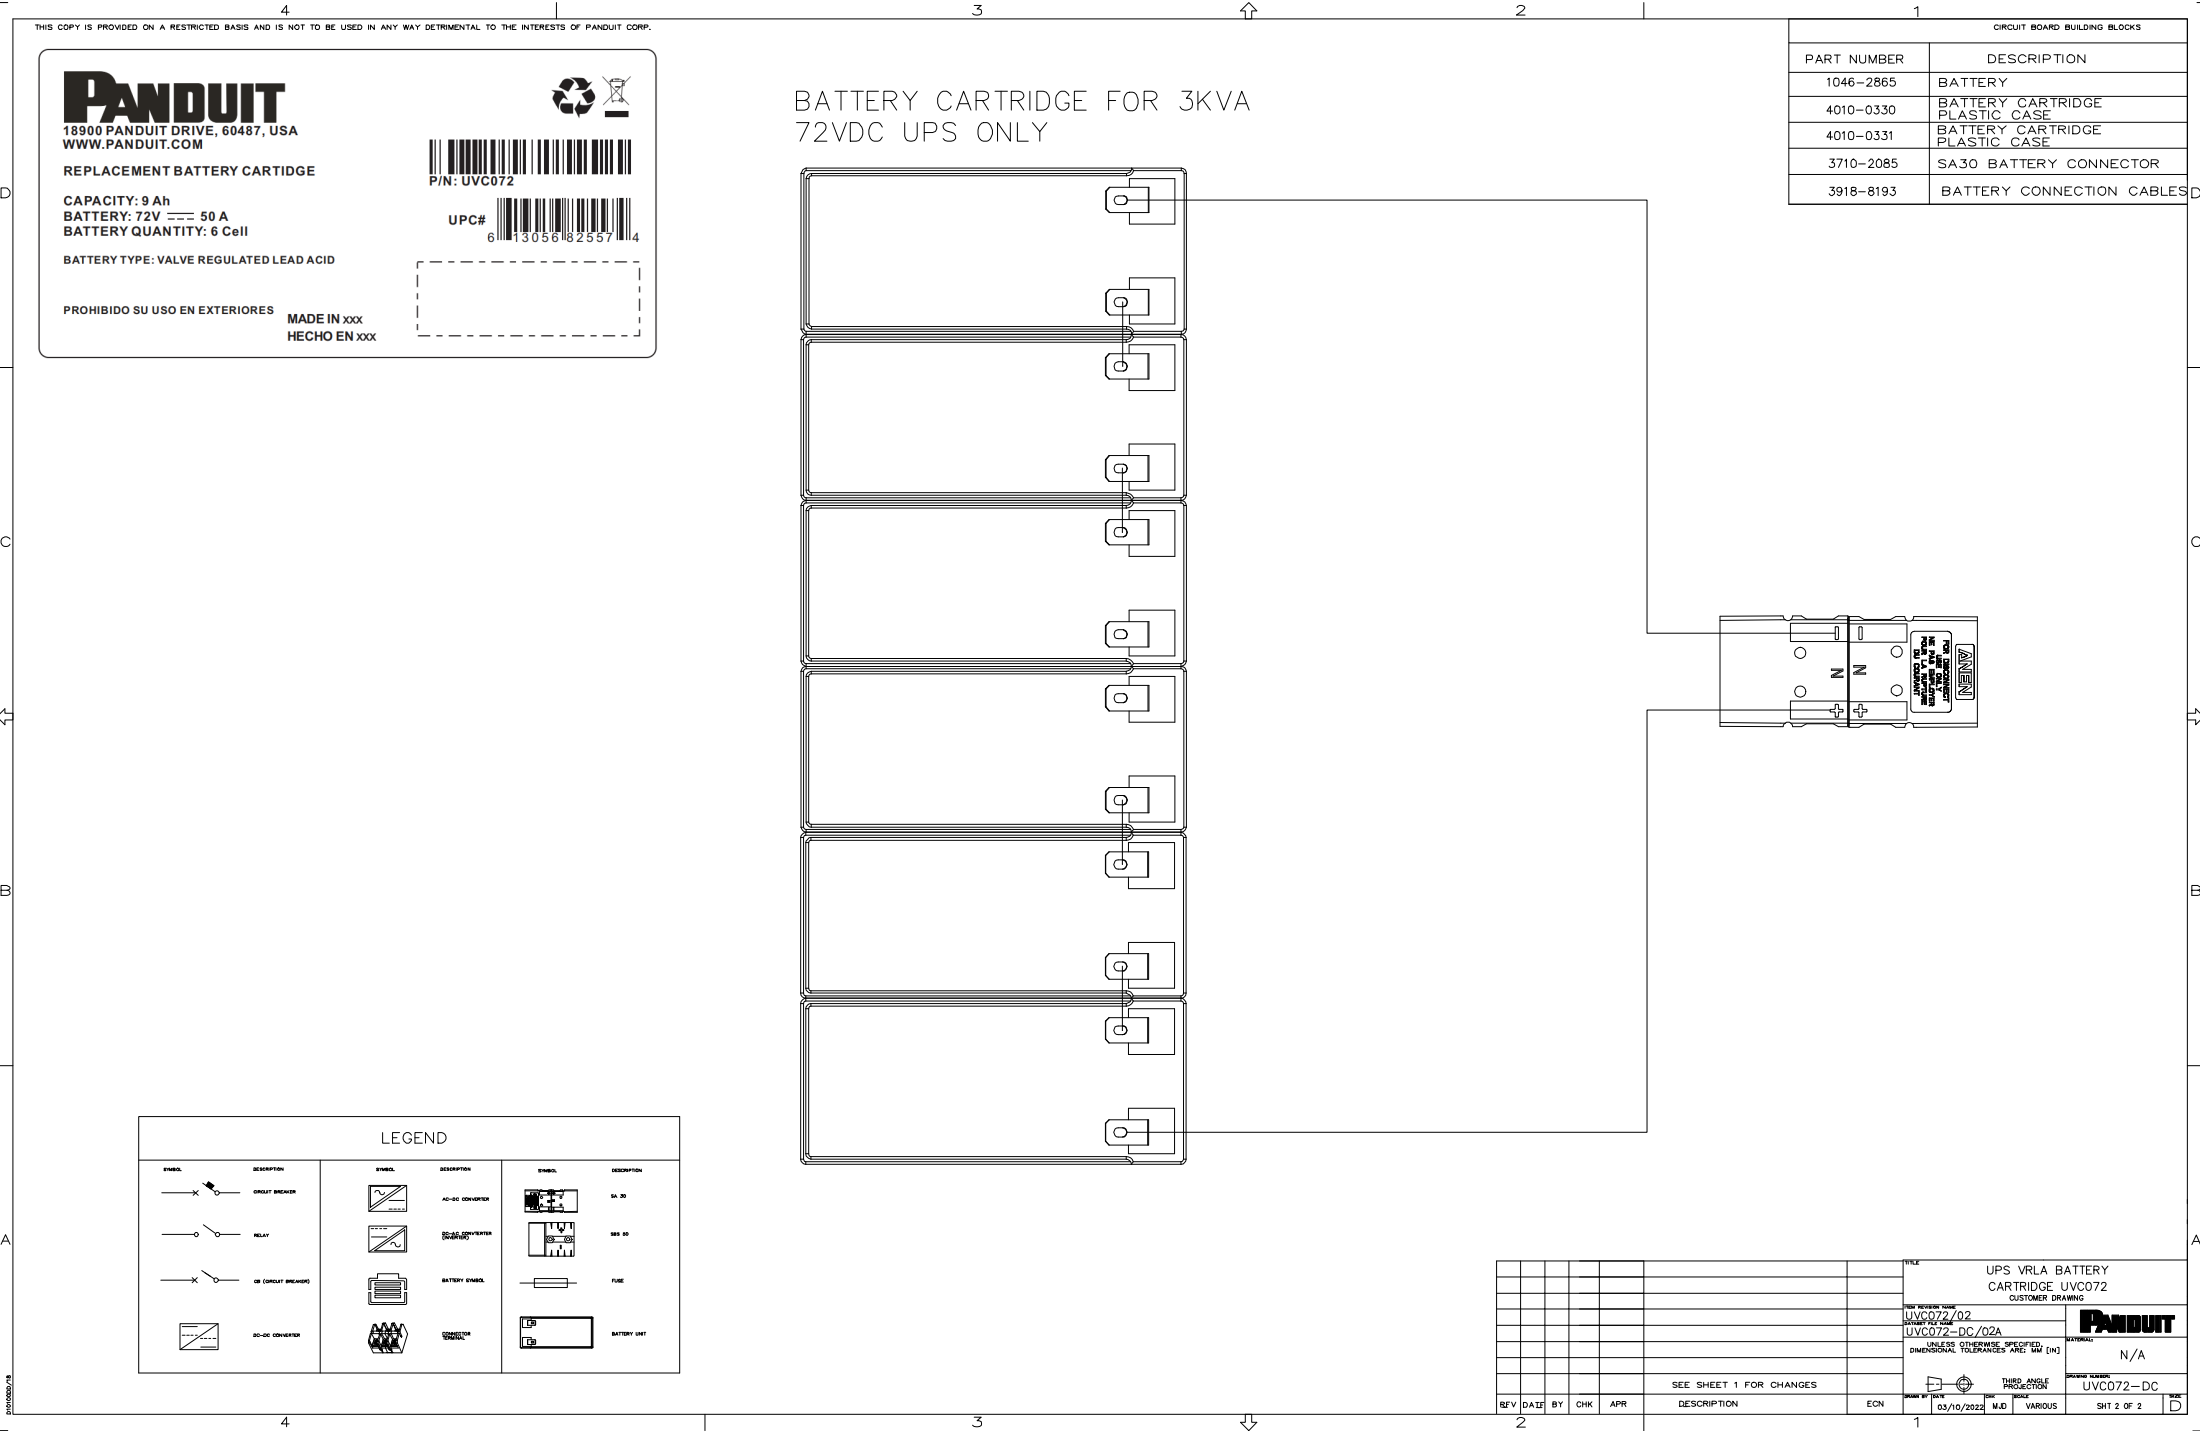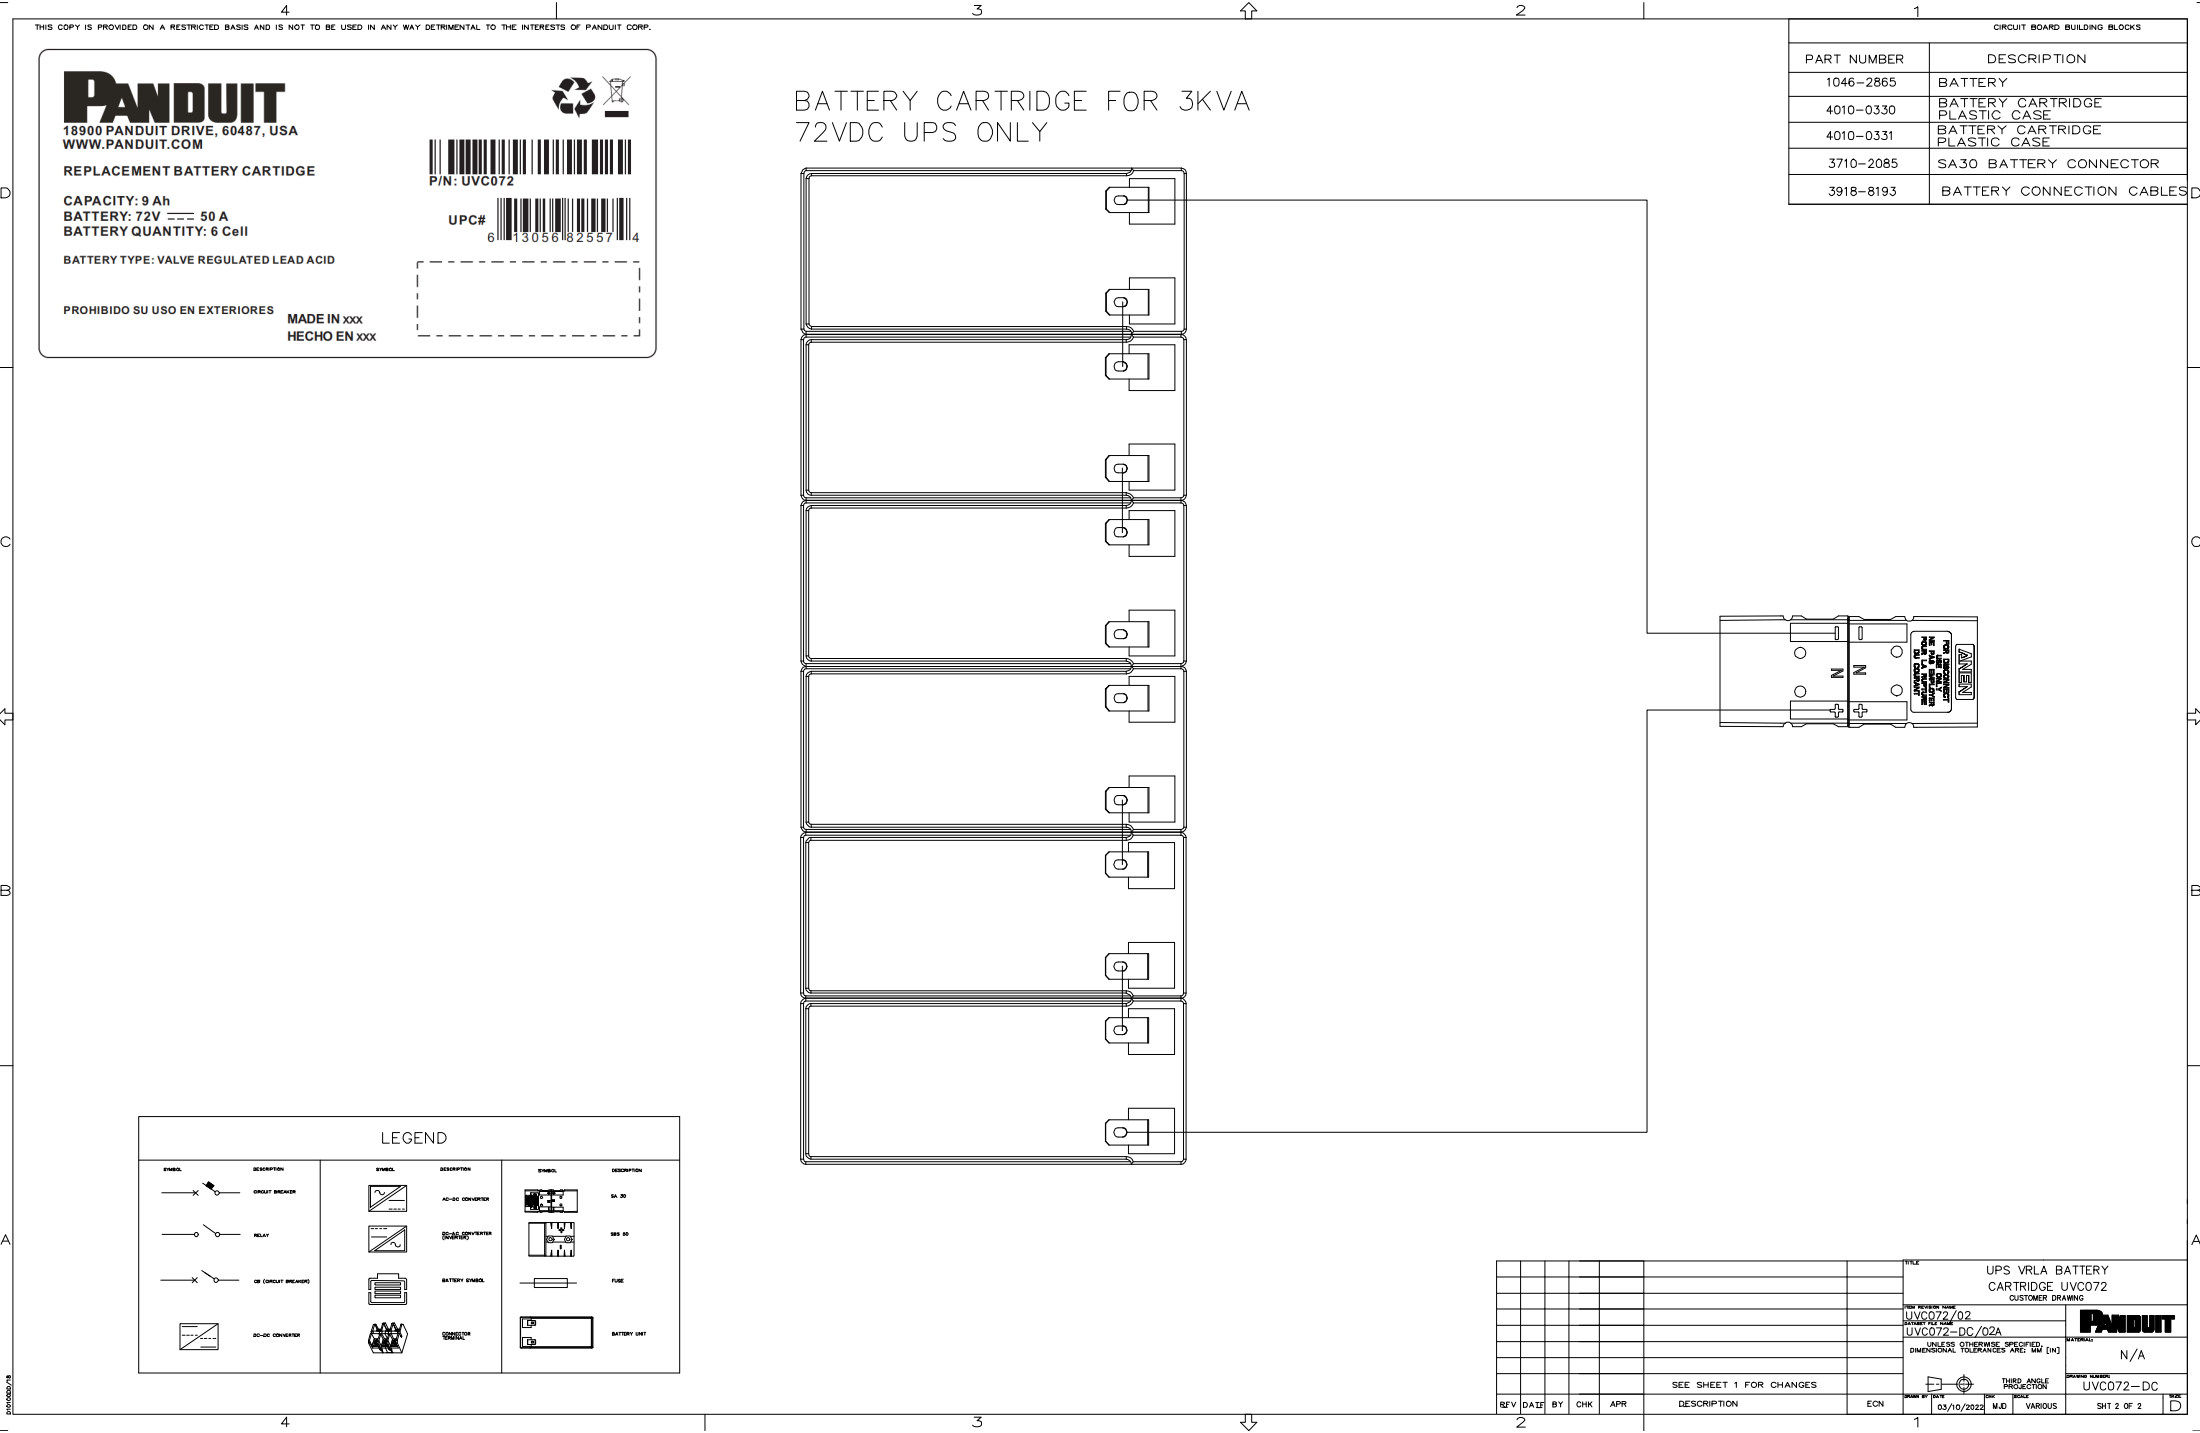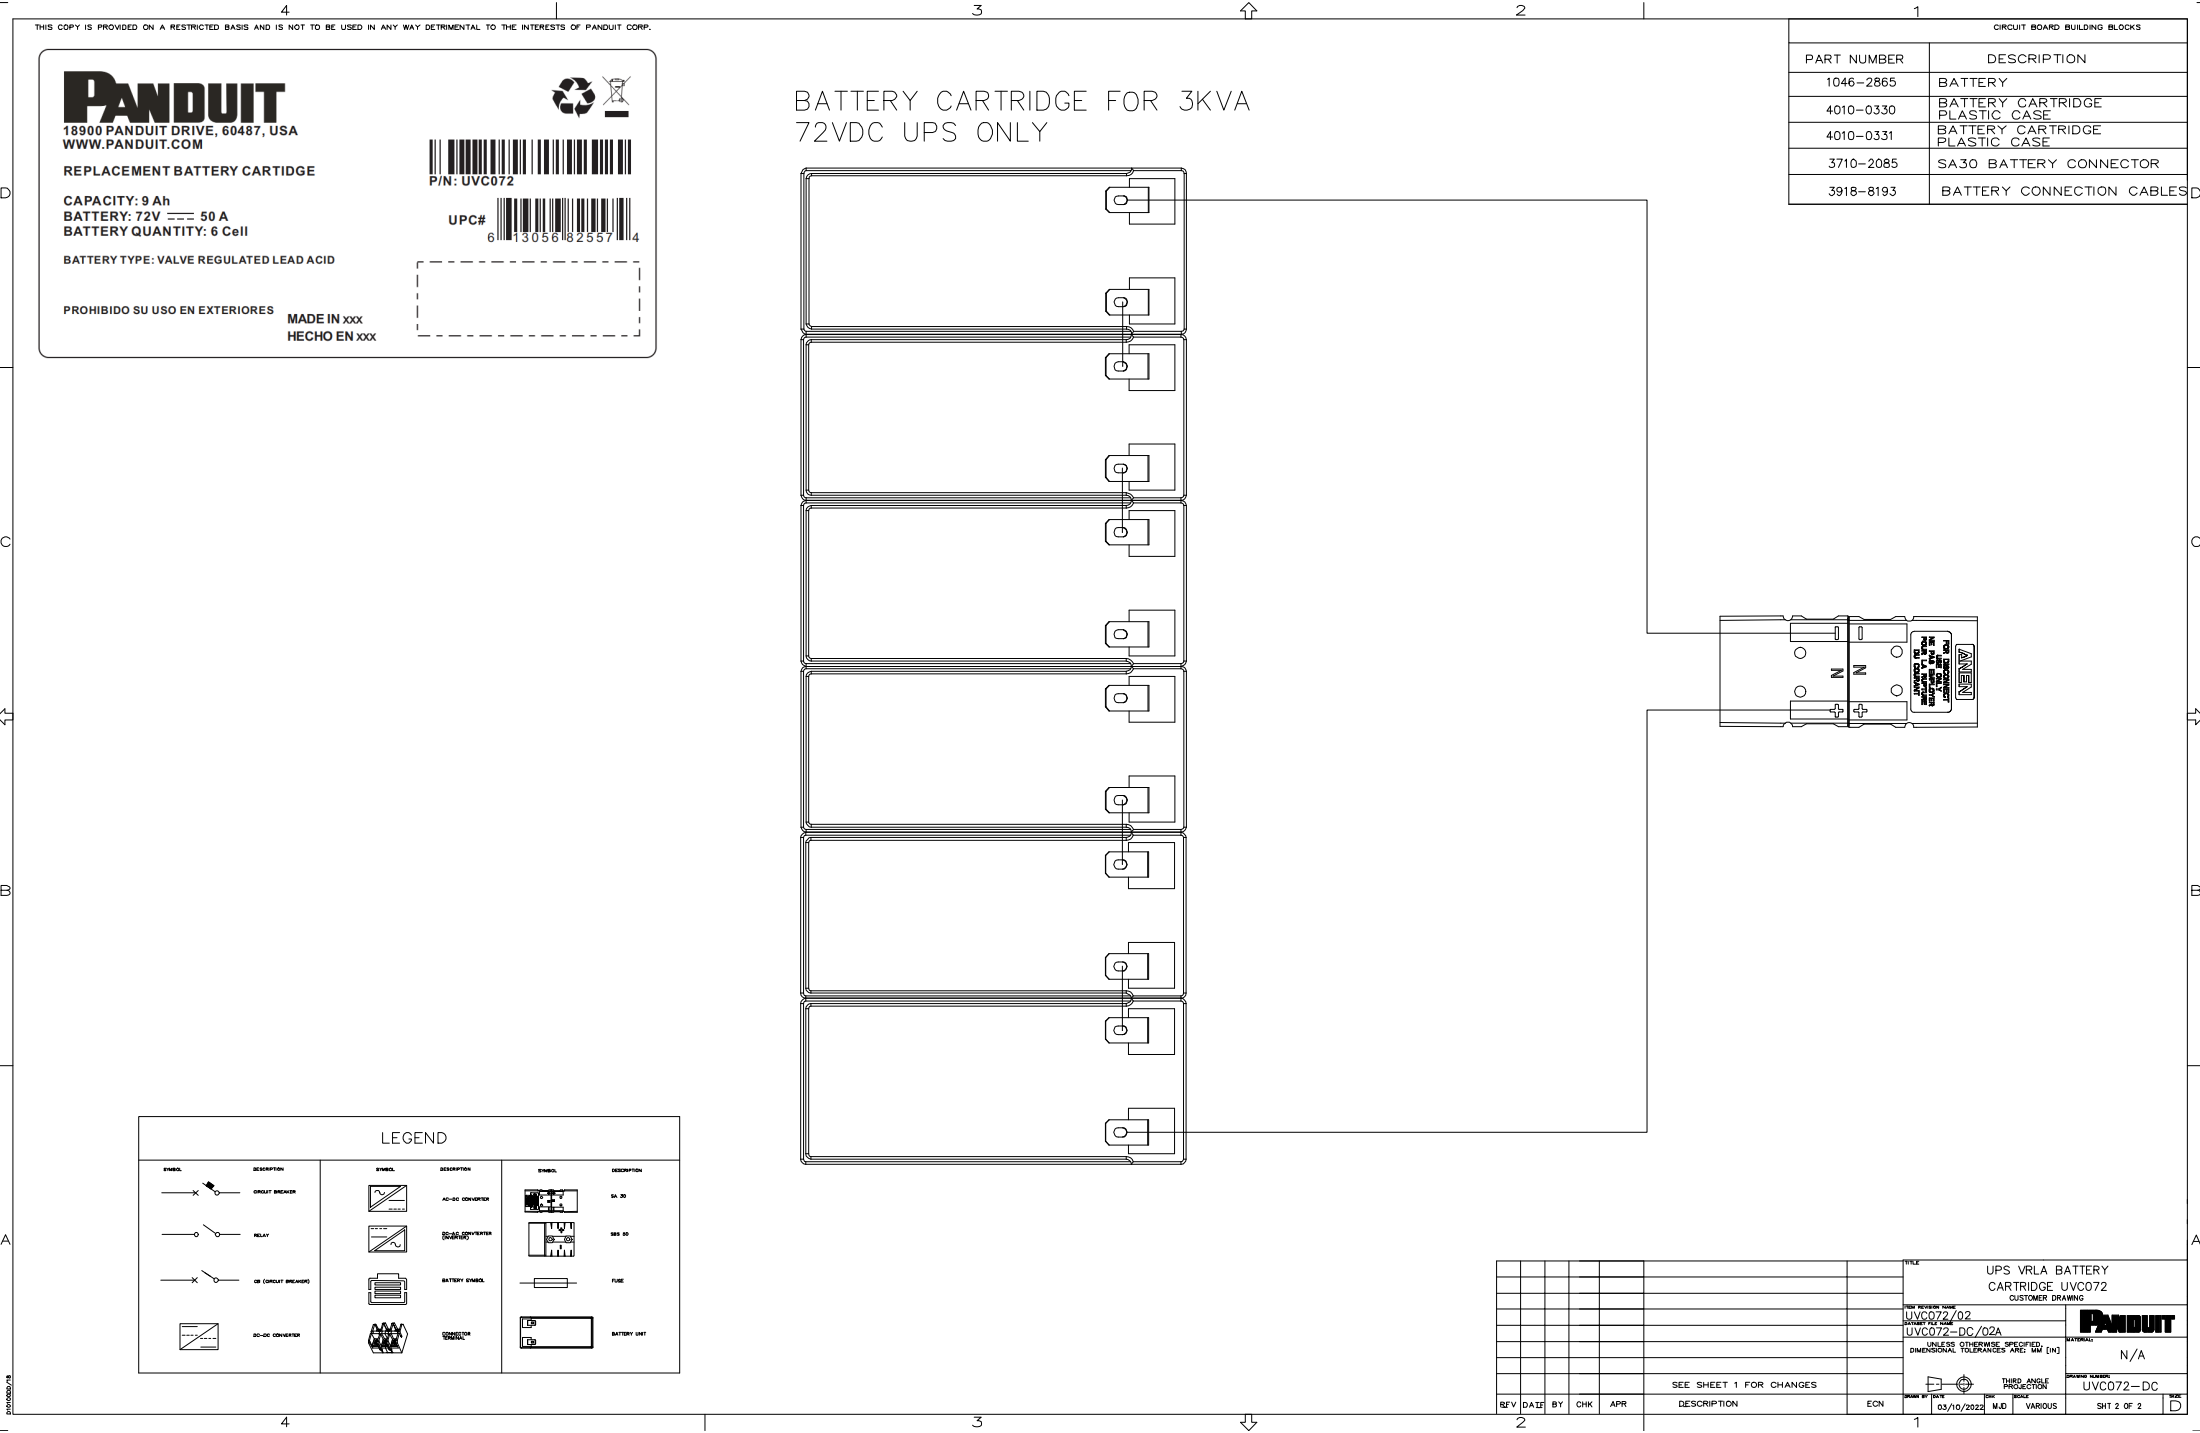

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

4 3 2 1

PANDUIT
18900 PANDUIT DRIVE, 60487, USA
WWW.PANDUIT.COM

REPLACEMENT BATTERY CARTIDGE

CAPACITY: 9 Ah
BATTERY: 72V --- 50 A
BATTERY QUANTITY: 6 Cell

BATTERY TYPE: VALVE REGULATED LEAD ACID


PROHIBIDO SU USO EN EXTERIORES

MADE IN xxx
HECHO EN xxx


P/N: UVC072

UPC#
6 13056 82557 14

BATTERY CARTRIDGE FOR 3KVA
72VDC UPS ONLY

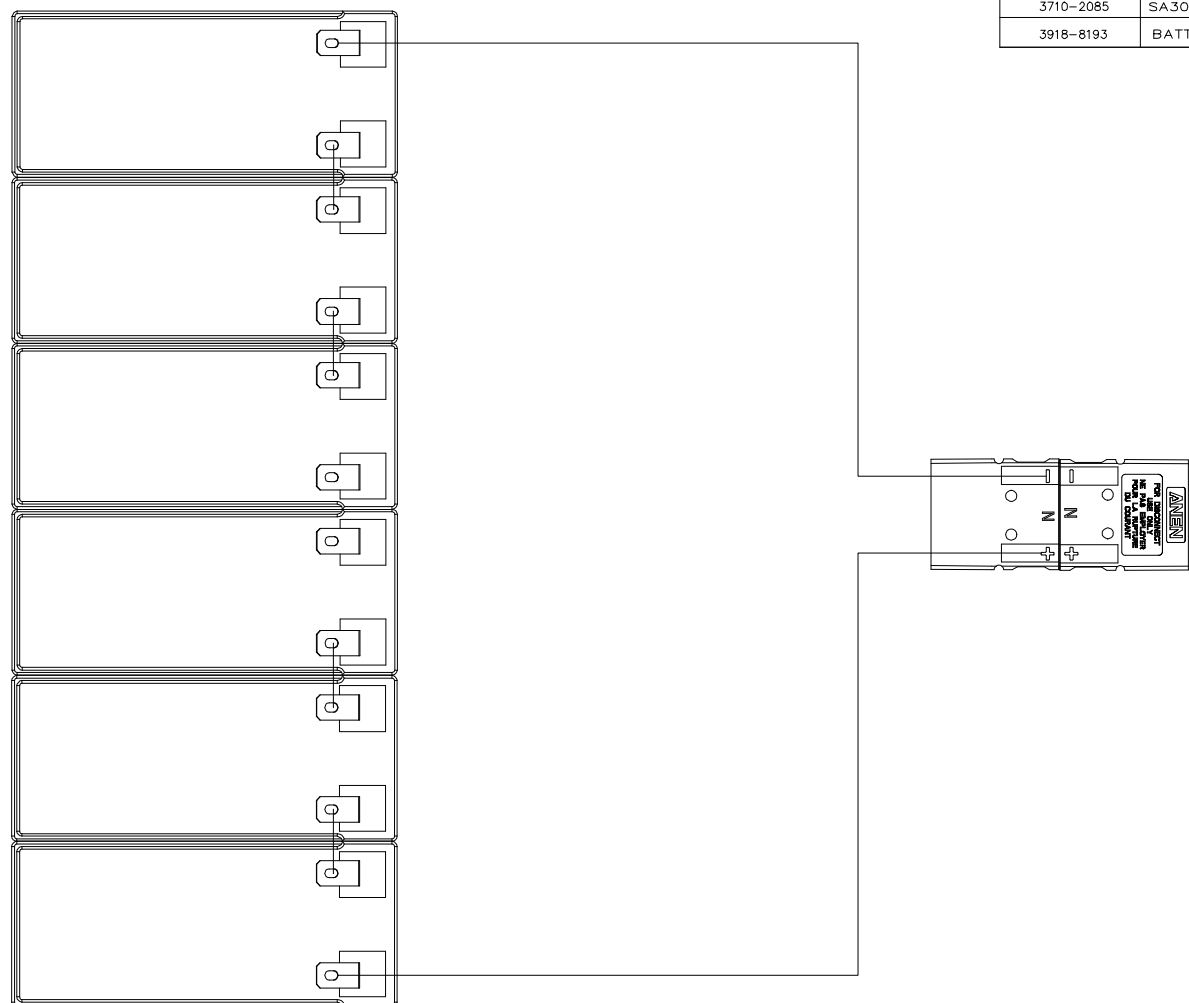

LEGEND

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
	CIRCUIT BREAKER		AC-DC CONVERTER		SA 20
	RELAY		DC-DC CONVERTER		SB 20
	OR (CIRCUIT BREAKER)		BATTERY SYMBOL		FUSE
	DC-DC CONVERTER		CONNECTION TERMINAL		BATTERY UNIT

PART NUMBER	DESCRIPTION
1046-2865	BATTERY
4010-0330	BATTERY CARTRIDGE PLASTIC CASE
4010-0331	BATTERY CARTRIDGE PLASTIC CASE
3710-2085	SA30 BATTERY CONNECTOR
3918-8193	BATTERY CONNECTION CABLES

UPS VRLA BATTERY
CARTRIDGE UVC072
CUSTOMER DRAWING

NEW PANDUIT PART
UVC072/02
SUBSTITUTED FOR
UVC072-DC/02A

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCES ARE IN [IN]

THIRD ANGLE
PROJECTION

DATE: 03/10/2022
BY: MJD
VARIOUS

UVC072-DC

SHT 2 OF 2

SEE SHEET 1 FOR CHANGES

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
2						