
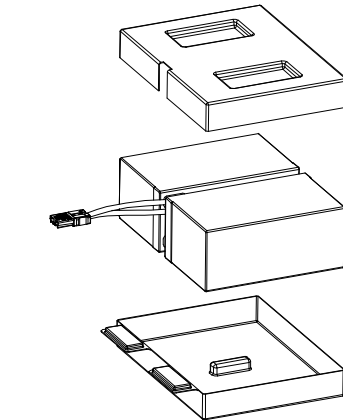



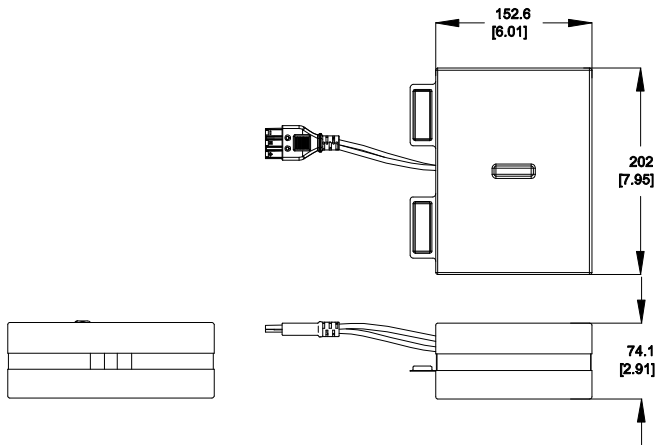

1. STANDARD:
- USE WITH UPS CAPACITY: 24V REPLACEMENT VRLA BATTERY CARTRIDGE FOR 1KVA UPS ONLY
- BATTERY TYPE: VALVE REGULATED LEAD ACID—NON SPILLABLE
- NOMINAL INPUT/OUTPUT VOLTAGE: 24VDC
- BREAKER TYPE: N/A
- WEIGHT OF Pb(LEAD): 3.4KG
- WEIGHT OF H2SO4(SULFURIC ACID): 0.8KG
2. ADDITIONAL:
- NONE
3. ACCESSORY COMPONENTS:
- NONE

- NOTES:
1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN INCHES
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES.
3. VISIT OUR ON—LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
4. ALL PURCHASED ITEMS CONFORM TO C2—0834 PANDUIT SPECIFICATION FOR CHEMICAL SUBSTANCES TO BE CONTROLLED IN PRODUCT AND PACKAGING

IDENTIFICATION:		
PART NUMBER	DESCRIPTION	SHIPPING WEIGHT (KG)
UVC024	24V REPLACEMENT LEAD ACID BATTERY CARTRIDGE 1KVA LEAD ACID UPS	6

UPS VRLA BATTERY CARTRIDGE UVC024 CUSTOMER DRAWING									
REV. RECORD									
UVC024/02									
UVC024—DC/02A									
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: MM (IN)									
N/A									
THIRD ANGLE PROJECTION									
UVC024—DC									
SHT 1 OF 2									
D									

Q2A	04/23/2009	DL	CLM/DLB	SZ REMOVED	UVC024
Q1A	03/10/2009	DL	CLM/DLB	UPDATED DESCRIPTION	UVC024
Q0A	03/10/2009	DL	CLM/DLB	RELEASE TO PRODUCTION	UVC024
REV	DATE	BY	CHK	APR	DESCRIPTION
					ECN

DATE	03/10/2022	BY	MJD	VARIOUS
------	------------	----	-----	---------

CIRCUIT BOARD BUILDING BLOCKS	
PART NUMBER	DESCRIPTION
1046-2865	BATTERY
4000-4115	BATTERY CARTRIDGE PLASTIC CASE
4000-4116	BATTERY CARTRIDGE PLASTIC CASE
3710-2085	SA30 BATTERY CONNECTOR
3918-8376	BATTERY CONNECTION CABLES