

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT

18900 PANDUIT DRIVE, 60487, USA
WWW.PANDUIT.COM

REPLACEMENT BATTERY CARTIDGE

CAPACITY: 9 Ah
BATTERY: 48 V --- 50 A
BATTERY QUANTITY: 4 Cell

BATTERY TYPE: VALVE REGULATED LEAD ACID

PROHIBIDO SU USO EN EXTERIORES

MADE IN xxx
HECHO EN xxx





P/N: UVC048

UPC#



BATTERY CARTRIDGE FOR 2KVA
48VDC UPS ONLY

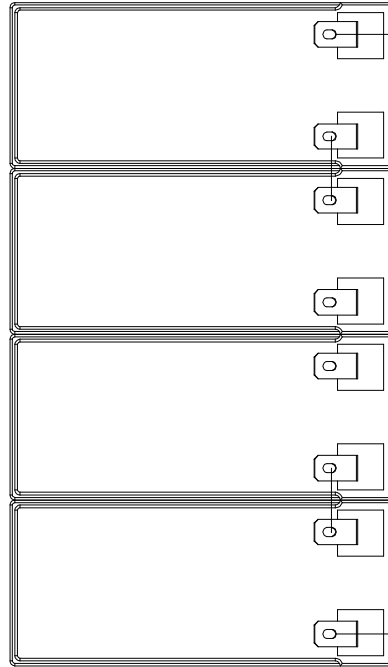

LEGEND

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
	CIRCUIT BREAKER		AC-DC CONVERTER		SA 30
	RELAY		DC-DC CONVERTER		SB 30
	CB (CIRCUIT BREAKER)		BATTERY SYMBOL		FUSE
	DC-DC CONVERTER		CONNECTOR SYMBOL		BATTERY UNIT

CIRCUIT BOARD BUILDING BLOCKS	
PART NUMBER	DESCRIPTION
1046-2865	BATTERY
4010-0328	BATTERY CARTRIDGE
4010-0329	PLASTIC CASE
3710-2085	SA30 BATTERY CONNECTOR
3918-8191	BATTERY CONNECTION CABLES

SEE SHEET 1 FOR CHANGES									
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE		
							UPS VRLA BATTERY CARTRIDGE UVC048 CUSTOMER DRAWING		
							NEW RECORD COPY UVC048/02 PRINTED BY UVC048-DC/02A		
							UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: MM (IN)		
							PANDUIT		
							N/A		
							THIRD ANGLE PROJECTION		
							UVC048-DC		
							SHT 2 OF 2		