

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P36G33M-XXYZ	SEE SHEET 2

SPECIFICATION:

1. STANDARD
- UNIT TYPE:
ORIENTATION:
OUTLET QTY & TYPE:
INPUT VOLTAGE:
INPUT CURRENT:
BREAKER QTY & TYPE:
INPUT PHASE:
RATED POWER:
INPUT PLUG:
INPUT POWER CORD:
REGULATORY STANDARD:

MONITORED & SWITCHED PER OUTLET
VERTICAL, 0U FULL
(24)C13, (12)C19
415VAC (NA) / 346-415VAC (EU)
30A (24A DERATED)(NA) / 32A (EU)
(6) 20A, SINGLE-POLE
THREE-PHASE (WYE)
DUAL-RATED: 17.3kVA (NA) / 22.1kVA (EU)
SEE TABLE SHEET 2
SEE TABLE SHEET 2
RoHS COMPLIANT

2. ADDITIONAL:
- OUTLET CONTROL RELAY: NORMALLY OPEN 80AMP INRUSH
FIRMWARE TO BE v3.3.1.1 OR HIGHER

3. ACCESSORIES:
- (1) QUICK-START GUIDE

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PRODUCT
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P36G33M-XXYZ

XX: FINISHED GOOD COLOR
BL = BLACK YL =YELLOW
RD =RED BU =BLUE
WH =WHITE GN =GREEN

Y: INPUT FEED TYPE
1 =TOP-END FED
2 =BOTTOM-END FED

Z: INPUT CORD LENGTH
A =1 METER
B =2 METER
C =3 METER

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.

SIGN
DATE
PRINT


TITLE
INTELLIGENT SERIES PDU
P36G33M-XXYZ
CUSTOMER DRAWING

ITEM REVISION NAME	
DATASET FILE NAME	


UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]		MATERIAL:													
		N/A													
TOLERANCE RESOLUTION		<table><tr><td>Tolerance (mm)</td><td></td></tr><tr><td>0-1.5</td><td>+0.3</td></tr><tr><td>1.6-2.5</td><td>+0.4</td></tr><tr><td>2.6-5.0</td><td>+0.5</td></tr><tr><td>5.1-10.0</td><td>+0.6</td></tr><tr><td>10.1-15.0</td><td>+0.7</td></tr></table>		Tolerance (mm)		0-1.5	+0.3	1.6-2.5	+0.4	2.6-5.0	+0.5	5.1-10.0	+0.6	10.1-15.0	+0.7
Tolerance (mm)															
0-1.5	+0.3														
1.6-2.5	+0.4														
2.6-5.0	+0.5														
5.1-10.0	+0.6														
10.1-15.0	+0.7														
DRAWING NUMBER:		P36G33M DC													

BY	DATE	CHK	SCALE	SHEET 1 OF 2	SIZE
WAC	11/21/2021	-	NTS		


01B	8/25/2022	WAC	MIM	MJD	PN P36G33M WAS P36G34M IN TABLE UPPER RIGHT HAND CORNER OF SHEET1	P36G33M
01A	12/03/2021	WAC	PJST	MJD	INITIAL DC RELEASE	P36G33M
REV.	DATE	BY	CHK	APR	DESCRIPTION	ECN
REVISIONS						

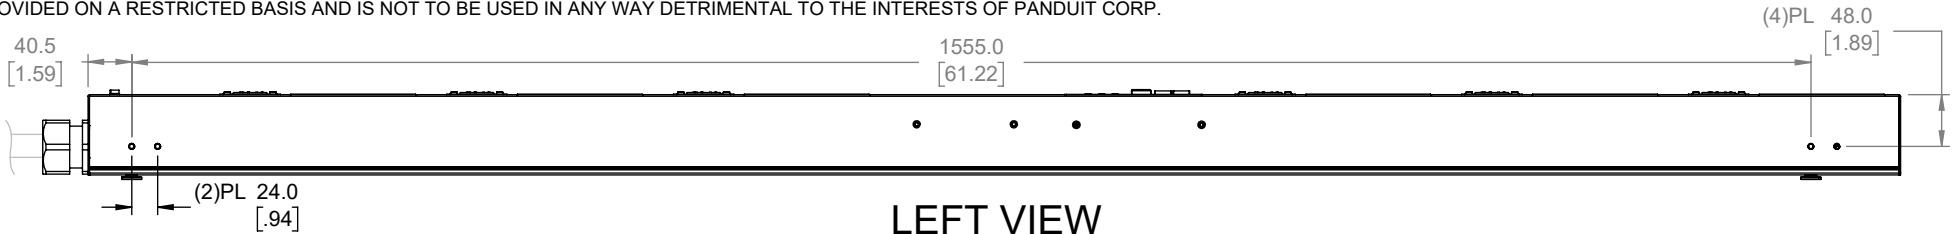


LEFT VIEW

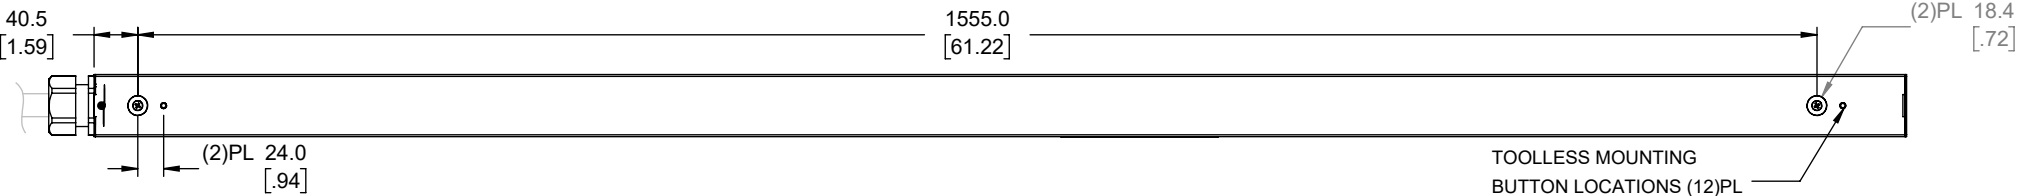


REAR VIEW

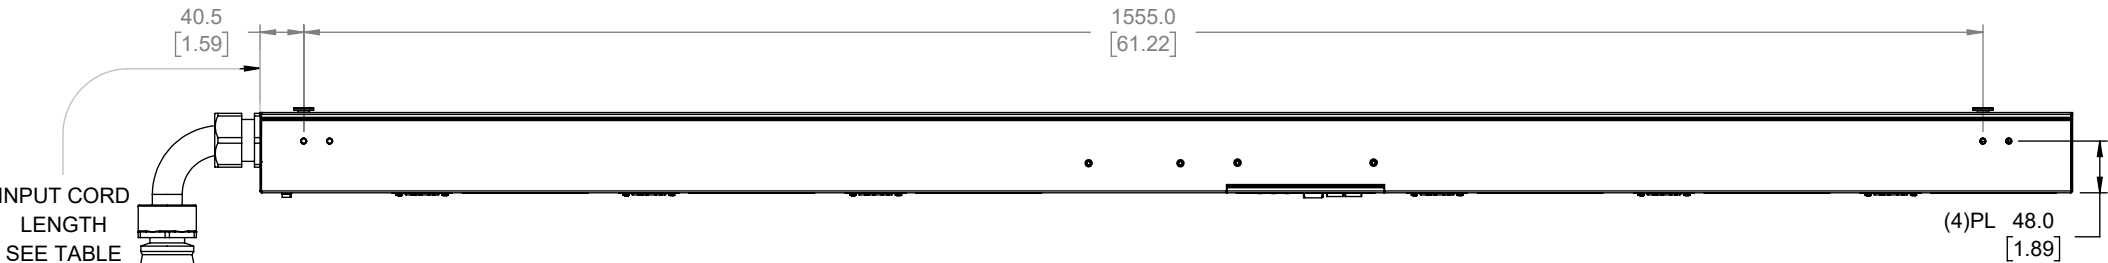

RIGHT VIEW

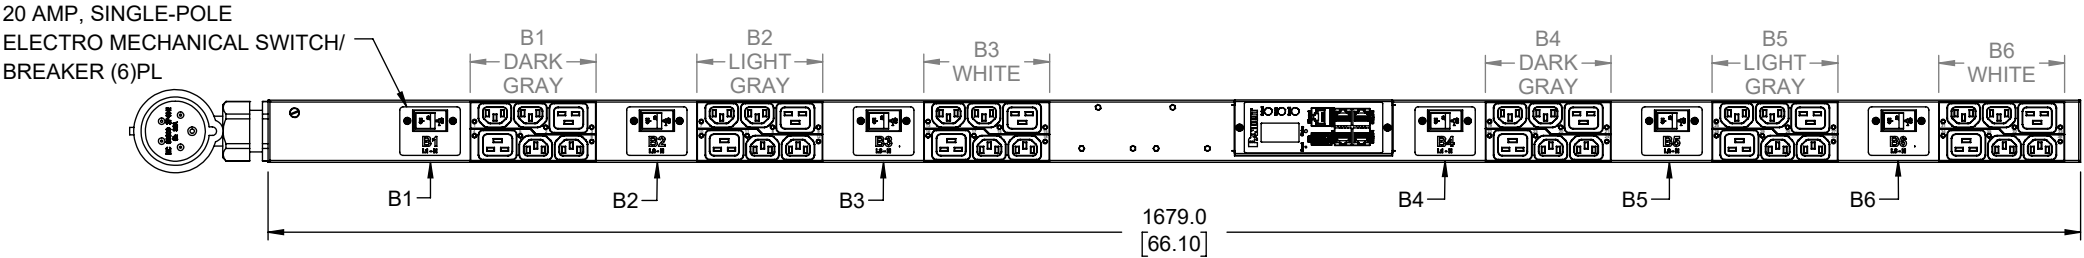


FRONT VIEW



BOTTOM VIEW

PLUG / RECEPTACLE BLOCK



PLUG
IEC 60309, 4P 5W, 6H
IP44 (SPLASHPROOF)
30A/ 32A, 415VAC MAX RATED INPUT
(24A DERATED)



RECEPTACLE
IEC 60320 C13
10A, 250V MAX RATED OUTPUT



RECEPTACLE
IEC 60320 C19
16A, 250V MAX RATED OUTPUT

