


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART #	WIRE RANGE AWG [mm ²]	TAB SIZE in. [mm]	COLOR	MAX. INSUL. in. [mm]	DIMENSIONS in. [mm]	
					L ± .03 [0,8]	W ± .01 [0,3]
EDV18-250PK	#22-18 [0,5-1,0]	.250 X .032 [6,4 X 0,8]	RED	.145 [3,7]	.87 [22,0]	.26 [6,6]
*EDV14-250PK	#16-14 [1,5-2,5]		BLUE	.165 [4,2]	.87 [22,0]	.26 [6,6]

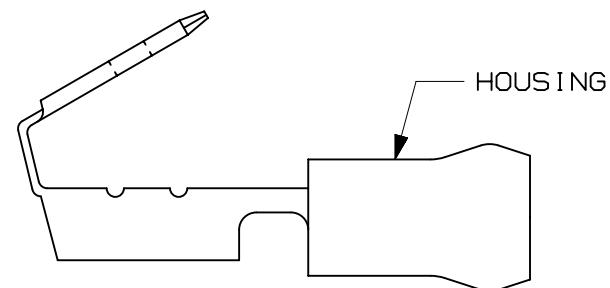

*NOT cULus LISTED


NOTES:

- cULus LISTED FOR:
 - STRANDED COPPER WIRE ONLY
 - 167°F [75°C] MAX. OPERATING TEMPERATURE
 - 300 V. MAX VOLTAGE RATING
- MATERIAL:
 - STAMPING: .016" (0.4) THK BRASS, TIN PLATED
 - HOUSING: VINYL
- INSTALLATION TOOLS: KST-2000C
- WIRE STRIP LENGTH: 9/32" $\begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ [6,8mm $\begin{smallmatrix} +0,8 \\ -0 \end{smallmatrix}$]
- SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- PARTS ARE RoHS COMPLIANT

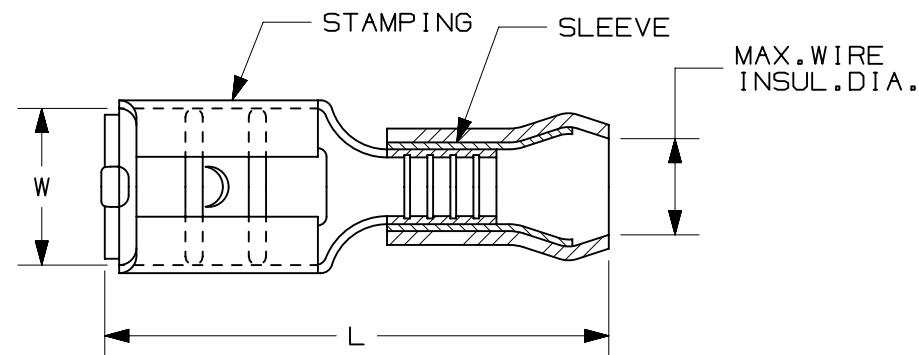

LISTED
19X5
E78522

01	1/28/23	JHNU	JHNU	MRWA	REVISED WIRE RANGE FOR EDV18-250PK: 22-18 WAS 22-16 REMOVED UL LISTING FROM EDV14-250PK	128553
00	9/22	JHNU	BDK	JADE	DRAWING RELEASED	125831
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

TITLE						
STRONGHOLD PIGGYBACK DISCONNECT VINYL INSULATED, METAL SLEEVE #22-14 AWG						
CUSTOMER DRAWING						
ITEM REVISION NAME						
02937NDZ/01						
DATASET FILE NAME						
02937NDZ-DC/01						
 UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 ° THIRD ANGLE PROJECTION				MATERIAL:		
				SEE NOTES		
				DRAWING NUMBER:		
				02937NDZ - DC		
DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1		SIZE
JHNU	9/22	BDK	NTS			A