

| PART NUMBER | DESCRIPTION                                                                         | DIM A                         | COLOR (-XX)      | SHIPPING WEIGHT (KG) |
|-------------|-------------------------------------------------------------------------------------|-------------------------------|------------------|----------------------|
| E24G07L     | EL2P 72/69KW MSPO PDU, (24)C13/C15/C19/C21, IEC60309 3P+N+E 6H 100A/125A (IP67)     | 3000 +254/-127 [118.1 +10/-5] | BLACK (RAL 9005) | 18.5                 |
| E24G07LTAA  | TAA EL2P 72/69KW MSPO PDU, (24)C13/C15/C19/C21, IEC60309 3P+N+E 6H 100A/125A (IP67) | 3000 +254/-127 [118.1 +10/-5] | BLACK (RAL 9005) | 18.5                 |

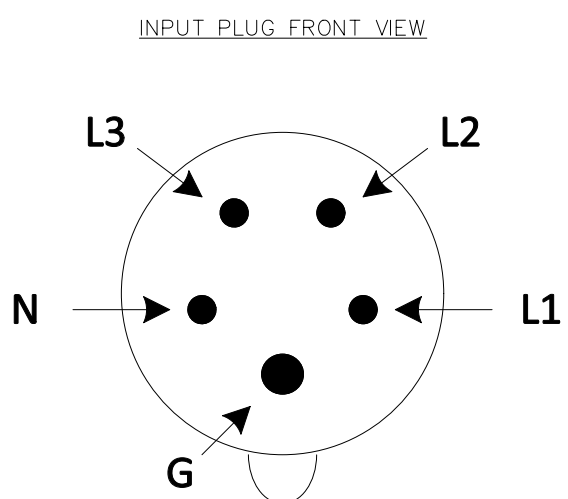


1. STANDARD:

|                     |                                         |
|---------------------|-----------------------------------------|
| UNIT TYPE:          | MSPO                                    |
| ORIENTATION:        | VERTICAL, OU FULL                       |
| OUTLET QTY & TYPE:  | (24)C13/C15/C19/C21                     |
| INPUT VOLTAGE:      | 200-240/346-415VAC                      |
| INPUT CURRENT:      | 125A (100A DERATED)/125A (100A DERATED) |
| BREAKER QTY & TYPE: | (12) 30AMP, SINGLE-POLE                 |
| INPUT PHASE:        | 3 PHASE WYE, L-N                        |
| RATED POWER:        | 72/69KVA                                |
| INPUT PLUG:         | IEC 60309 3P+N+E 6H 100A/125A (IP67)    |

3. ACCESSORIES:  
PRODUCT SAFETY WARNING SHEET

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN[INCHES]

[illegible]