25kV	600A Deadbreak Cam-Op Link	K650LK-C



Features:

- **25kV, 600 Amp Deadbreak Rated Cam-Op Link**
- **Provides 200 Amp tap for test and ground connections**
- **100% Peroxide-cured insulation**
- **Cam-Op lever for hotstick operation and easy install/remove**

K650LK-C Deadbreak Cam-Op Link

Applications:

The Elastimold® K650LK-C Cam-Op system is designed to use pin and socket connectors to provide a visible open on a primary cable system. After testing and grounding the Cam-Op Link is removed providing a visible open. The K650LK-C Cam-Op system can be used to retrofit to existing equipment. The K650LK-C allows hotstick operations to be completed without moving the cable. The Cam connect/disconnect lever allows for easy installation or removal by hotstick. The K650LK-C provides a 200 Amp Loadbreak interface on top for testing and grounding purposes. The Elastimold® K650-LK-C mates with the following Elastimold® products:

- 370TR test rod
- 370GLR grounding elbow
- 275DR/DRG insulated cap

Ratings:

Meets ANSI/IEEE Standard 386, Latest Revision


For 25kV Voltage Class:

15.2kV Max Phase-to-Ground – Operating Voltage
26.3kV Max Phase-to-Phase
125kV BIL – Impulse Withstand (1.2 x 50 microsecond wave)
40kV AC – One minute withstand
78kV DC – 15 minutes withstand
19kV AC – Corona Extinction @ 3pC sensitivity

200 A Loadbreak Interface
200 Amp – Continuous and Loadbreak
10kA Sym – 10 Cycles Momentary & Fault Close

600 A Deadbreak Connection
600 Amp – Continuous
25kA Sym – 10 Cycle Momentary

25kV	600A Deadbreak Cam-Op Link	K650LK-C

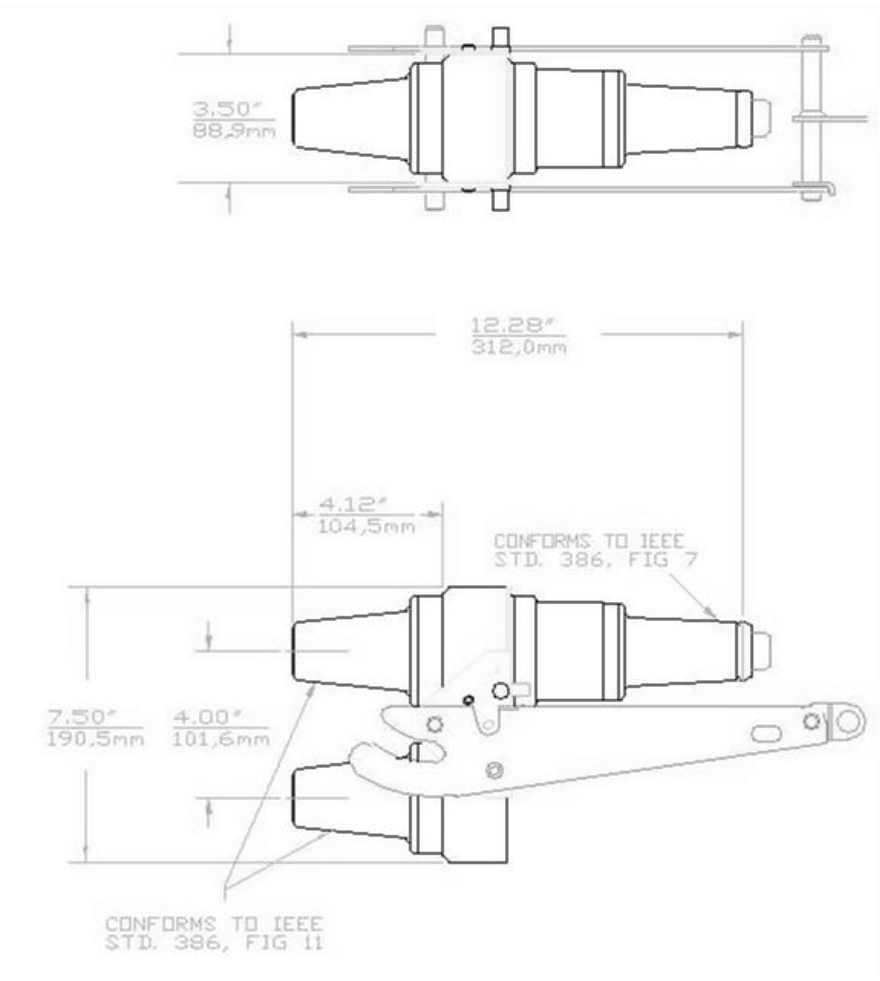

Ordering Instructions:

To order, specify number **K650LK-C** cam-op link.

Each kit contains the following:

1	Cam-Op Link	K650LK-C
1	Protective shipping cap	2701-41
1	Installation Instruction	IS-0409
3	Lubricant, Tube	82-08