

c UL us LISTED

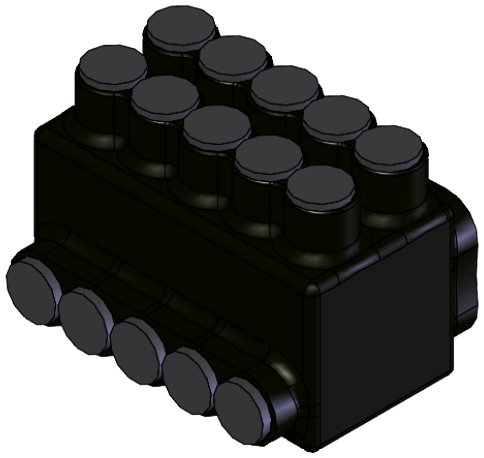


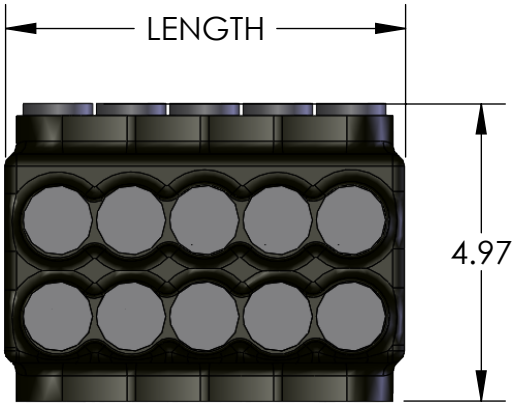

REMOVABLE CAP
FOR DUAL ENTRY
(INSERT IN OTHER SIDE)

3/8 INTERNAL
HEX PRESSURE SCREW

REMOVABLE CAP
TO TIGHTEN SCREW
(REPLACE WHEN COMPLETE)





WIRE ENTRY PORT
WIRE RANGE: 750KCMIL - 1/0
PRE-FILLED W/ OXIDE INHIBITOR

IPLDS750-10 SHOWN

NSI PART NUMBER	UL PART NUMBER	NO. OF PORTS	LENGTH
IPLDS750-4	N-IS4G	4	3.55
IPLDS750-6	N-IS6G	6	4.95
IPLDS750-8	N-IS8G	8	6.38
IPLDS750-10	N-IS10G	10	7.80
IPLDS750-12	N-IS12G	12	9.23
IPLDS750-14	N-IS14G	14	10.66
IPLDS750-16	N-IS16G	16	12.09
IPLDS750-18	N-IS18G	18	13.51
IPLDS750-20	N-IS20G	20	14.94
IPLDS750-22	N-IS22G	22	16.37
IPLDS750-24	N-IS24G	24	17.80

NOTES:
1. CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
2. UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
3. DUAL RATED FOR 75°C COPPER AND/OR ALUMINUM CONDUCTOR.
4. COLD TEMPERATURE RATED TO -45°C.
5. HIGH DIELECTRIC STRENGTH INSULATION IS ABRASION AND CHEMICAL RESISTANT
6. UV RATED

CONTACT NSi FOR SALES @ 800.321.5847

POLARIS SALES . CO . INC

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLARIS SALES CO. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLARIS SALES CO. INC. IS PROHIBITED.

11625 PROSPEROUS DRIVE ODESSA, FL 33556

TITLE: INSULATED STACKED DUAL ENTRY (BOTTOM ROW) 750 CONNECTOR

	NAME	DATE
DRAWN BY	S.PARRY	06/2012

DWG. NO. IPLDS750-

MATERIAL: N/A

SCALE: *N/A*

SHEET: 1 OF 1