


© 2025 TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-19-006038	14MAY2019	BS	CW
	C	ECR-21-117384	15NOV2021	WQR	CW
	C1	ECR-22-161571	03JAN2023	WQR	CW
	D	ECR-25-237972	16JUN2025	ABS	RB





SCALE 1:1

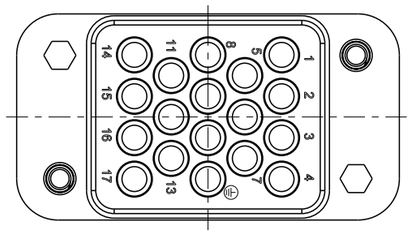

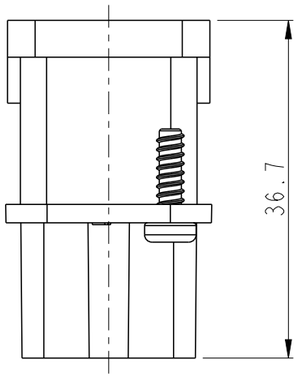


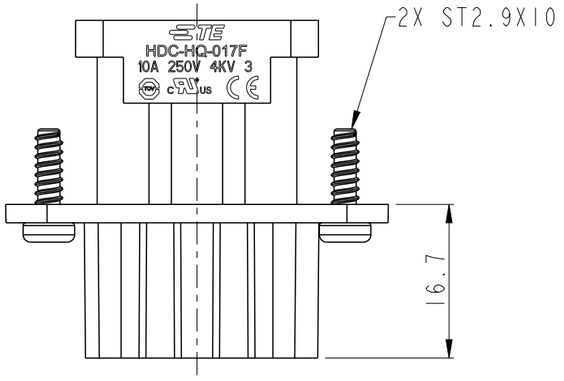

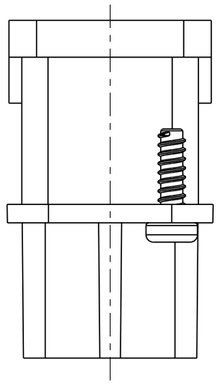



SCALE 1:1

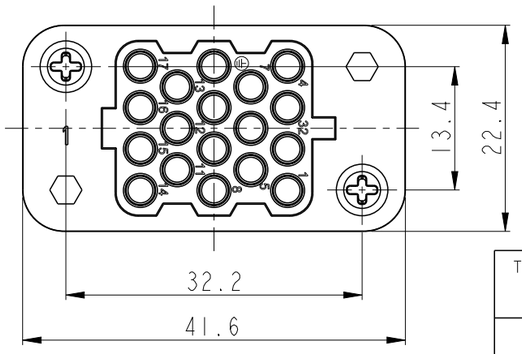

NOTES:

1. TECHNICAL CHARACTERISTICS:
   INSULATION MATERIAL: PC (GRAY)
   RATED VOLTAGE: 250V
   RATED CURRENT: 10A
   INSULATION RESISTANCE: >=400MΩ
   RATED IMPULSE VOLTAGE: 4KV
   POLLUTION DEGREE: 3
   FLAMMABILITY: UL94V-0
   MATING CYCLES: 500 CYCLES
   WIRE RANGE: 0.14mm²~2.5mm² (AWG26-AWG14)
   CONTACT TYPE: CRIMP CONTACT

2. CONTACT NEED TO BE ORDERED SEPARATELY.
   (ORDER NO. REFER TO DRAWING: T20200X20XX000.)

注释:

1. 技术参数:
   绝缘材料: PC (GRAY)
   额定电压: 250V
   额定电流: 10A
   绝缘电阻: >=400MΩ
   脉冲电压: 4KV
   污染等级: 3
   阻燃等级: UL94V-0
   插拔次数: 500次
   接线范围: 0.14mm²~2.5mm² (AWG26-AWG14)
   接线类型: 冷压接

2. 端子需要单独订购.
   (订购单号参考图面:T20200X20XX000.)

T2080172201-000	HQ-017-F	HQ-017 FEMALE INSERT HQ-017母插
PART NUMBER 料号	PART DESCRIPTION 描述	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-
MATERIAL - -	FINISH - -

DWN	CHARLIE.HU 13OCT2016
CHK	KYLE.ZENG 13OCT2016
APVD	CHRIS.WANG 13OCT2016
PRODUCT SPEC	108-137116
APPLICATION SPEC	114-137116
WEIGHT	-

TE Connectivity

NAME HQ-017-F

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	C-T2080172201000	-

CUSTOMER DRAWING

SCALE	SHEET	REV
3:2	1 OF 1	D