




© 2025 TE Connectivity. All Rights Reserved.






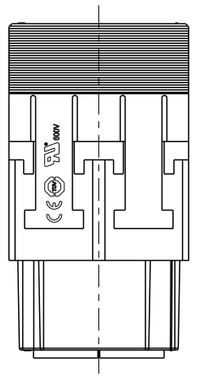

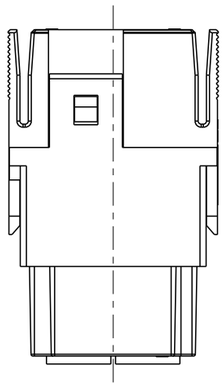

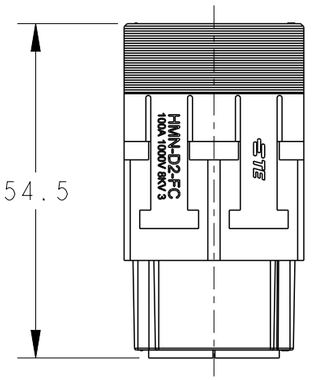



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	18MAR2015	DW	CW
	B	ECR-15-018270	07DEC2015	DW	CW
	C	ECR-21-111798	23SEP2021	WQR	CW
	D	ECR-25-237961	17MAR2025	ABS	RB

NOTES:
1. TECHNICAL CHARACTERISTICS:
   INSULATION MATERIAL: PC
   RATED VOLTAGE: 1000V
   RATED CURRENT: 100A
   INSULATION RESISTANCE: >=400MΩ
   RATED IMPULSE VOLTAGE: 8KV
   POLLUTION DEGREE: 3
   FLAMMABILITY: UL94V-0
   MATING CYCLES: 500 CYCLES
   OPERATION TEMPERATURE: -40°C~+125°C
   WIRE RANGE: 10.0mm²~35.0mm²
   CONTACT TYPE: CRIMP CONTACT
2. CONTACT NEED TO BE ORDERED SEPARATELY.
   (ORDER No. REFER TO DRAWING:T20500020XX000)

注释：
1. 技术参数：
   绝缘材料： PC
   额定电压： 1000V
   额定电流： 100A
   绝缘电阻： >=400MΩ
   脉冲电压： 8KV
   污染等级： 3
   阻燃等级： UL94V-0
   插拔次数： 500次
   工作温度： -40°C~+125°C
   接线范围： 10.0mm²~35.0mm²
   接线类型： 冷压接
2. 端子需要单独订购，
   （订货号参考图面： T20500020XX000）

HMN-D2-FC	T2111028201-000
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL -
-

FINISH -
-

DWN David Wang 18MAR2015
CHK Chris.Wang 18MAR2015
APVD Xiang.Xu 18MAR2015
PRODUCT SPEC 108-137058
APPLICATION SPEC 114-137058
WEIGHT -

TE Connectivity

NAME HMN-D2-FC

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-T2111028201000	-

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV D