


© 2025 TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-15-013292	24SEP2015	DL	CW
	C	ECR-21-105887	26JUL2021	BS	CW
	D	ECR-22-150866	27SEP2022	DL	CW
	E	ECR-25-237606	29MAY2025	ABS	RB

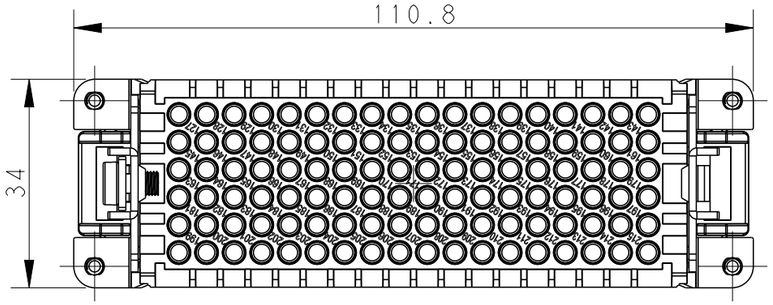

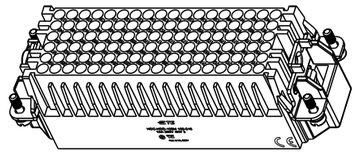

SCALE 1:2

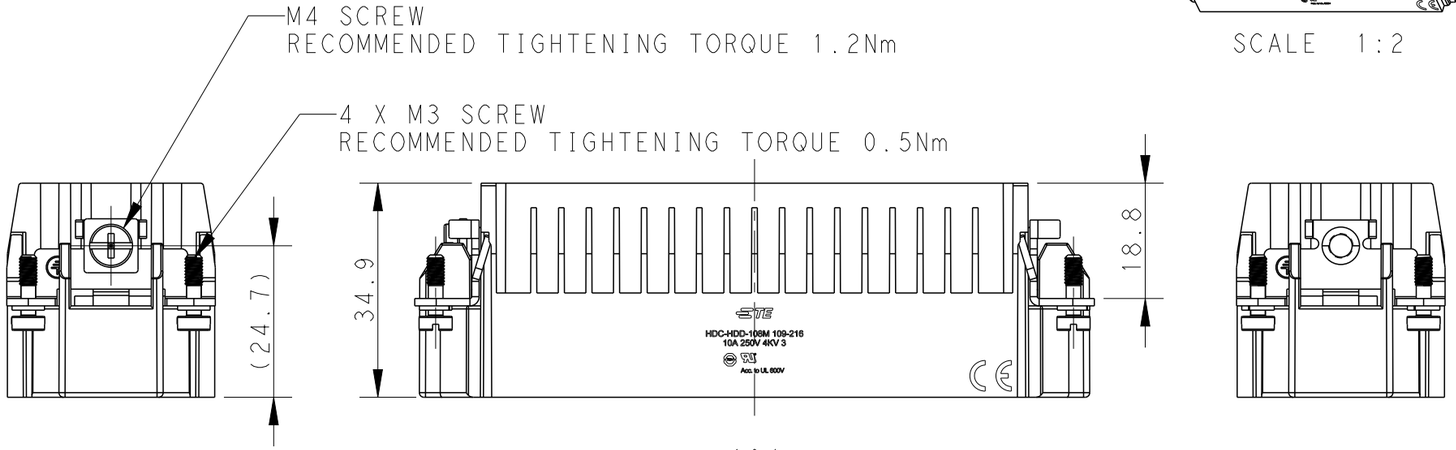

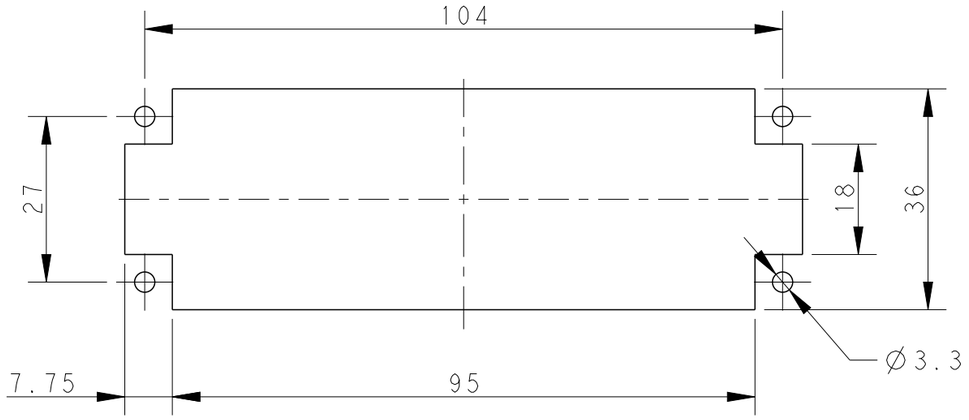

PANEL CUT OUT FOR INSERTS FOR USING WITHOUT HOODS/HOUSINGS

NOTES:
1. TECHNICAL CHARACTERISTICS:
   INSULATION MATERIAL: PC
   RATED VOLTAGE: 250 V
   RATED CURRENT: 10 A
   INSULATION RESISTANCE: >=400MΩ
   RATED IMPULSE VOLTAGE: 4 KV
   POLLUTION DEGREE: 3
   FLAMMABILITY: UL94V-0
   MATING CYCLES: 500 CYCLES
   WIRE RANGE: 0.14-2.5 mm² (26-14 AWG)
   CONTACT TYPE: CRIMP CONTACT
2. CONTACT NEED TO BE ORDERED SEPARATELY.
   (ORDER No. REFER TO DRAWING:T20200X10XX000)

注释：
1. 技术参数：
   绝缘材料： PC
   额定电压： 250V
   额定电流： 10A
   绝缘电阻： >=400MΩ
   额定脉冲电压： 4 KV
   污染等级： 3
   阻燃等级： UL94V-0
   插拔次数： 500次
   接线范围： 0.14-2.5 mm² (26-14 AWG)
   接线类型： 冷压接
2. 端子需要单独订购，
   （订货号参考图面： T20200X10XX000）

HDC-HDD-108M 109-216	T2032162101-000
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL -
-

FINISH -
-

DWN DAVID LI 18MAR2015
CHK CHRIS WANG 18MAR2015
APVD XU XIANG 18MAR2015
PRODUCT SPEC 108-137043
APPLICATION SPEC 114-137043
WEIGHT -

TE Connectivity

NAME HDC-HDD-108M 109-216

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	C-T2032162101000	-

CUSTOMER DRAWING

SCALE	SHEET	REV
1:1	1 OF 1	E