
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

MATERIAL	HIGH CONDUCTIVITY SEAMLESS COPPER TUBE
PLATING	ELECTRO-TIN
WIRE SIZE	6 AWG
WIRE TYPE	STRANDED COPPER; CLASS B: COMPACT, COMPRESSED OR CONCENTRIC, CLASS C: CONCENTRIC
WIRE STRIP LENGTH	7/8 IN.
STUD SIZE	1/4 IN.
UL LISTED WIRE CONNECTOR	YES, FOR APPLICATIONS UP TO 35KV. CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS WITH APPLICATIONS GREATER THAN 2000 VOLTS.
UL TEMPERATURE RATING	90° C
CSA CERTIFIED WIRE CONNECTOR	YES
PANDUIT COLOR CODE ON BARREL	BLUE
PANDUIT DIE INDEX NO. ON BARREL	P24
ALTERNATE INDUSTRY DIE INDEX NO. () ON BARREL	(7)

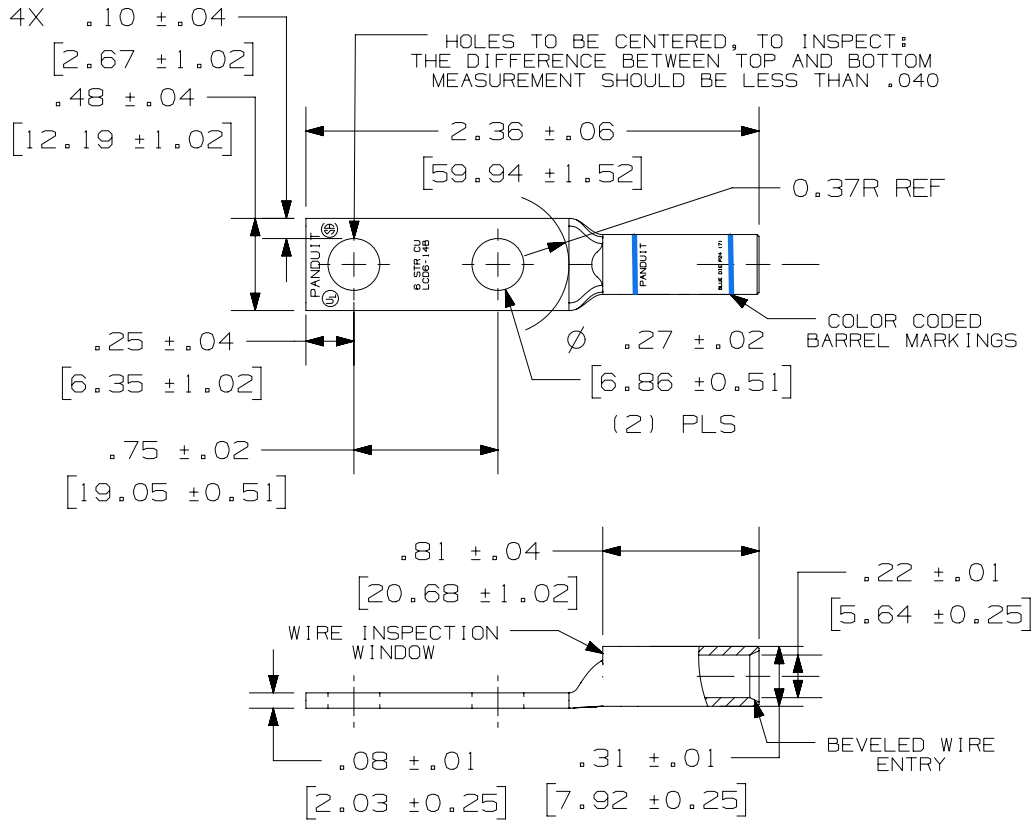

DIMENSIONS IN BRACKETS ARE MILLIMETERS

LISTED
WIRE CONNECTOR

CERTIFIED

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03	5-11-26	ANVM	ANVM	JSUN	CONVERTED TO NX ADDED HOLE POSITION DIMENSION ADDED HOLE NOTE	038923/00
02	9-23	JHNU	JHNU	MRWA	A. NAVY NUMBER REMOVAL DRAWING CHANGE DATE:7-12	135035
01	7-12	JHNU	JHNU		REMOVED NAVY NUMBER	N10884SA

PART NUMBER: LCD6-14B-L

TITLE: COPPER LUG -TWO HOLE, STANDARD BARREL

CUSTOMER DRAWING

ITEM REVISION NAME: N10884SA/03

DATASET FILE NAME: N10884SA-DC r03A

THIRD ANGLE PROJECTION

MATERIAL: SEE TABLE

DRAWING NUMBER: N10884SA-DC

DRAWN BY	DATE	CHK	SCALE	SIZE
ANVM	5-11-26	JSUN	NONE	A

SHEET 1 OF 1

A_SIZE_CUSTOMER_LAND