

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| | |
|---|---|
| MATERIAL | HIGH CONDUCTIVITY SEAMLESS COPPER TUBE |
| PLATING | ELECTRO-TIN |
| WIRE SIZE | 6 AWG |
| WIRE TYPE | STRANDED COPPER; CLASS B: COMPACT, COMPRESSED OR CONCENTRIC, CLASS C: CONCENTRIC |
| WIRE STRIP LENGTH | 7/8 IN |
| STUD SIZE | 1/4 IN. |
| UL LISTED WIRE CONNECTOR | YES, FOR APPLICATIONS UP TO 35KV. CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS WITH APPLICATIONS GREATER THAN 2000 VOLTS. |
| UL TEMPERATURE RATING | 90° C |
| CSA CERTIFIED WIRE CONNECTOR | YES |
| PANDUIT COLOR CODE ON BARREL | BLUE |
| PANDUIT DIE INDEX NO. ON BARREL | P24 |
| ALTERNATE INDUSTRY DIE INDEX NO. () ON BARREL | (7) |

DIMENSIONS IN BRACKETS ARE MILLIMETERS

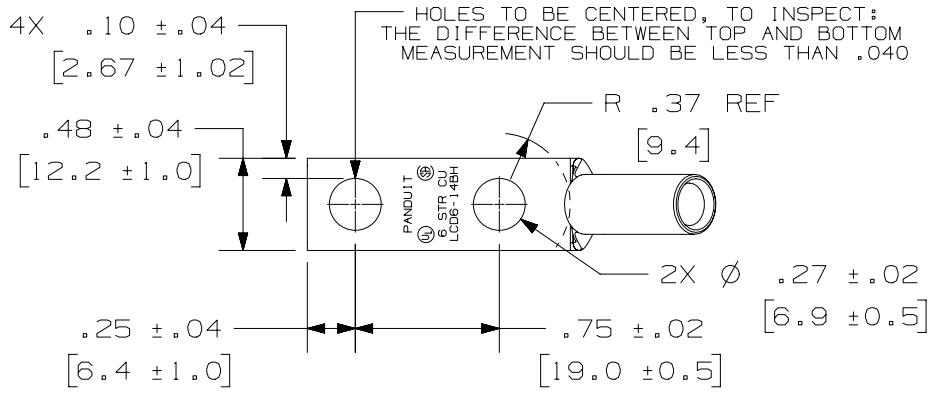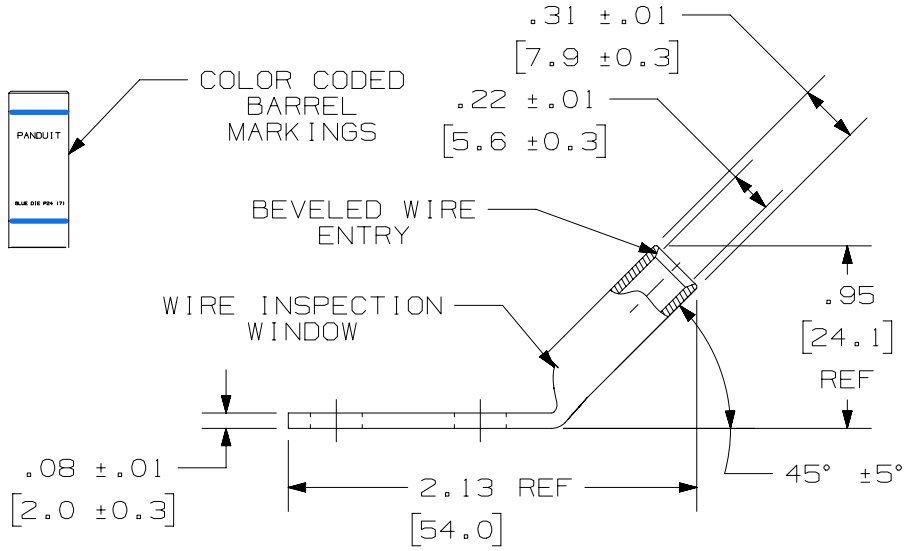


LISTED
WIRE CONNECTOR

CERTIFIED

| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|---|---|---|---|---|---|---|
| 04A | 5-14-26 | ANVM | ANVM | JSUN | ADDED HOLE POSITION DIMENSION<br>ADDED HOLE POSITION NOTE FOR INSPECTION | 038923/00 |
| 03B | 10-30-24 | JHNU | JHNU | MRWA | D. REMOVED TONGUE LENGTH DIMENSION | 007987 |
| 03A | 8-23-24 | JHNU | JHNU | MRWA | C. ADDED TONGUE LENGTH DIMENSION<br>B. REVISED DRAWING NUMBER: N10884VP-DC WAS LCD6-14BH-CUST<br>A. CONVERTED TO NX | 005809 |

A-SIZE CUSTOMER

PART NUMBER: LCD6-14BH-L

TITLE: COPPER LUG - TWO HOLE STANDARD BARREL 45° ANGLE TONGUE

CUSTOMER DRAWING

ITEM REVISION NAME: N10884VP/04

DATASET FILE NAME: N10884VP-DC r04A

THIRD ANGLE PROJECTION

MATERIAL: SEE TABLE

DRAWING NUMBER: N10884VP-DC

| DRAWN BY | DATE | CHK | SCALE | SHEET | SIZE |
|---|---|---|---|---|---|
| JHNU | 9-23 | JHNU | NONE | SHEET 1 OF 1 | A |