METAL UNICLIP BRACKETS FOR USE WITH STRUT, TOP HAT, I-BEAM & ROUND LADDER RUNG SYSTEMS


Part Number(s): UCSQ1-V316, UCSQ1-VC, UCSQ2-V316, UCSQ2-VC, UCTH1-V316, UCTH1-VC, UCIB1-V316, UCIB1-VC, UCIB2-V316, UCIB2-VC, UCRND1-V316 & UCRND1-VC

© Panduit Corp. 2026


INSTALLATION INSTRUCTIONS


RW309 (10/2026)


STRUT -TYPE

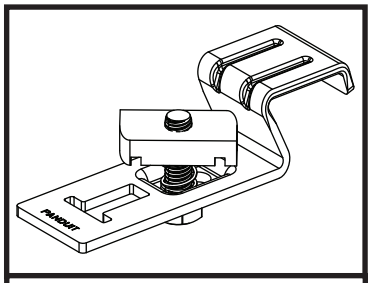



UCSQ1-V316, UCSQ1-VC
UCSQ2-V316, UCSQ2-VC

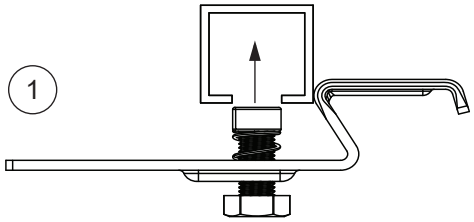

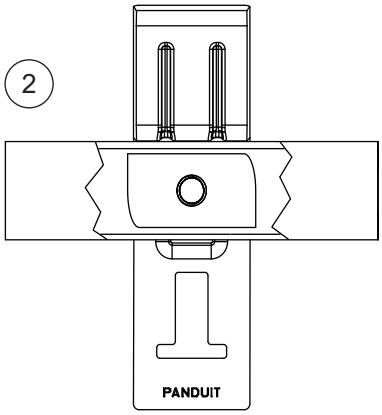

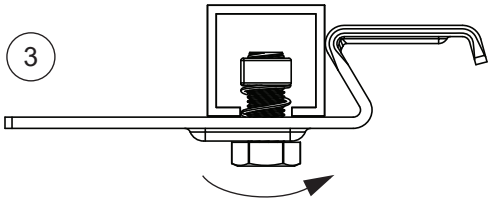


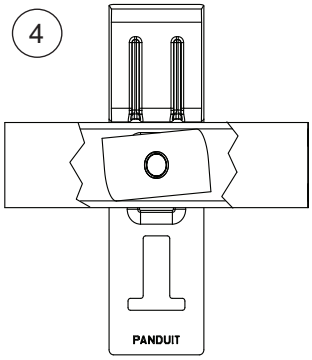


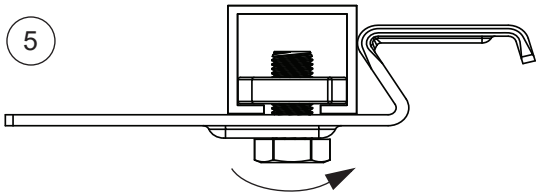


212 lbs-in [24 N.m]

NOTE: ENSURE PROPER CHANNEL NUT ALIGNMENT

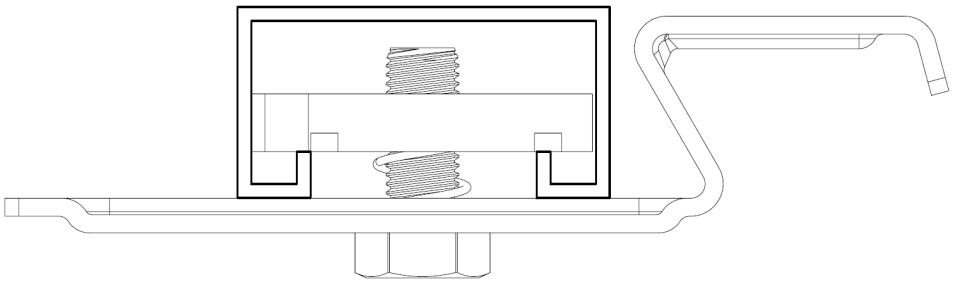


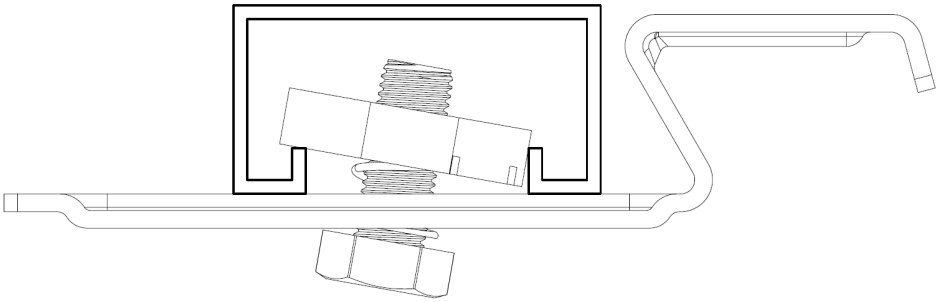


TOP HAT

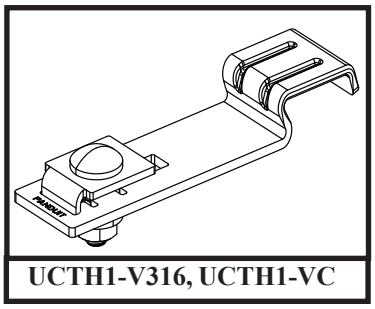


UCTH1-V316, UCTH1-VC




"X"
2.27"-2.60" [57.7-66mm]
1.91"-2.26" [48.5-57mm]
1.50"-1.90" [38-48mm]

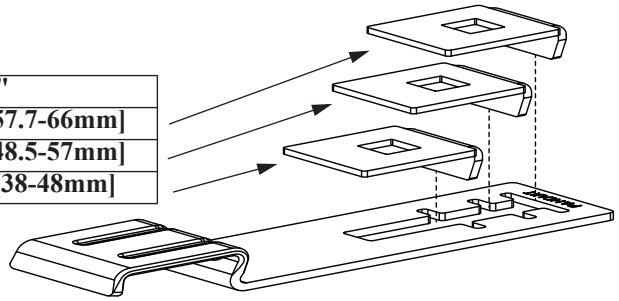

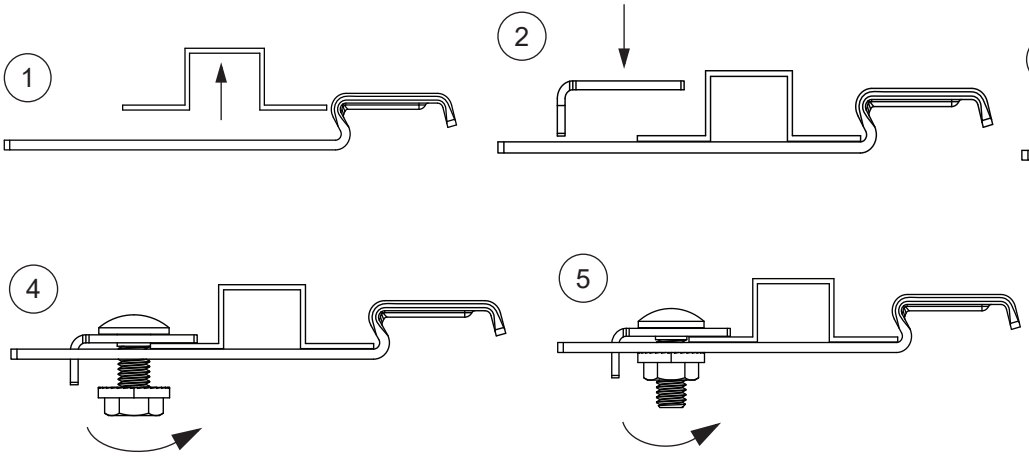


212 lbs-in [24 N.m]


ROUND RUNG

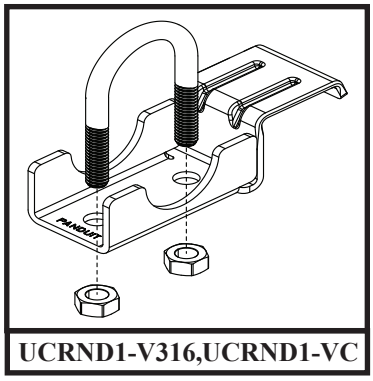

UCRND1-V316,UCRND1-VC

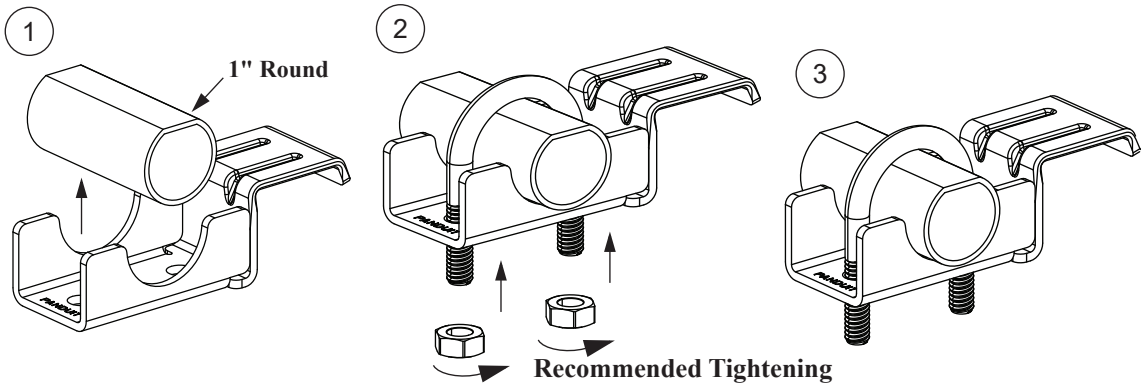


Recommended Tightening
25 lbs-in [2.8 N.m] each nut

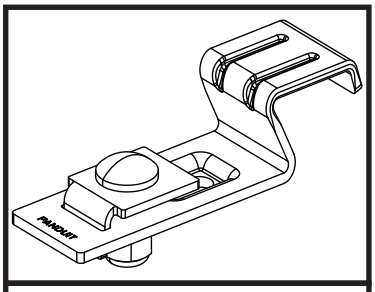

UCIB1-V316, UCIB1-VC
UCIB2-V316, UCIB2-VC

I-BEAM

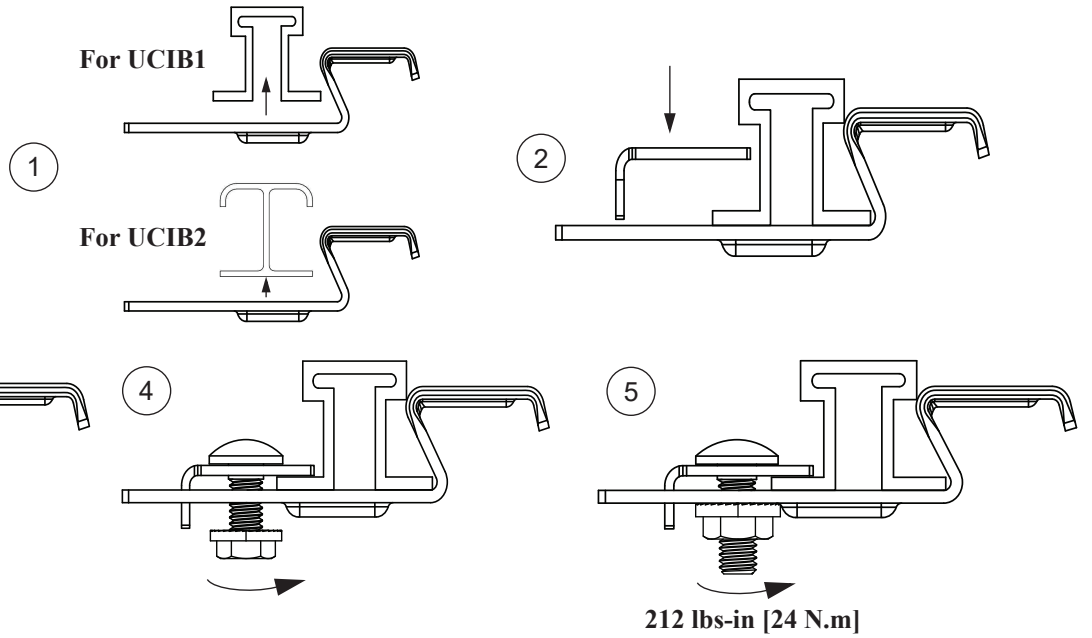

Typical installation of the cushion sleeve and tie strap:

1. Wrap cushion sleeve around cabling

2. Install tie strap over the cushion sleeve/cabling and around the bracket

