



未注公差/General tolerances(mm)														
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°


使用温度范围/Operating temperature(℃)	-40~+105
符合 RoHS 环保要求/Conform to RoHS	Yes
阻燃等级/Flame class	UL94V-0

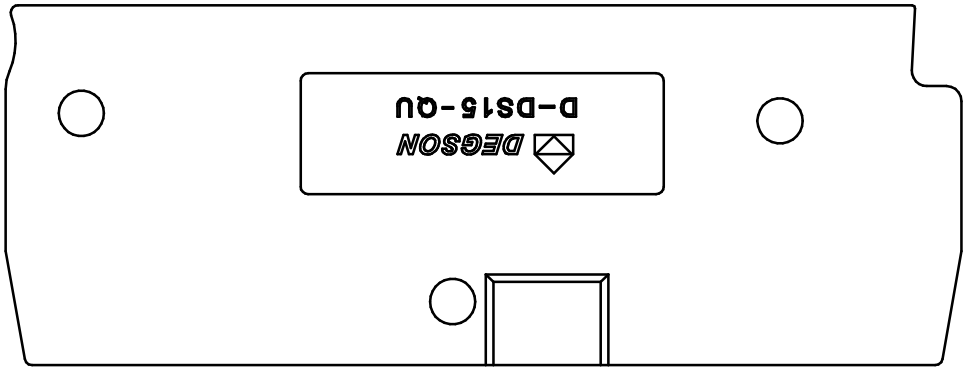





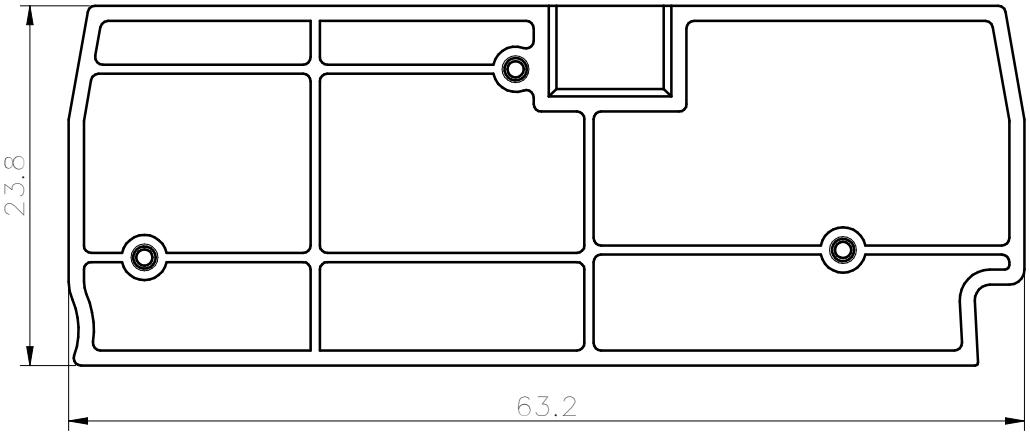

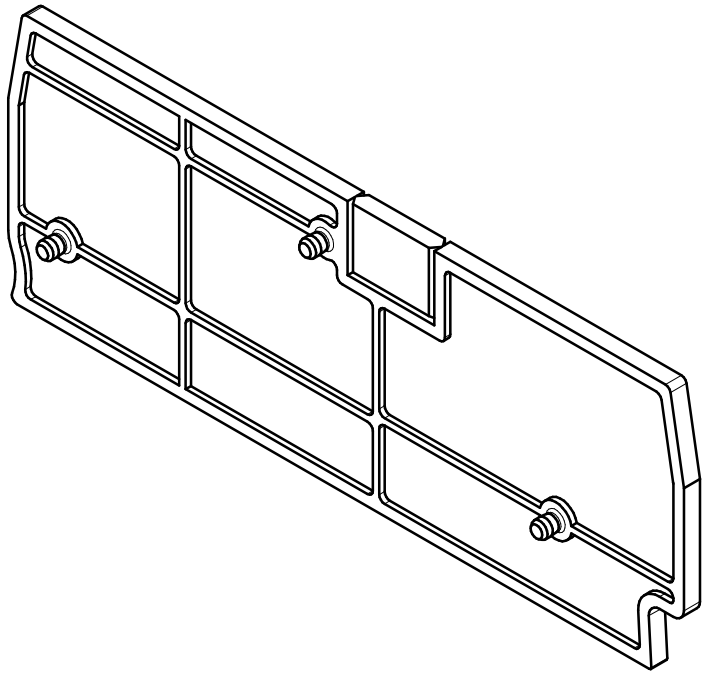

00		19-0097 轨道盖板工艺修改	黄顺	2021.07.28	
REV	ECN	DESCRIPTION	DRFT	DATE	

DEGSON

APPD:	李根劳	2021.07.28
CHKD:	马恩开	2021.07.28
DRFT:	黄顺	2021.07.28

A4 (mm) (inch)

MATERIAL:		SURFACE:	
MAT NO./REV:	/ 00	MAT STATUS: 批量	
NAME	D-DS1.5-QU-01P-1Y-00A&Z(H)		
DRAWING NO.	TYPE	DRAWING STATUS	SCALE / SHEET
200005743	CUSTOMER DRAWING	已发布	2:1 / 1/1

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 非经予明确授权，否则禁止转让、复制、利用、交流本文件的内容，侵犯者将负赔偿责任。本公司保留对涉及发明、实用新型和外观专利的所有权利。