

| 未注公差/General tolerances(mm) | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0~3 | >3~6 | >6~10 | >10~18 | >18~30 | >30~50 | >50~80 | >80~120 | >120~180 | >180~250 | >250~315 | >315~400 | >400~500 | >500 | 0.1/10 |
| ±0.12 | ±0.18 | ±0.22 | ±0.26 | ±0.31 | ±0.37 | ±0.57 | ±0.80 | ±0.93 | ±1.05 | ±1.15 | ±1.60 | ±2.20 | ±2.50 | ±2° |

I
2:1


II
2:1




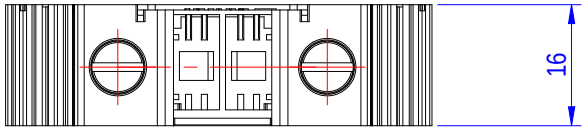

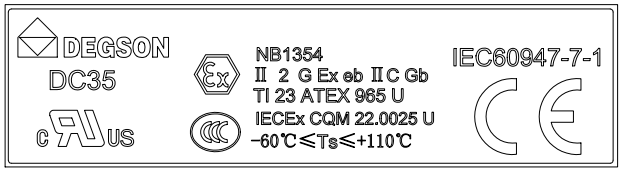

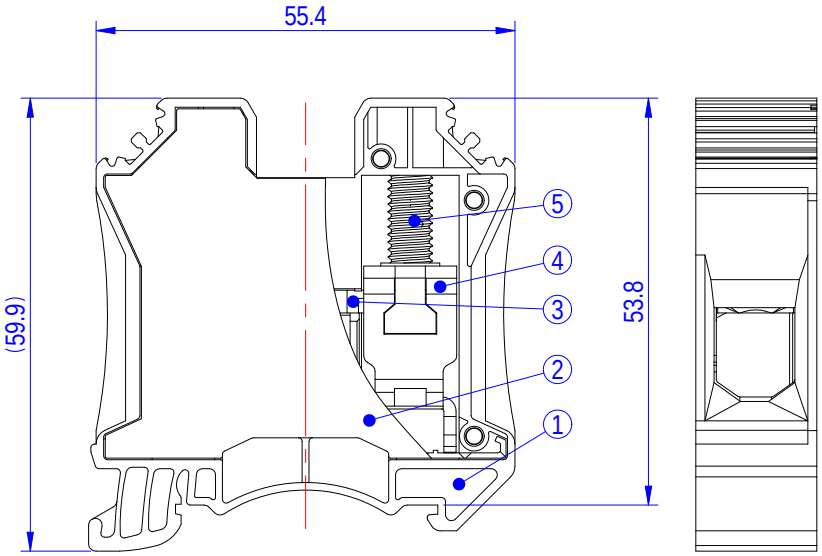


| ITEM | NAME OF PART | MATERIAL | NOTES |
|---|---|---|---|
| 5 | Screw | Stell | Zn Plated |
| 4 | Cage | Stell | Zn Plated |
| 3 | Current carrier | Copper | Sn Plated |
| 2 | Cover | PA66 | UL94 V-0 |
| 1 | Housing | PA66 | UL94 V-0 |
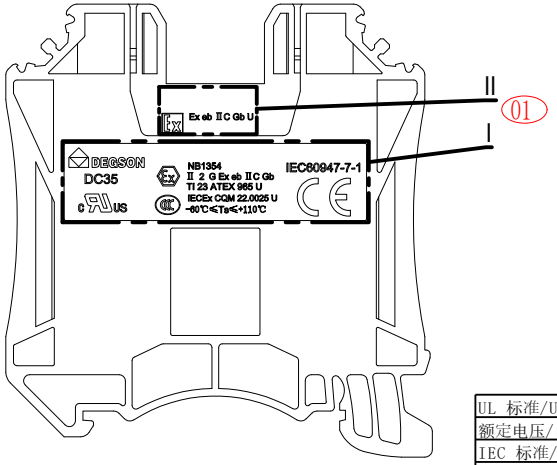
| UL 标准/UL Standard: | B | C | D |
|---|---|---|---|
| 额定电压/电流/Rated Voltage(V)/Current(A) | 600/150 | 600/150 | 600/5 |
| IEC 标准/IEC Standard: | | | |
| 过压类别/Overvoltage Category/污染等级/Pollution Degree | Ⅲ/3 | Ⅲ/2 | II/2 |
| 额定电压/电流/Rated | 1000/125 | / | / |
| 额定脉冲电压(KV)/Rate Impulse | 8 | / | / |
| 螺丝扭矩/Torque Tightening(N· m/Lb.in) | M6, 3.5/31.01 | | |
| 线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²) | 14～1/0/1.5～50 | | |
| 间距/Pitch(mm)/线数范围/Poles | 16/N=01P | | |
| 剥线长度/Stripping length(mm) | 14～16 | | |
| 使用温度范围/Operating temperature(° C) | -40～+105 | | |
| 符合RoHS环保要求/Conform to RoHS | Yes | | |

| 图纸版本 | ECN | 变更描述 | 设计人 | 设计日期 |
|---|---|---|---|---|
| REV | ECN | DESCRIPTION | DRFT | DATE |

DEGSON

| | | |
|---|---|---|
| APPD: | 核准人 | 核准日期 |
| CHKD: | 审核人 | 审核日期 |
| DRFT: | 设计人 | 设计日期 |

A4 mm (inch)

MATERIAL: 材质 | SURFACE/COLOR: 表面处理

MAT NO./REV: 物料编码 / 版本 | MAT STATUS: 物料状态

NAME: DC35-01P-1Y-00Z(H)

| DRAWING NO. | TYPE | DRAWING STATUS | SCALE | SHEET |
|---|---|---|---|---|
| 图号 | 图纸类型 | 图纸状态 | 1:1 | 1/1 |

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非经书面确认，否则禁止将此文档及其内容进行传递、复制、利用、交流。违反者将为赔偿责任。本公司保留对涉及发明、实用新型和外观专利的所有权利。