


未注公差/General tolerances(mm)														
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2°



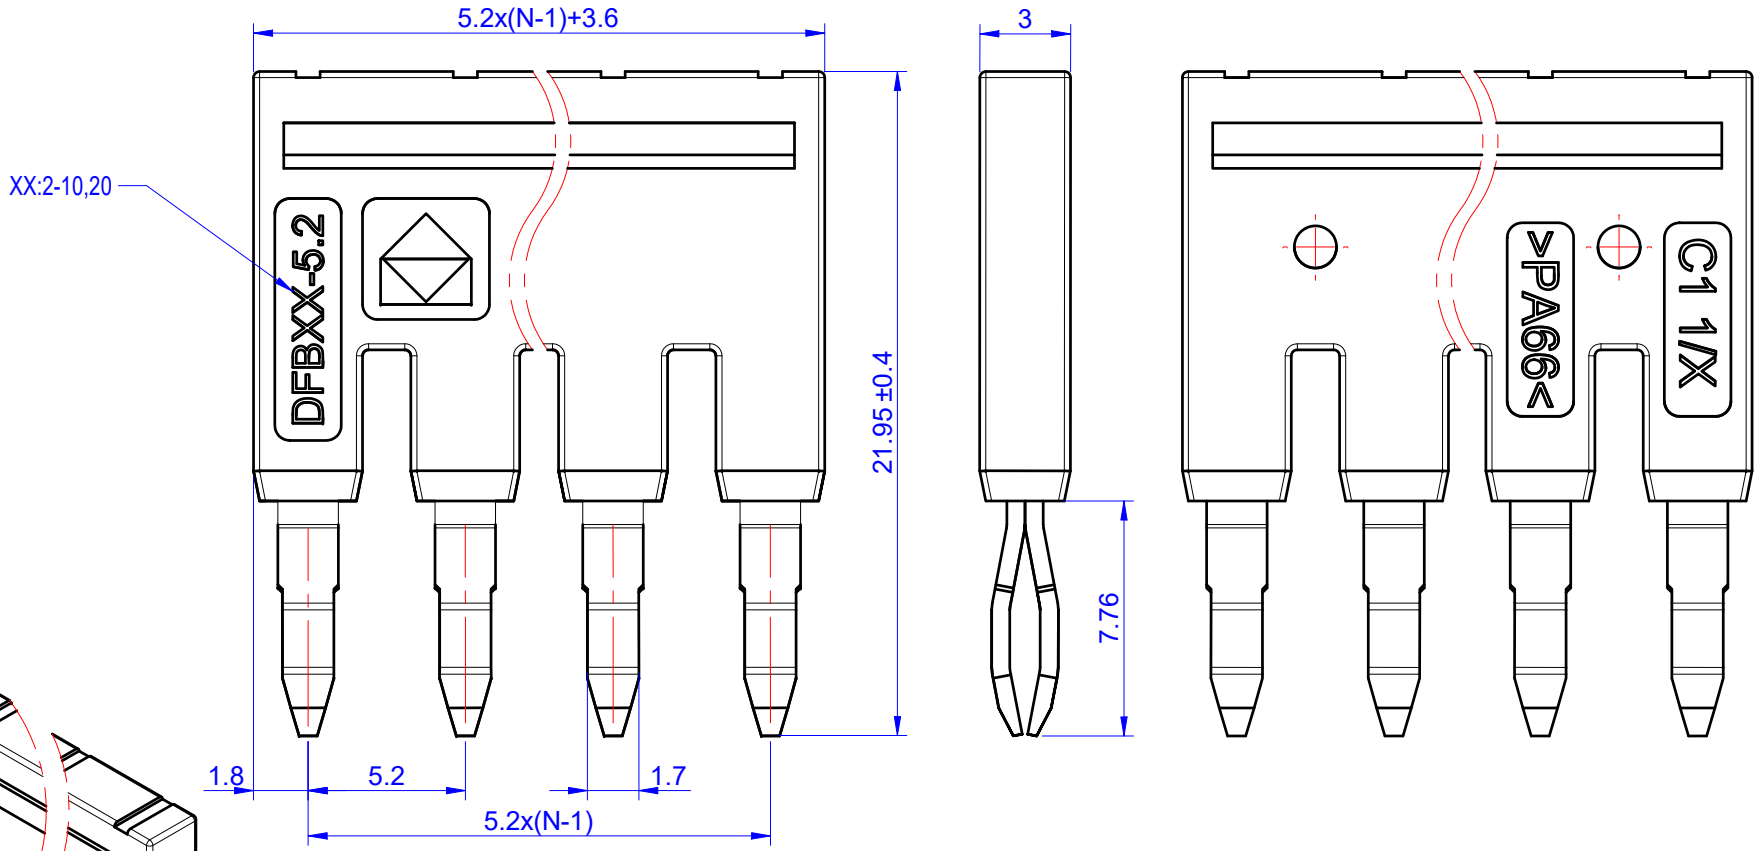

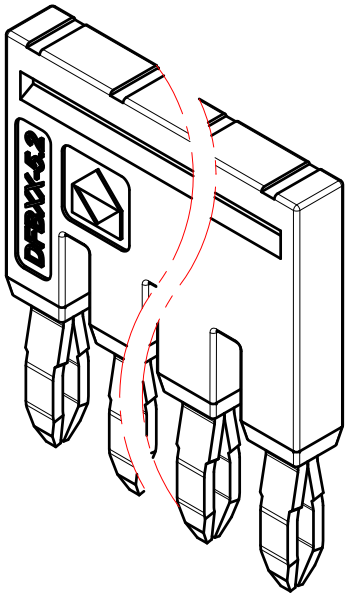

ITEM	NAME OF PART	MATERIAL	NOTES
2	Current_carrier	Copper	Sn Plated
1	Housing	PA66	UL94V-0

间距/ Pitch(mm)/ 线数范围/ Poles	5.2/ N=2~10P,20P
使用温度范围/ Operating temperature(℃)	- 40~+105
符合 RoHS环保要求/ Conform to RoHS	Yes

REV	ECN	DESCRIPTION	DRFT	DATE
00	/	NEW DRAWING	霍思榕	2023.07.31

DEGSON

APPD:	李根劳	2023.07.31
CHKD:	马恩开	2023.07.31
DRFT:	霍思榕	2023.07.31

A4 mm (inch)

MATERIAL: SURFACE/COLOR:

MAT NO./REV: / / 00 MAT STATUS: 批量

NAME: DFBXX-5.2-1Y-00Z(H)

DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200112597	CUSTOMER DRAWING	已发布	4:1	1/1

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容，侵犯者将负赔偿责任。本公司保留对涉及发明、实用新型和外观专利的所有权利。