


# VM Flat Transparent Screw Cover with Knockouts Type 4X, 5.03x5.03x4.02, Lt Gray, Polyester, CTK

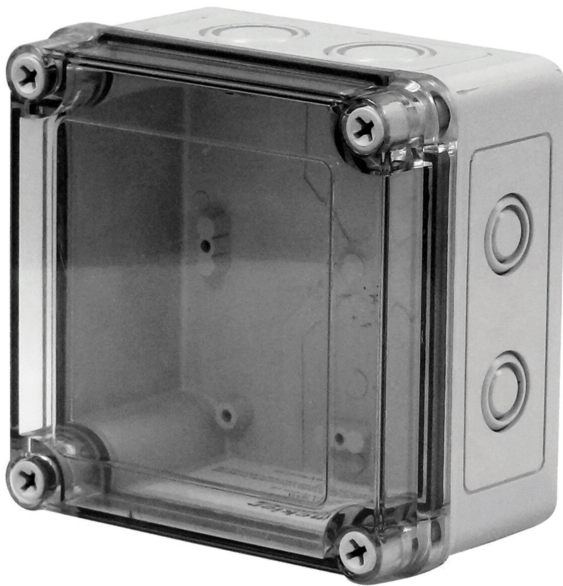

## CATALOG NUMBER

**VM554CTK**

The VM Series enclosure is designed for use as insulated electrical junction boxes, terminal wiring boxes, instrument housings and electrical control boxes in wet, dusty and corrosive environments.

## INDUSTRY STANDARDS

UL 508A Listed; Type 3, 3R, 4, 4X, 12, 13; File No. E192121  
cUL Listed per CSA C22.2 No 94; Type 3, 3R, 4, 4X, 12, 13; File No. E192121

Enclosure flammability per UL 508A

NEMA/EEMAC Type 3, 3R, 4, 4X, 12, 13

IEC 60529, IP66

Meets NEMA Type 3RX requirements

## FEATURES

Enclosures are maintenance free and corrosion resistant

Bases and covers are made from a polyester, polycarbonate material blend that can withstand continuous temperatures up to 280°F (138°C)

Transparent covers are made from polycarbonate that withstands continuous temperatures from -13°F to +104°F (-25°C to +40°C)

Cover screw holes in corners are outside of the gasketed area

Knockouts in the base facilitate conduit entry

Continuous gaskets made of polyurethane foam ensure optimal integrity

Transparent cover with four non-metallic corner screws and knockouts in the base

## PRODUCT ATTRIBUTES

---

Article Number: VM554CTK

Height: 5.03in

Width: 5.03in

Depth: 4.02in

Material: Polyester

Finish: Smooth Matte

Color: Light Gray

Color Code: RAL 7035

Weight: 0.48lb

## WARNING

---

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at [www.nvent.com](http://www.nvent.com) and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.



Our powerful portfolio of brands:

**CADDY**

**ERICO**

**HOFFMAN**

**ILSCO**

**SCHROFF**

**TRACHTE**