We connect and protect

Terminal Box, SSTB, 300x400x120mm, Brushed, Stainless 304

CATALOG NUMBER

SSTB304012

The stainless steel terminal box range, SSTB, with a IP 66 protection degree, is available off the shelf in many different sizes. The SSTB range is well suited for indoor and outdoor environments thanks to its corrosion resistance. Water and dust are prevented from entering the terminal box, thus eliminating the risk for component failure, and with that, unnecessary downtime.

INDUSTRY STANDARDS

UL 508A Listed; Type 4X, 12, 13; File No. E92044

cUL Listed per CSA C22.2 No.0, No.0.4, No.14, No.94; Type 4X 12, 13; File No. E92044

NEMA/EEMAC Type 4X, 12, 13

IEC 62208 IP66

CE, UK CA, UL

FEATURES

Material: AISI 304L pre-grained stainless steel / AISI 316L (on request). Body: 1 mm. Cover: 1.5 mm.

Body: Folded and seam welded. Four M6x13 studs for bottom profile / mounting plate fixation. For ease of installation, each back corner of the enclosure is laser-marked to precisely indicate where to drill holes and affix AWS wall mounting brackets.

Gasket: Sealing is ensured by an injected polyurethane gasket or by an injected silicone gasket.

Earthing: M8x18 mm earthing studs in body and cover, M8 nuts, earthing washers and earthing labels.

Protection: IP 66 | TYPE 4X, 12 | IK 08.

Finish: 400 pre-grained stainless steel.

Delivery: Body, cover, cover screws, fixing screws, cover plugs and earthing facilities.

PRODUCT ATTRIBUTES

Article Number: SSTB304012

Height (H): 11.81in

Width (W): 15.75in

Depth (D): 4.72in

Gasket Type: Polyurethane

Material: Stainless Steel 304

Finish: Brushed

Body Thickness: 18ga

Door Thickness: 16ga

Weight: 9.84lb

DIAGRAMS

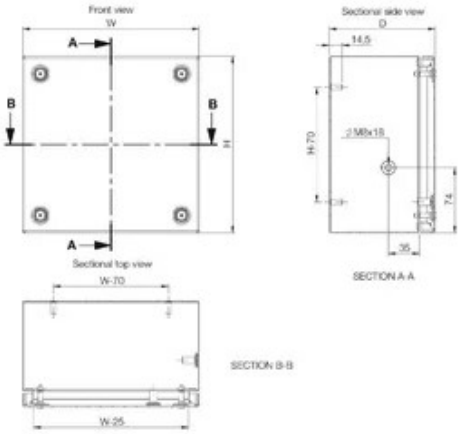

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

Our powerful portfolio of brands:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE

©2026 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without notice.

This document is system-generated.