

QRBUV

06.06.2024

Emergency-stop head


	General Data	
	Type reference:	QRBUV
	Description:	Emergency-stop head, foolproof
	Approvals:	CCC, cULus, TÜV_SÜD, CE, UKCA, UR
	Degree of protection:	IP65 / IP67 / IP69K
	Max. storage temperature:	-50°C ... 85°C
	Max. operating temperature:	-30°C ... 70°C
	Mechanical life:	50,000 switching cycles

Technical data	
Mounting aperture:	22.3 mm
Tightening torque (mounting nut):	max. 2.5 Nm
Release:	twist release, left or right
Mounting position:	any
Standards:	EN 60947-5-1, EN 60947-5-5, EN ISO 13850

Note	
- with switching position indicator - yellow anti-lock collar - foolproof acc. to EN ISO 13850	

Data acc. to UL508	
NEMA TYPE:	Type 1 (front face)

Dimensional drawing

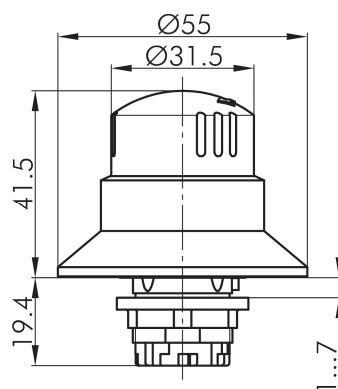

Drilling pattern

