



Model Number	GR3-AL-TF-56J-2-B-D-.33-208-230 460-60
MFG PN	T56 1/3U2B
List Price	--

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data		General Data	
Rated Motor Output Power	0.33 HP	Frame Size	56
Rated Motor Speed	3520 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	208-230 460-60 Volts - HZ	Approximate Weight	17
Rated Motor Current	1.36-1.24/0.62 Amps	NEMA Design	B
Service Factor	1.25	IP Rating	55
KVA Code	M	Insulation Class	F
Nominal Efficiency	72 %	Tropicalization	Yes
Nominal Power Factor	0.69 cos ϕ	Duty	cont
Full Load Torque Ft-Lb	0.552 Ft-Lb	Cable Entry	1.25
Temp Rise @ Full Load °C	26.3	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO



Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	
Locked Rotor	-	335	4.56	40	
Breakdown	-	417	-	Rated Altitude (M)	
Pull Up	-	276	-	1000	
125% of FL	3510	-	0.68	Coating	
75% of FL	3547	-	0.55	7058 - Graphite Grey	
50% of FL	3564	-	0.51	Shaft Grounding	
No Load	--	-	0.48	NO	
				Brake Voltage (DC)	
				0	
				Brake Torque (N-M)	
				0	

Hazardous Location	Class 1, Div 2, Grp A,B,C,D	Bearing NDE Side	6204ZZ
		Moment of Inertia	0 kg.m2
		Noise Level	Per NEMA dB (A)

CT VFD Range		--	Loaded Torque Curves	
			P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cos ϕ = Power Factor	

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A
Wiring Diagram	3PH 9 Lead Dual Voltage		

3 Phase - YY/Y - 9 Lead
 4,1 Blue / 5,2 White / 6,3 Org / 7 Yl / 8 Blk / 9 RD
 Cast Iron- 1,2,3 Top - 4,5,6,7,8,9 Bottom
 Aluminum - 4,5,6,8,9 Top - 1,2,3,7 Bottom

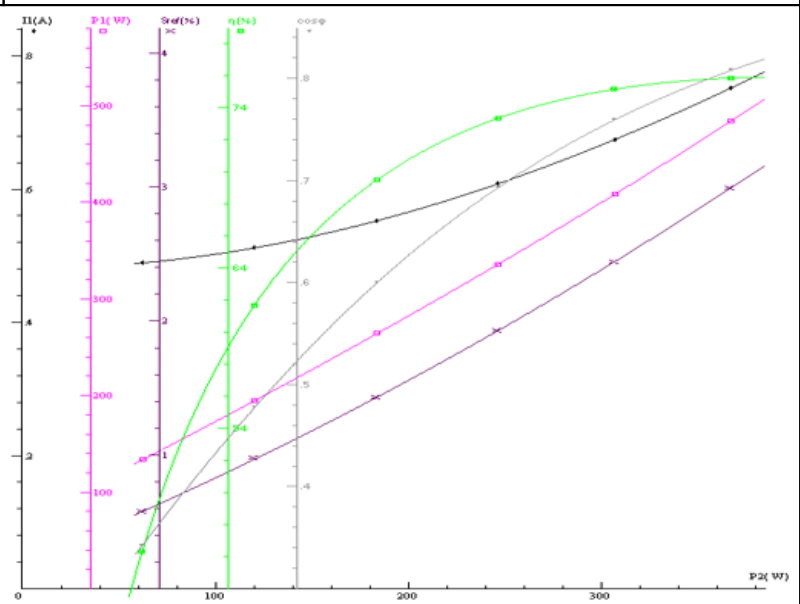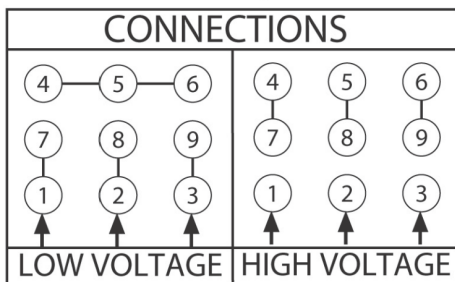

FRAME: 56J

HP:

RPM:

PHASE: 3

VOLT: 115/208-230V

ENCL: TEFC

FREQ: 60 Hz

FLA:

LRA:

