



Model NumberGR3-CI-TF-184T-4-B-D-5-230|460-60

MFG PNTFC184T5U4B

List Price--

All data shown at HIGH voltage setting

FormatSTD 3 Phase

Electrical Data

General Data

Rated Motor Output Power	5 HP
Rated Motor Speed	1750 r/min
Rated Motor Voltage (3 Phase)	230 460-60 Volts - HZ
Rated Motor Current	12.6/6.3 Amps
Service Factor	1.25
KVA Code	K
Nominal Efficiency	89.5 %
Nominal Power Factor	0.83 cos ϕ
Full Load Torque Ft-Lb	14.965904 Ft-Lb
Temp Rise @ Full Load °C	52.4
Efficiency Level	IE3 - NEMA Premium

Frame Size	184
Enclosure	TEFC
Approximate Weight	110
NEMA Design	A
IP Rating	55
Insulation Class	F
Tropicalization	YES
Duty	Cont.
Cable Entry	1.25
Feet Removable	YES
Double Drilled	NO

Load Data	RPM	Trq %FL	Current Amps
Locked Rotor	-	253	53
Breakdown	-	362	-
Pull Up	-	225	-
125% of FL	1734	-	7.5
75% of FL	1765	-	4.9
50% of FL	1777	-	3.92
No Load	1797	-	2.89

Rated Ambient (°C)	40
Rated Altitude (M)	1000
Coating	7024 - Graphite Grey
Shaft Grounding	NO
Brake Voltage (DC)	
Brake Torque (N-M)	

Mechanical Data

Bearing DE Side	6306 ZZ
Bearing NDE Side	6306 ZZ
Moment of Inertia	kg.m2
Noise Level	Per NEMA dB (A)

Hazardous Location	Class 1, Div 2, Grp A,B,C,D
--------------------	-----------------------------

Loaded Torque Curves

--

CT VFD Range

--

P_1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), $\cos\phi$ = Power Factor

CertificationsULCSADOE

File Numbers323353224693096A

Wiring Diagram3PH 9 Lead Dual Voltage



3 Phase - YY/Y - 9 Lead

4,1 Blue / 5,2 White / 6,3 Org / 7 Yl / 8 Blk / 9 RD

Cast Iron- 1,2,3 Top - 4,5,6,7,8,9 Bottom

Aluminum - 4,5,6,8,9 Top - 1,2,3,7 Bottom

CONNECTIONS

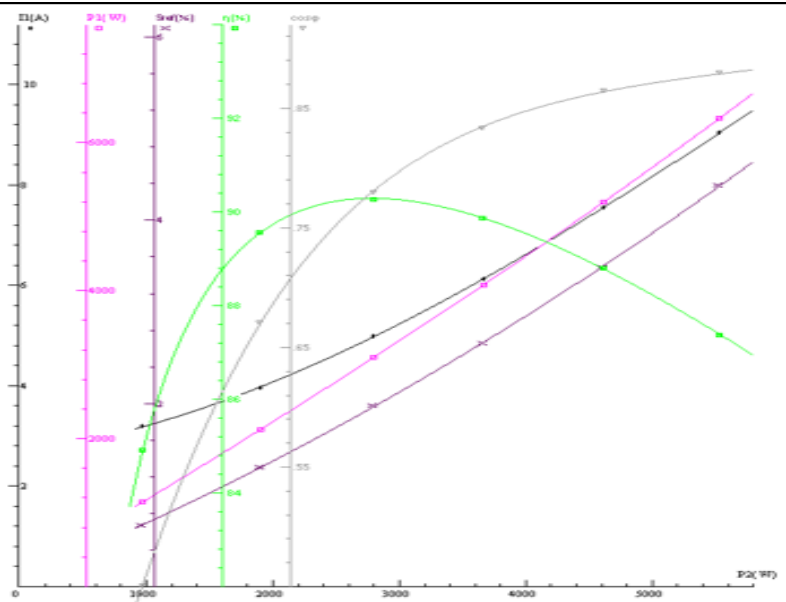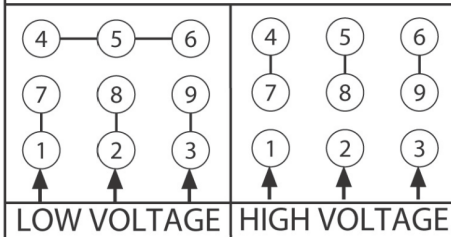

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

FRAME: 184T HP: RPM: PHASE: 3 VOLT: 208 - 230/460V ENCL: TEFC FREQ: 60 Hz FLA: LRA:

