
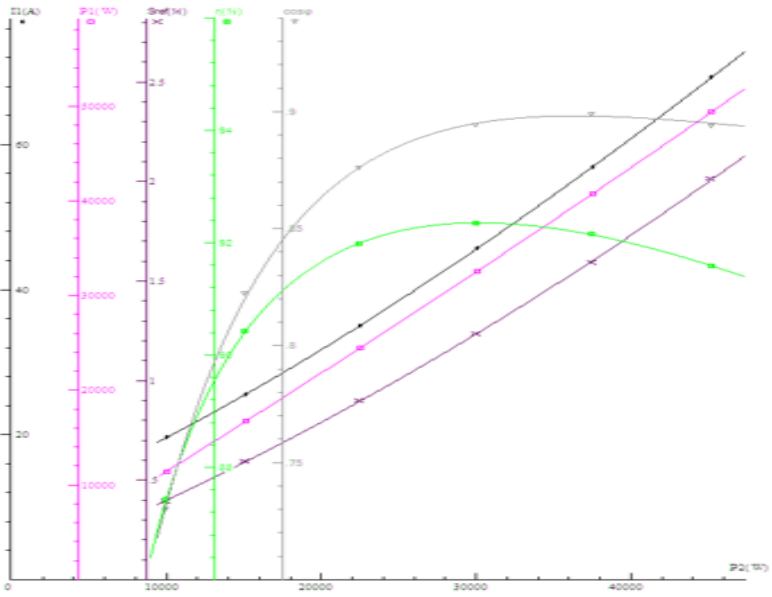



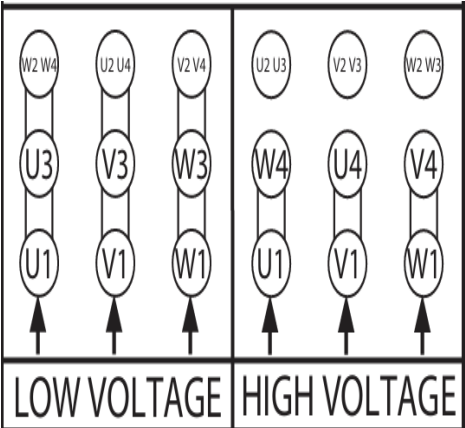


Model Number	GR3-CI-TF-200LB3-2-BR-D-40-230 460-60
MFG PN	T 200L1-2
List Price	--

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data				General Data	
Rated Motor Output Power		40 HP		Frame Size	200
Rated Motor Speed		3560 r/min		Enclosure	TEFC
Rated Motor Voltage (3 Phase)		230 460-60 Volts - HZ		Approximate Weight	543.4
Rated Motor Current		91.6/45.8 Amps		NEMA Design	A
Service Factor		1.15		IP Rating	55
KVA Code		H		Insulation Class	F
Nominal Efficiency		92.4 %		Tropicalization	YES
Nominal Power Factor		0.89 cosθ		Duty	Cont.
Full Load Torque Ft-Lb		59.7456 Ft-Lb		Cable Entry	M40 X 1.5
Temp Rise @ Full Load °C		65.8		Feet Removable	YES
Efficiency Level		IE3 - NEMA Premium		Double Drilled	NO
Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	235	344.4	Rated Altitude (M)	1000
Breakdown	-	289	-	Coating	7024 - Graphite Grey
Pull Up	-	--	-	Shaft Grounding	NO
125% of FL	3542	-	56.87	Brake Voltage (DC)	--
75% of FL	3568	-	35	Brake Torque (N-M)	--
50% of FL	3579	-	25.43	Mechanical Data	
No Load	--	-	12.48	Bearing DE Side	6312 C3
Hazardous Location	Class 1, Div 2, Grp A,B,C,D			Bearing NDE Side	6312 C3
				Moment of Inertia	-- kg.m2
				Noise Level	Per NEMA dB (A)
CT VFD Range		--	Loaded Torque Curves		--
			P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor		
Certifications	UL	CSA	DOE		
File Numbers	323353	224693	096A		
Wiring Diagram	3PH 12 Lead IEC Dual Voltage				
					

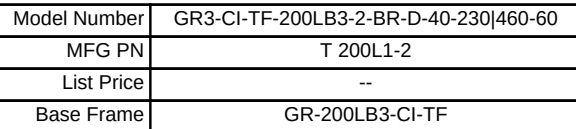[illegible]

REV.	BY	DATE
1		
2		
3		
4		
5		
6		
7		

CHANGES

MATERIAL: ALUMINUM	
UNITS: INCH	BY: SSEE
DRAWN: 8/20/2018	
WWW.TECHTOP.COM	

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540