



Model Number GR3-CI-TF-215T-2-B-F-10-575-60

MFG PN T215T10U2B

List Price --

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data

General Data

Rated Motor Output Power	10 HP	Frame Size	215
Rated Motor Speed	3520 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	575-60 Volts - HZ	Approximate Weight	165
Rated Motor Current	9.04 Amps	NEMA Design	A
Service Factor	1.25	IP Rating	55
KVA Code	K	Insulation Class	F
Nominal Efficiency	90.2 %	Tropicalization	YES
Nominal Power Factor	0.92 cosθ	Duty	Cont.
Full Load Torque Ft-Lb	15.061792 Ft-Lb	Cable Entry	1.25
Temp Rise @ Full Load °C	49.3	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO

Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	245	85	Rated Altitude (M)	1000
Breakdown	-	346	-	Coating	7024 - Graphite Grey
Pull Up	-	144	-	Shaft Grounding	NO
125% of FL	3508	-	11.2	Brake Voltage (DC)	--
75% of FL	3548	-	6.8	Brake Torque (N-M)	--
50% of FL	3564	-	4.9	Mechanical Data	
No Load	3592	-	2.4		

Hazardous Location	Class 1, Div 2, Grp A,B,C,D			Bearing DE Side	6308ZZ
				Bearing NDE Side	6308ZZ
				Moment of Inertia	-- kg.m2
				Noise Level	Per NEMA dB (A)

CT VFD Range	--	Loaded Torque Curves	--
P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor			

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A

Wiring Diagram	3PH 9 Lead Dual Voltage
----------------	-------------------------



3 Phase - YY/Y - 9 Lead

4,1 Blue / 5,2 White / 6,3 Org / 7 Yl / 8 Blk / 9 RD

Cast Iron- 1,2,3 Top - 4,5,6,7,8,9 Bottom

Aluminum - 4,5,6,8,9 Top - 1,2,3,7 Bottom

CONNECTIONS

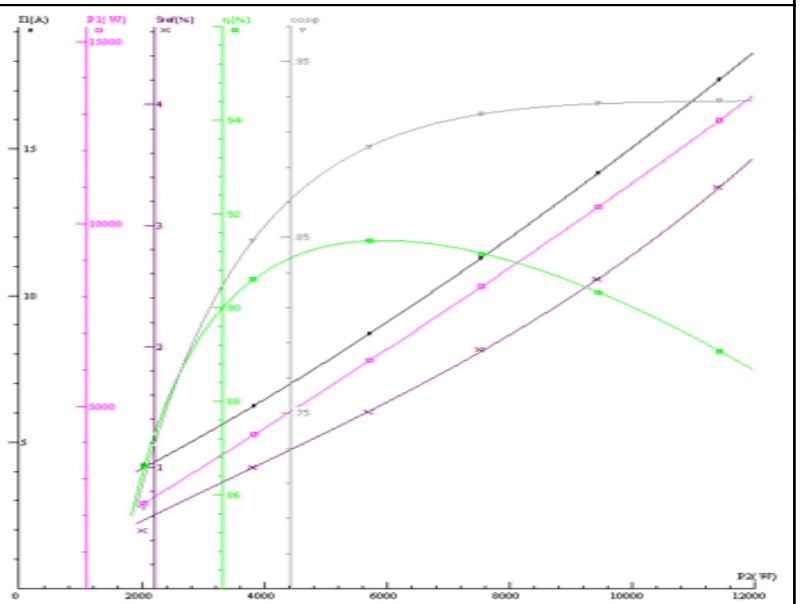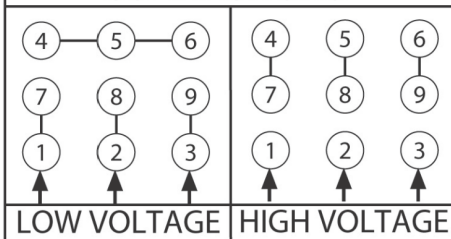

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

