



Model Number

GR3-CI-TF-215T-4-B-F-10-575-60

MFG PN

T215T 10U4B

List Price

--

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data

General Data

Rated Motor Output Power	10 HP	Frame Size	215
Rated Motor Speed	1750 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	575-60 Volts - HZ	Approximate Weight	192
Rated Motor Current	9.50 Amps	NEMA Design	BE
Service Factor	1.25	IP Rating	55
KVA Code	J	Insulation Class	F
Nominal Efficiency	91.7 %	Tropicalization	YES
Nominal Power Factor	0.86 cos θ	Duty	Cont.
Full Load Torque Ft-Lb	38.3552 Ft-Lb	Cable Entry	1.25
Temp Rise @ Full Load °C	51.3	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO

Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	212	75	Rated Altitude (M)	1000
Breakdown	-	269	-	Coating	7024 - Graphite Grey
Pull Up	-	101	-	Shaft Grounding	NO
125% of FL	1779	-	11.8	Brake Voltage (DC)	
75% of FL	1767	-	7.1	Brake Torque (N-M)	
50% of FL	1779	-	5.1	Mechanical Data	
No Load	1795	-	2.9	Bearing DE Side	6308 ZZ

Hazardous Location	Class 1, Div 2, Grp A,B,C,D			Bearing NDE Side	6308 ZZ
				Moment of Inertia	kg.m2
				Noise Level	Per NEMA dB (A)

CT VFD Range	--	Loaded Torque Curves	--
		P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), $\cos\phi$ = Power Factor	

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A

Wiring Diagram	3PH 9 Lead Dual Voltage
----------------	-------------------------



3 Phase - YY/Y - 9 Lead

4,1 Blue / 5,2 White / 6,3 Org / 7 Yl / 8 Blk / 9 RD

Cast Iron- 1,2,3 Top - 4,5,6,7,8,9 Bottom

Aluminum - 4,5,6,8,9 Top - 1,2,3,7 Bottom

CONNECTIONS

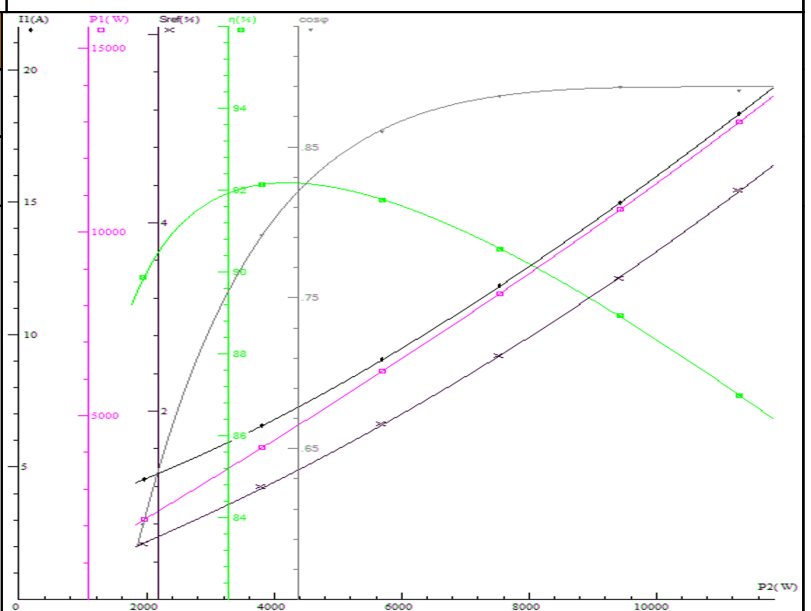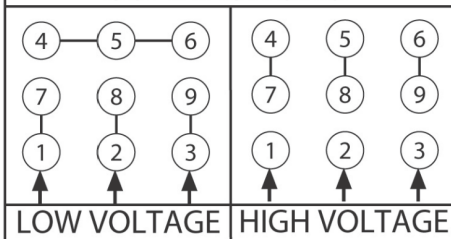

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

