



Model Number GR3-CI-TF-215TC-6-B-D-5-230|460-60

MFG PN T215T5U6B

List Price --

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data

General Data

Rated Motor Output Power	5 HP	Frame Size	215
Rated Motor Speed	1175 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	230 460-60 Volts - HZ	Approximate Weight	182
Rated Motor Current	13.8/6.9 Amps	NEMA Design	BE
Service Factor	1.25	IP Rating	55
KVA Code	K	Insulation Class	F
Nominal Efficiency	89.5 %	Tropicalization	YES
Nominal Power Factor	0.76 cosθ	Duty	Cont.
Full Load Torque Ft-Lb	Ft-Lb	Cable Entry	1.25
Temp Rise @ Full Load °C		Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO



Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	241	7.66	Rated Altitude (M)	1000
Breakdown	-	318	-	Coating	7024 - Graphite Grey
Pull Up	-	157	-	Shaft Grounding	NO
125% of FL	1169	-	8.19	Brake Voltage (DC)	
75% of FL	1183	-	5.54	Brake Torque (N-M)	
50% of FL	1189	-	4.54	Mechanical Data	
No Load	1198	-	3.58		

Hazardous Location	Class 1, Div 2, Grp A,B,C,D			Bearing DE Side	6308 ZZ
				Bearing NDE Side	6308 ZZ
				Moment of Inertia	kg.m2
				Noise Level	Per NEMA dB (A)

CT VFD Range	--	Loaded Torque Curves	--
P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor			

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A

Wiring Diagram	3PH 12 Lead Dual Voltage
----------------	--------------------------

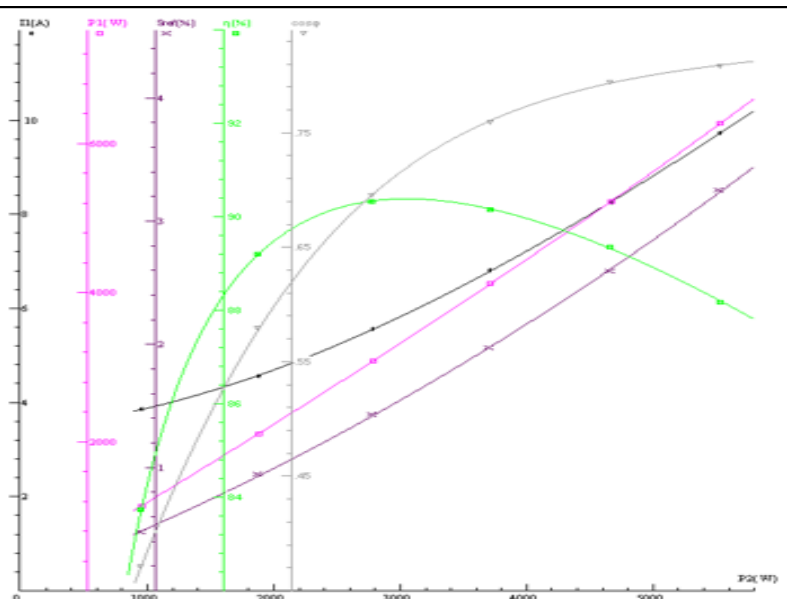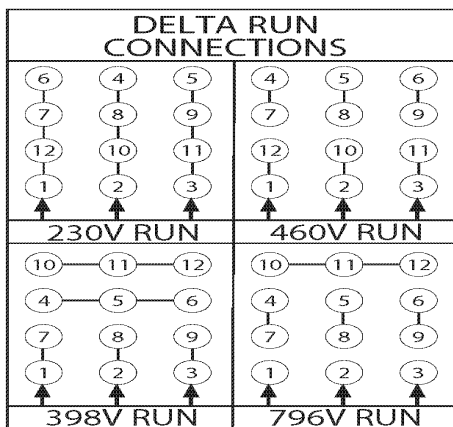

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

FRAME: 215TC | HP: | RPM: | PHASE: 3 | VOLT: 208 - 230/460V | ENCL: TEFC | FREQ: 60 Hz | FLA: | LRA:

