



Model Number GR3-CI-TF-284TS-2-BR-F-25-575-60

MFG PN T284TS25U2B

List Price --

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data

General Data

Rated Motor Output Power	25 HP	Frame Size	284
Rated Motor Speed	3545 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	575-60 Volts - HZ	Approximate Weight	353.1
Rated Motor Current	22.72 Amps	NEMA Design	A
Service Factor	1.25	IP Rating	55
KVA Code	H	Insulation Class	F
Nominal Efficiency	91.7 %	Tropicalization	YES
Nominal Power Factor	0.9 cosθ	Duty	Cont.
Full Load Torque Ft-Lb	36.43744 Ft-Lb	Cable Entry	1.25
Temp Rise @ Full Load °C	59.3	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO



Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	207	163.6	Rated Altitude (M)	1000
Breakdown	-	274	-	Coating	7024 - Graphite Grey
Pull Up	-	120	-	Shaft Grounding	NO
125% of FL	3536	-	25.7	Brake Voltage (DC)	--
75% of FL	3560	-	17	Brake Torque (N-M)	--
50% of FL	3574	-	12.11	Mechanical Data	
No Load	3594	-	5.5		

Hazardous Location	Class 1, Div 2, Grp A,B,C,D			Bearing DE Side	6311 C3
				Bearing NDE Side	6311 C3
				Moment of Inertia	-- kg.m2
				Noise Level	Per NEMA dB (A)





CT VFD Range	--	Loaded Torque Curves	--
P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor			

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A

Wiring Diagram	3PH 12 Lead Dual Voltage
----------------	--------------------------

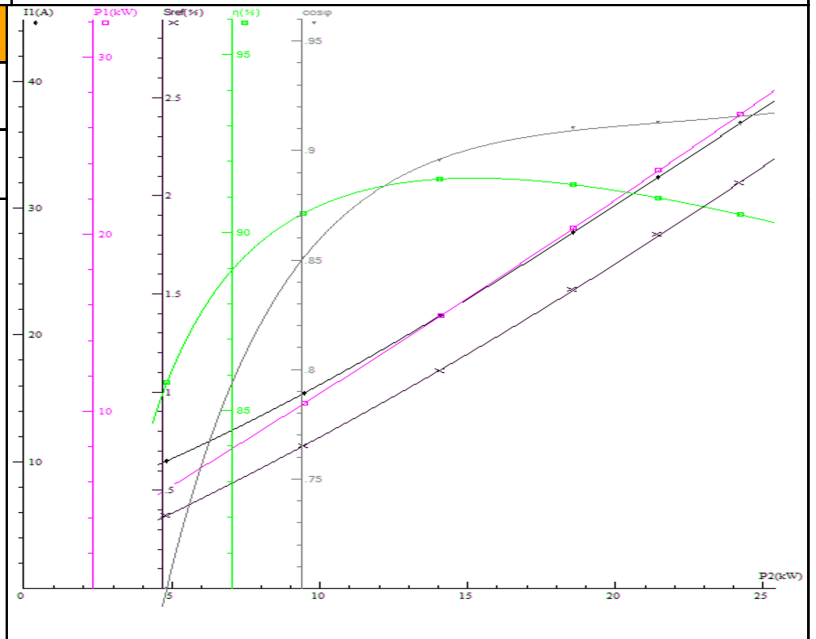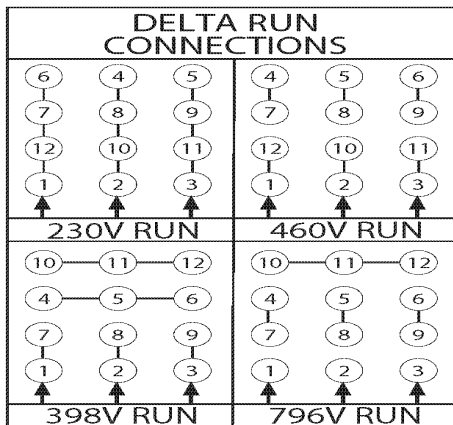

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

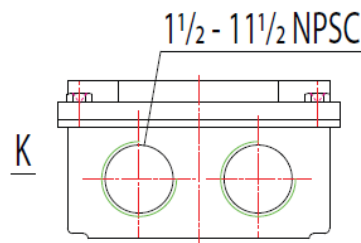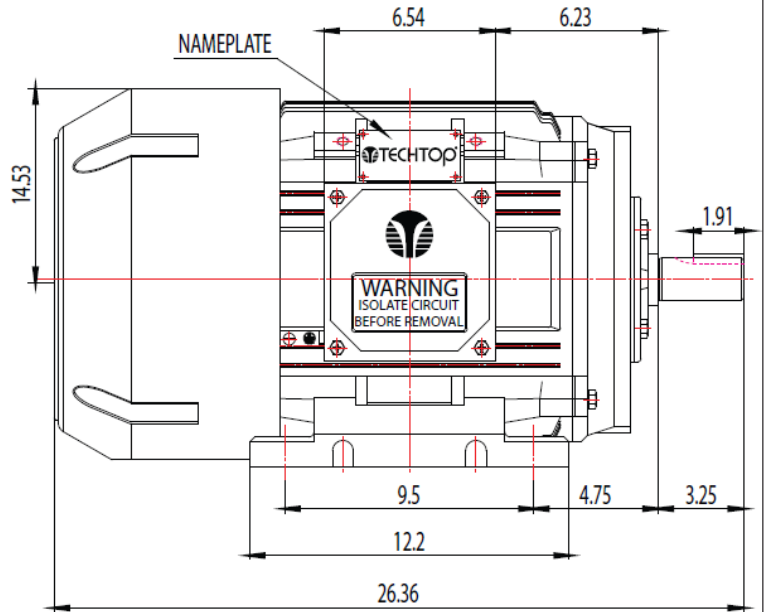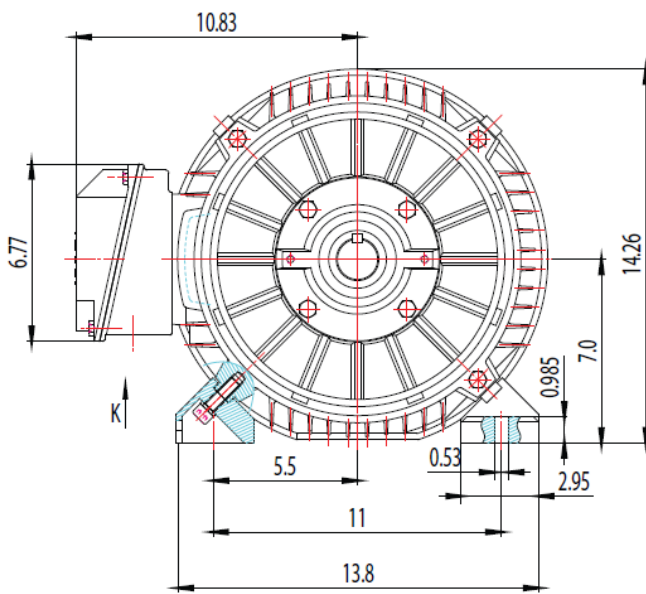

MATERIAL: ALUMINUM
UNITS: INCH BY: SSEE
DRAWN: 6/26/2018
WWW.TECHTOP.COM

MODEL NUMBER:
GR3-CI-TF-284TS
MFG PN:

REV.	BY	DATE
1		
2		
3		
4		
5		
6		
7		

CHANGES