



Model Number GR3-CI-TF-364TS-2-BR-F-60-575-60

MFG PN T364TS60U2B

List Price --

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data

General Data

Rated Motor Output Power	60 HP	Frame Size	364
Rated Motor Speed	3560 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	575-60 Volts - HZ	Approximate Weight	760
Rated Motor Current	53.6 Amps	NEMA Design	A
Service Factor	1.15	IP Rating	55
KVA Code	K	Insulation Class	F
Nominal Efficiency	93.6 %	Tropicalization	YES
Nominal Power Factor	0.9 cosθ	Duty	Cont.
Full Load Torque Ft-Lb	88.512 Ft-Lb	Cable Entry	1.25
Temp Rise @ Full Load °C	56.4	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO



Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	292	502	Rated Altitude (M)	1000
Breakdown	-	325	-	Coating	7024 - Graphite Grey
Pull Up	-	192	-	Shaft Grounding	NO
125% of FL	3561	-	66.4	Brake Voltage (DC)	--
75% of FL	3578	-	41.28	Brake Torque (N-M)	--
50% of FL	3585	-	30	Mechanical Data	
No Load	3595	-	15.66		





Hazardous Location	Class 1, Div 2, Grp A,B,C,D			Bearing DE Side	6313 C3
				Bearing NDE Side	6313 C3
				Moment of Inertia	-- kg.m2
				Noise Level	Per NEMA dB (A)

CT VFD Range	--	Loaded Torque Curves	--
P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor			

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A

Wiring Diagram	3PH 12 Lead Dual Voltage
----------------	--------------------------

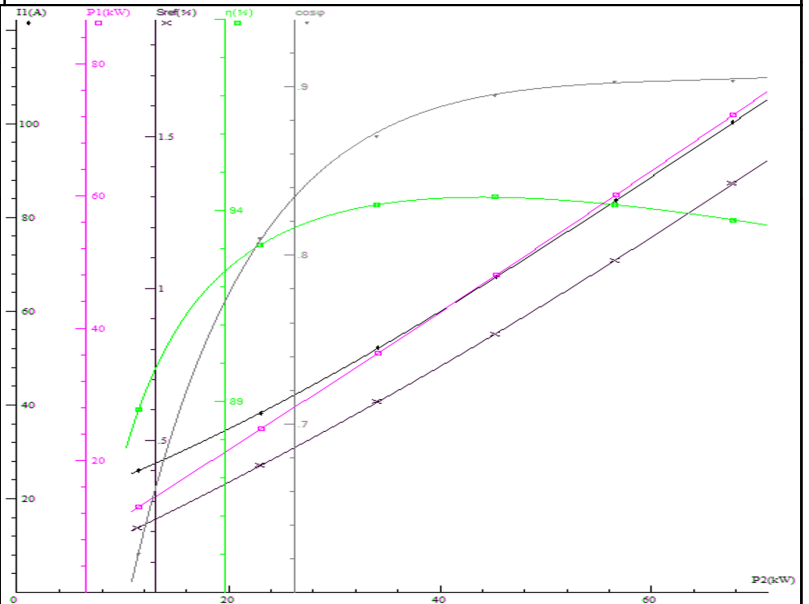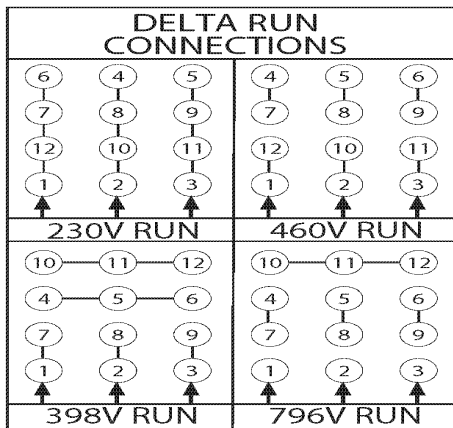

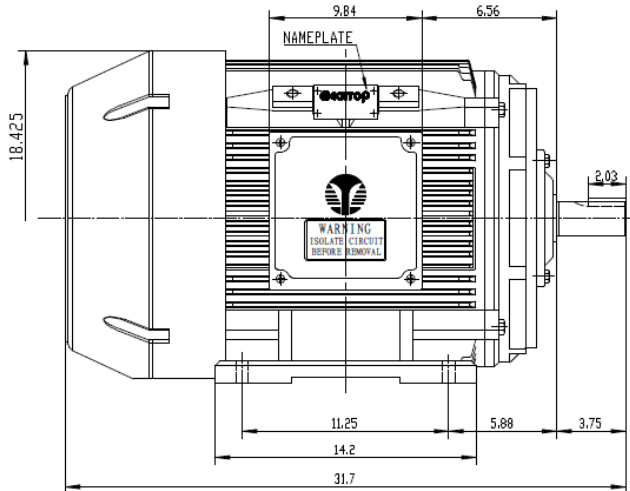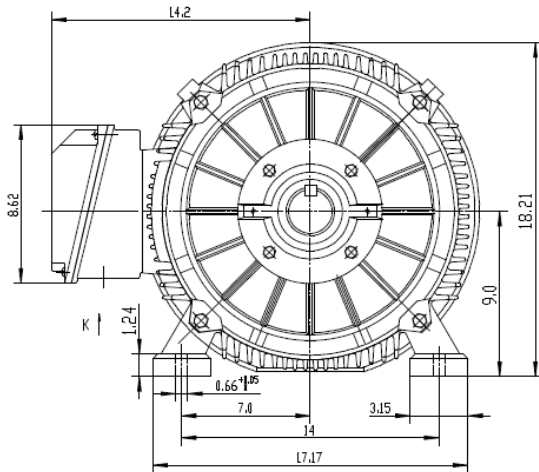


ShangHai HIMAK Electrical Machinery CO.,LTD

NEMA TEFC 364TS

Design	Yang	Standard	
Checker	01.06.2016	Allow	
Auditing		Date	

NO: TXC 364TS CFC

STEP MARK	1+5	SDRT	Cast iron Motor
-----------	-----	------	-----------------