




Model Number GX3-AL-TF-184T-4-B-D-5-230|460-60

MFG PN T184T 5U4B



List Price --

All data shown at HIGH voltage setting

Format STD 3 Phase

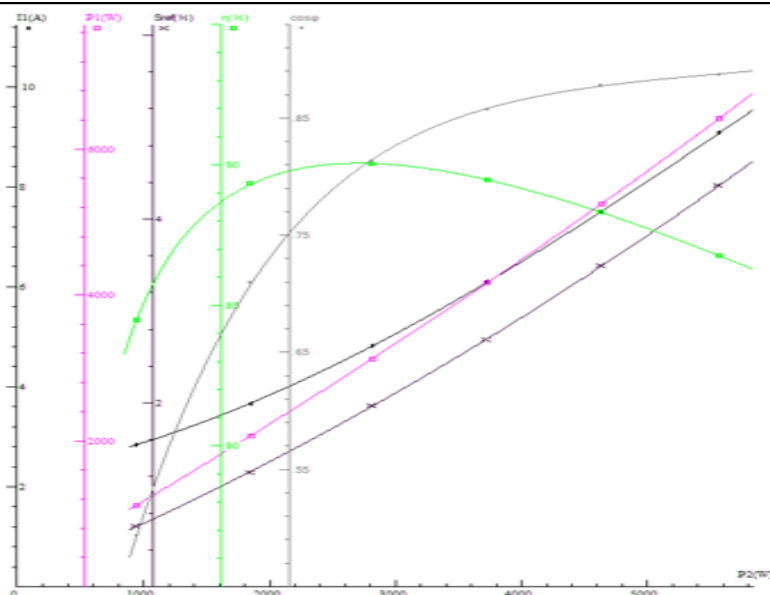Electrical Data				General Data	
Rated Motor Output Power		5 HP		Frame Size	184
Rated Motor Speed		1750 r/min		Enclosure	TEFC
Rated Motor Voltage (3 Phase)		230 460-60 Volts - HZ		Approximate Weight	74
Rated Motor Current		12.4/6.18 Amps		NEMA Design	BE
Service Factor		1.25		IP Rating	55
KVA Code		L		Insulation Class	F
Nominal Efficiency		89.5 %		Tropicalization	YES
Nominal Power Factor		0.84 cosθ		Duty	Cont.
Full Load Torque Ft-Lb		14.8604272 Ft-Lb		Cable Entry	1.25
Temp Rise @ Full Load °C		37		Feet Removable	YES
Efficiency Level		IE3 - NEMA Premium		Double Drilled	NO
Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	281	52.98	Rated Altitude (M)	1000
Breakdown	-	345	-	Coating	7024 - Graphite Grey
Pull Up	-	190	-	Shaft Grounding	YES
125% of FL	1737.4	-	7.4907	Brake Voltage (DC)	
75% of FL	1765.2	-	4.7632	Brake Torque (N-M)	
50% of FL	1777.4	-	3.6736	Mechanical Data	
No Load		-	2.512	Bearing DE Side	6306 ZZ
Hazardous Location	Class 1, Div 2, Grp A,B,C,D			Bearing NDE Side	6206 ZZ
				Moment of Inertia	kg.m2
				Noise Level	Per NEMA dB (A)
CT VFD Range		--	Loaded Torque Curves		--
			P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor		
Certifications	UL	CSA	DOE		
File Numbers	323353	224693	096A		
Wiring Diagram	3PH 9 Lead Dual Voltage				
3 Phase - YY/Y - 9 Lead 4,1 Blue / 5,2 White / 6,3 Org / 7 Yl / 8 Blk / 9 RD Cast Iron- 1,2,3 Top - 4,5,6,7,8,9 Bottom Aluminum - 4,5,6,8,9 Top - 1,2,3,7 Bottom CONNECTIONS 4 5 6 7 8 9 1 2 3 LOW VOLTAGE 4 5 6 7 8 9 1 2 3 HIGH VOLTAGE					

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

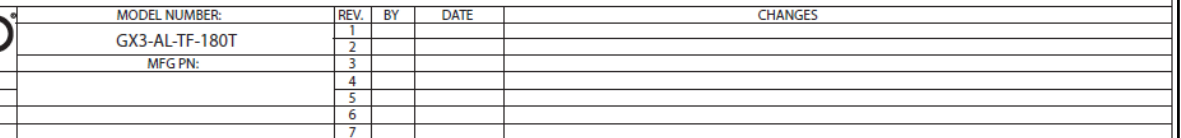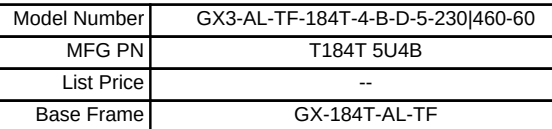

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540