



Model Number GX3-AL-TF-213T-4-B-F-7.5-575-60

MFG PN T213T7.5U4B

List Price --

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data

General Data



Rated Motor Output Power	7.5 HP	Frame Size	213
Rated Motor Speed	1765 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	575-60 Volts - HZ	Approximate Weight	126.28
Rated Motor Current	7.08 Amps	NEMA Design	A
Service Factor	1.25	IP Rating	55
KVA Code	L	Insulation Class	F
Nominal Efficiency	91.7 %	Tropicalization	YES
Nominal Power Factor	0.85 cos ϕ	Duty	Cont.
Full Load Torque Ft-Lb	16.26176689 Ft-Lb	Cable Entry	1.25
Temp Rise @ Full Load °C	36	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO

Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	230	72	Rated Altitude (M)	1000
Breakdown	-	324	-	Coating	7024 - Graphite Grey
Pull Up	-	484	-	Shaft Grounding	Yes
125% of FL	1752	-	7.93	Brake Voltage (DC)	--
75% of FL	1773	-	5.7	Brake Torque (N-M)	--
50% of FL	1782	-	4.48	Mechanical Data	
No Load	--	-	3.12		

Hazardous Location	Class 1, Div 2, Grp A,B,C,D			Bearing DE Side	6308ZZ
				Bearing NDE Side	6308ZZ
				Moment of Inertia	-- kg.m2
				Noise Level	Per NEMA dB (A)

CT VFD Range	--	Loaded Torque Curves	--
P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cos ϕ = Power Factor			

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A
Wiring Diagram	3PH 12 Lead Dual Voltage		

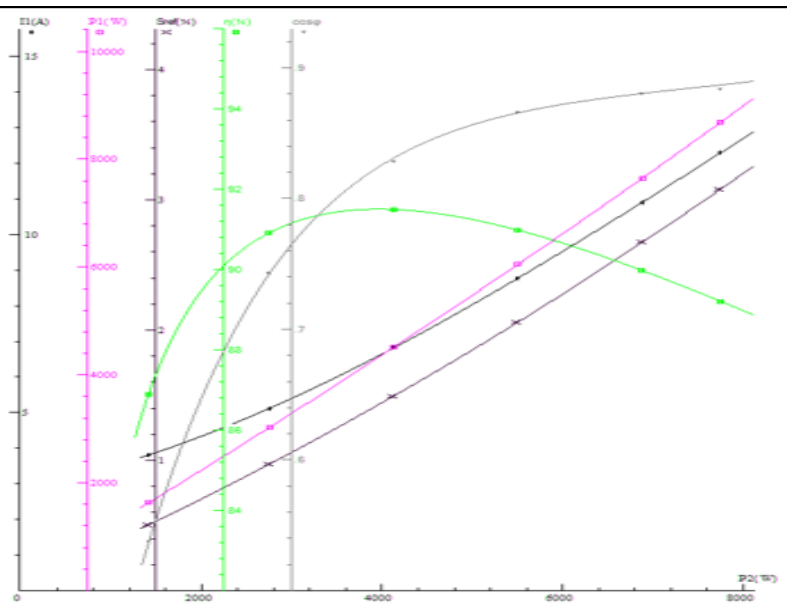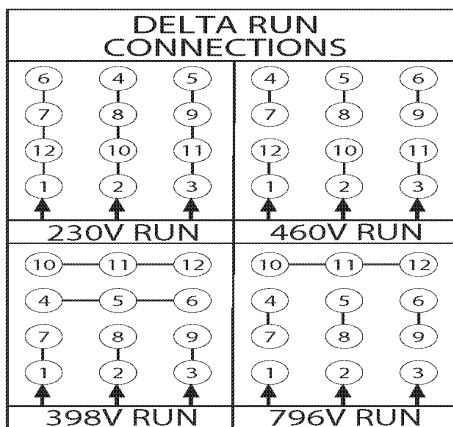

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

FRAME: 210T	HP:	RPM:	PHASE: 3	VOLT: 208-230/460V	ENCL: TEFC	FREQ: 60 Hz	FLA:	LRA:
-------------	-----	------	----------	--------------------	------------	-------------	------	------

