



Model Number	GX3-AL-TF-284T-6-B-D-15-230 460-60
MFG PN	T284T15U6B
List Price	--

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data		General Data	
Rated Motor Output Power	15 HP	Frame Size	284
Rated Motor Speed	1180 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	230 460-60 Volts - HZ	Approximate Weight	260.92
Rated Motor Current	38.2/19.1 Amps	NEMA Design	A
Service Factor	1.25	IP Rating	55
KVA Code	K	Insulation Class	F
Nominal Efficiency	91.7 %	Tropicalization	YES
Nominal Power Factor	0.79 cos ϕ	Duty	Cont.
Full Load Torque Ft-Lb	67.1216 Ft-Lb	Cable Entry	1.25
Temp Rise @ Full Load °C	41.9	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO



Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	
Locked Rotor	-	238	170.5	Rated Altitude (M)	1000
Breakdown	-	333	-	Coating	7024 - Graphite Grey
Pull Up	-	123	-	Shaft Grounding	Yes
125% of FL	1180	-	21.37	Brake Voltage (DC)	--
75% of FL	1188	-	15.25	Brake Torque (N-M)	--
50% of FL	1192	-	12.14	Mechanical Data	
No Load	1196	-	9	Bearing DE Side	6311 C3

Hazardous Location	Class 1, Div 2, Grp A,B,C,D		Bearing NDE Side	6311 C3
			Moment of Inertia	-- kg.m2
			Noise Level	Per NEMA dB (A)

CT VFD Range	--	Loaded Torque Curves	
		P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cos ϕ = Power Factor	

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A


Wiring Diagram	3PH 12 Lead Dual Voltage
----------------	--------------------------

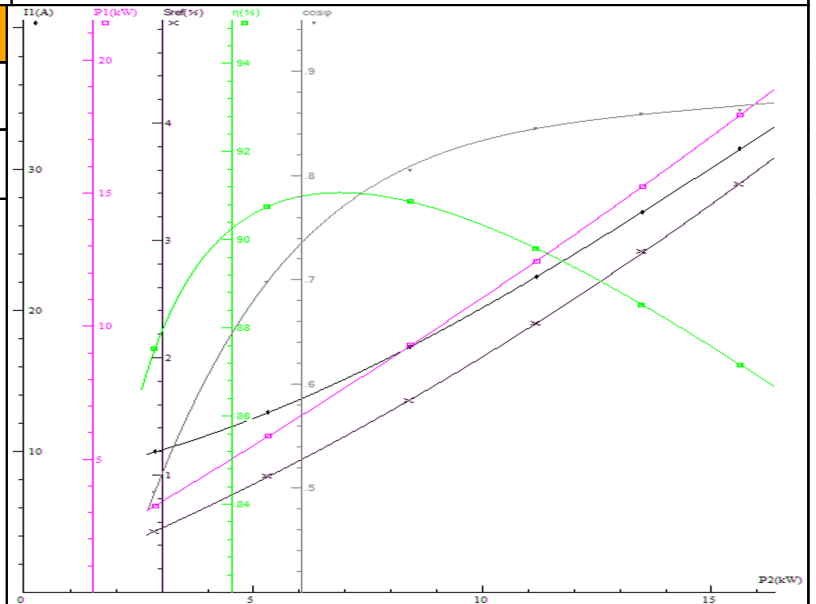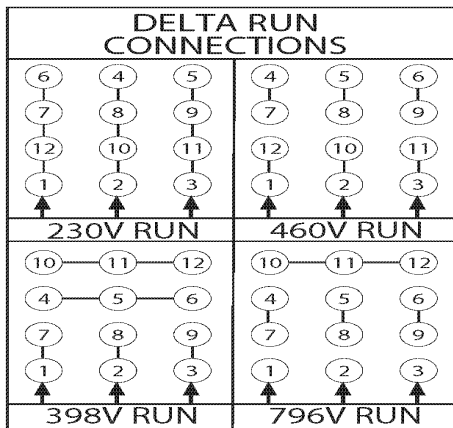



Model Number	GX3-AL-TF-284T-6-B-D-15-230 460-60
MFG PN	T284T15U6B
List Price	--
Base Frame	GX-284T-AL-TF

FRAME: 280T HP: RPM: PHASE: 3 VOLT: 208-230/460V ENCL: TEFC FREQ: 60 Hz FLA: LRA:

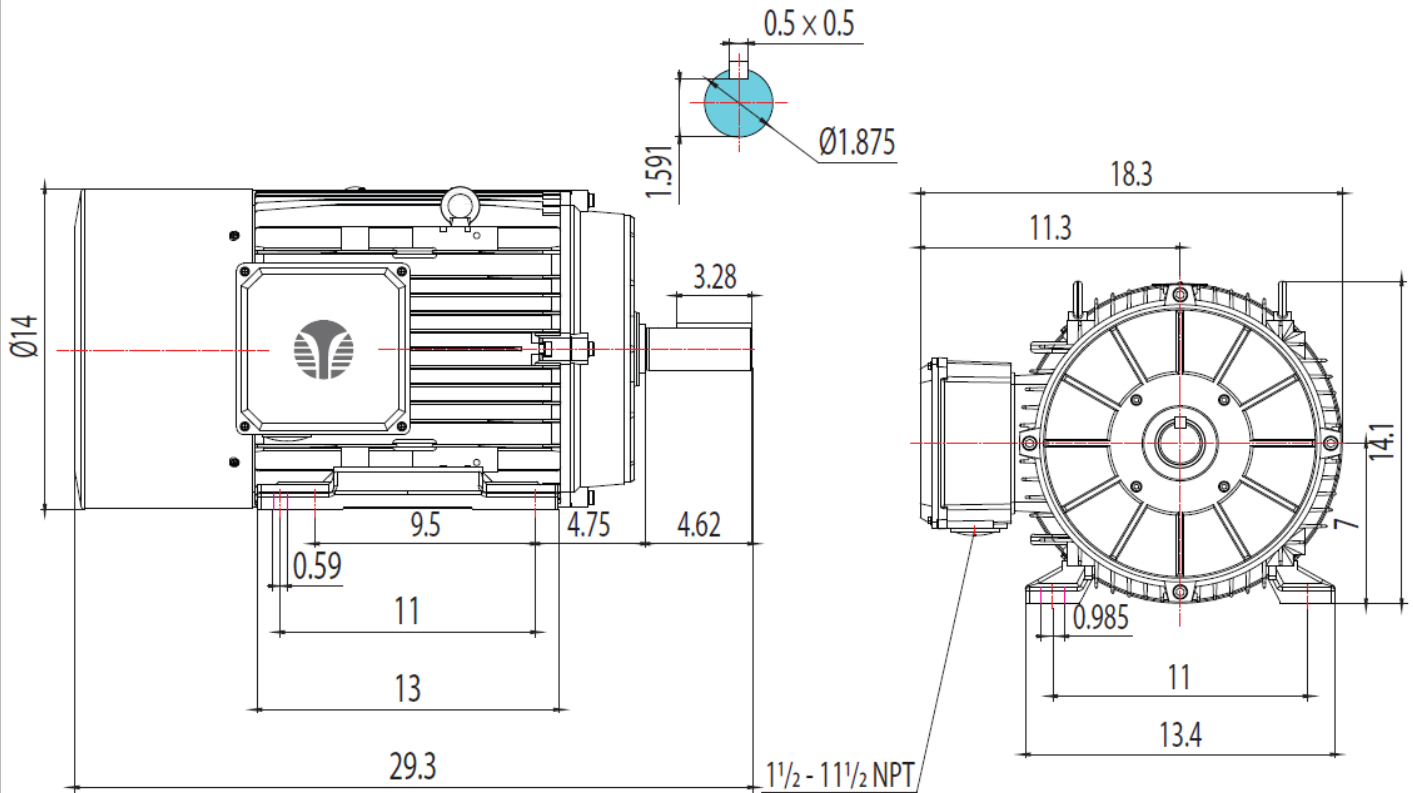

MODEL NUMBER:
GX3-AL-TF-280T
MFG PN:

REV.	BY	DATE
1		
2		
3		
4		
5		
6		
7		

CHANGES

MATERIAL: ALUMINUM
UNITS: INCH BY: SSEE
DRAWN: 7/31/2019
WWW.TECHTOP.COM

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540