
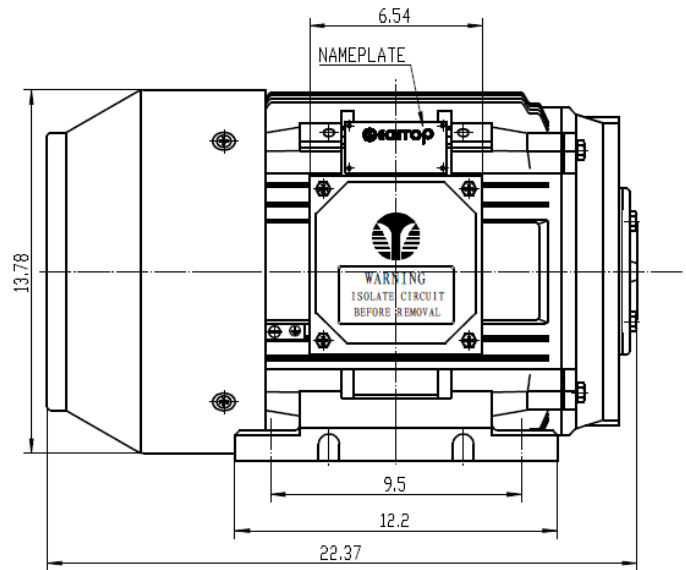



				Model Number		PC3-CI-TF-284T-4-BR-B-25-208-230-60	
				MFG PN		--	
				List Price		--	
All data shown at HIGH voltage setting						Format STD 3 Phase	
Electrical Data				General Data			
Rated Motor Output Power		25 HP		Frame Size		284	
Rated Motor Speed		-- r/min		Enclosure		TEFC	
Rated Motor Voltage (3 Phase)		208-230-60 Volts - HZ		Approximate Weight		341	
Rated Motor Current		-- Amps		NEMA Design		--	
Service Factor		--		IP Rating		--	
KVA Code		--		Insulation Class		--	
Nominal Efficiency		-- %		Tropicalization		--	
Nominal Power Factor		-- cosθ		Duty		--	
Full Load Torque Ft-Lb		-- Ft-Lb		Cable Entry		--	
Temp Rise @ Full Load °C		--		Feet Removable		--	
Efficiency Level		IE2 - High (EPact)		Double Drilled		--	
Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)		--	
Locked Rotor	-	--	--	Rated Altitude (M)		--	
Breakdown	-	--	-	Coating		-- - -	
Pull Up	-	--	-	Shaft Grounding		NO	
125% of FL	--	-	--	Brake Voltage (DC)		--	
75% of FL	--	-	--	Brake Torque (N-M)		--	
50% of FL	--	-	--	Mechanical Data			
No Load	--	-	--	Bearing DE Side		--	
Hazardous Location	Class 1, Div2 Grp A,B,C,D			Bearing NDE Side		--	
				Moment of Inertia		-- kg.m2	
				Noise Level		Per NEMA dB (A)	
CT VFD Range		--		Loaded Torque Curves		--	
				P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor			
Certifications	UL	CSA	DOE				
File Numbers	--	--	--				
Wiring Diagram	--						
Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540							

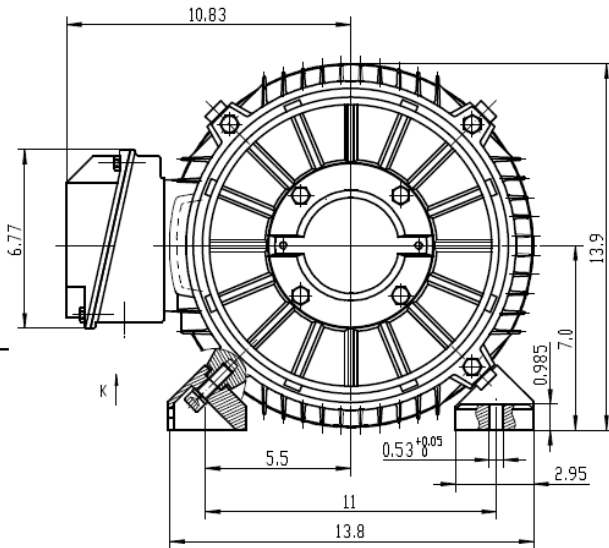

TECHTOP

ShangHai HIMAK Electrical Machinery CO.,LTD

NEMA TEFC 284T

Design		Standard		NO:	TFCR284T25U4B
Checker		Allow		STEP MARK	1:3.5 SORT
Auditing		Date			Cast iron Motor