



Model Number

SD3-213T-4-BR-E-7.5-460-60

MFG PN

T213T7.5U2B

List Price

--

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data

General Data



Rated Motor Output Power	7.5 HP	Frame Size	213
Rated Motor Speed	3510 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	460-60 Volts - HZ	Approximate Weight	141
Rated Motor Current	8.5 Amps	NEMA Design	B
Service Factor	1.25	IP Rating	56
KVA Code	H	Insulation Class	F
Nominal Efficiency	89.5 %	Tropicalization	YES
Nominal Power Factor	0.92 cosθ	Duty	Cont.
Full Load Torque Ft-Lb	14.78 Ft-Lb	Cable Entry	1.25
Temp Rise @ Full Load °C	48	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO

Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	190	67.78	Rated Altitude (M)	1000
Breakdown	-	302	-	Coating	7024 - Graphite Grey
Pull Up	-	135	-	Shaft Grounding	YES
125% of FL	3482	-	10.61	Brake Voltage (DC)	--
75% of FL	3534	-	6.4	Brake Torque (N-M)	--
50% of FL	3557	-	4.57	Mechanical Data	
No Load	--	-	2.08		



Hazardous Location	CL1 Div2 Grp A,B,C,D	Bearing DE Side	6308ZZ
		Bearing NDE Side	6308ZZ
		Moment of Inertia	-- kg.m2
		Noise Level	Per NEMA dB (A)

CT VFD Range	--	Loaded Torque Curves	--
P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor			

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A
Wiring Diagram	3PH Single Voltage SD3		

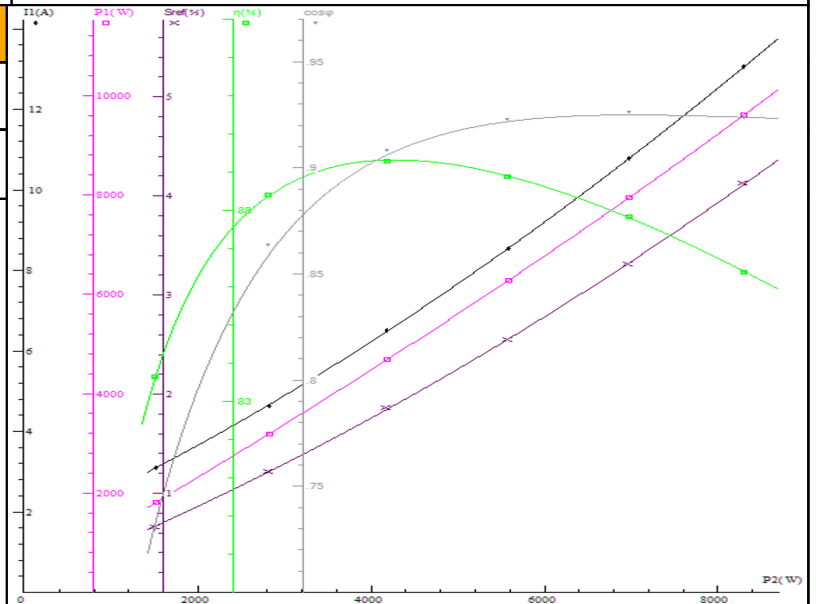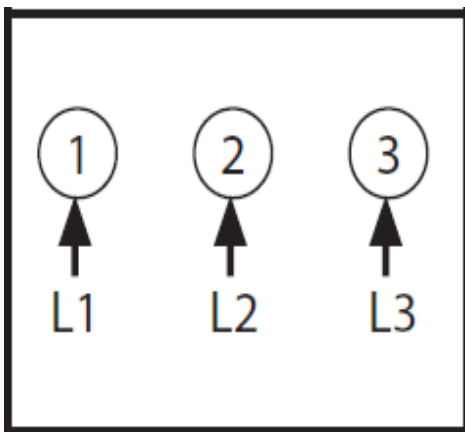

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

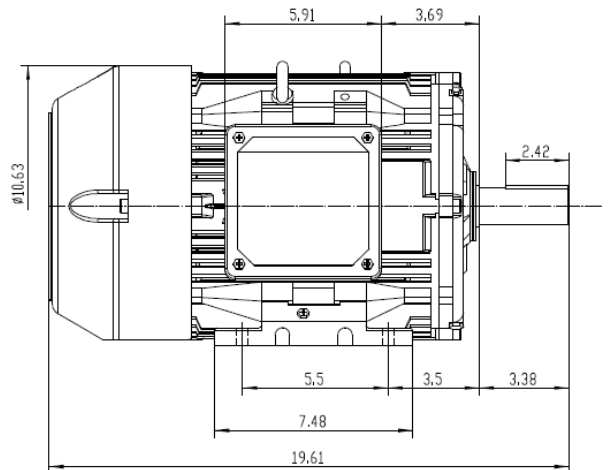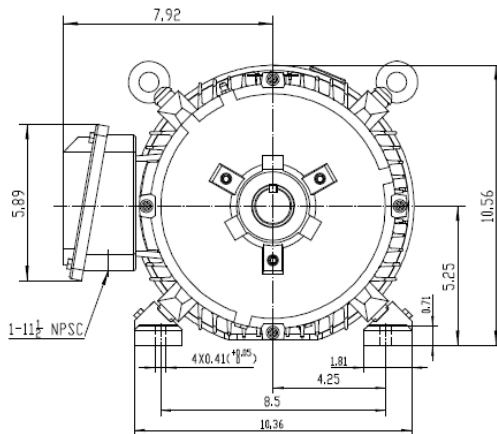


NOTES:

1. All Cast Iron Construction
2. Design B
3. IP55 Labyrinth seals on DE and DDE
4. H Class Insulation System
5. Max Winding Temperature rise 80°C
6. Max bearing temperature rise 45°C for 4 pole and 50°C for 2 pole motors when direct coupled.
7. Regreasable bearings
8. External Grounding provisions
9. Maximum foot flatness deviation .127 mm
10. Conductive Polymer Cooling Fan
11. Diagonally Split Conduit Box rotatable In 90° Increments
12. Lead seals in conduit box
13. Maximum no load sound power 85 dBA(2 pole),
Maximum no load sound power 70 dBA(4 pole),
Maximum no load sound power 64 dBA(6 pole).
14. No Load Motor Vibration not to exceed
a.Radial 60HZ - 2.03mm/s (2,4 pole) and 1.52mm/s (6 pole)
b.Axial 60HZ - 1.52mm/s
15. 300 series Stainless Steel hardware
16. Epoxy Coating meeting ASTM B117-97 for 96 h
17. All internal surfaces coated with anti-corrosion coating.
18. Internal Shaft Grounding brush installed on drive end.
19. No Load test report Included with motor

TECHTOP IEEE 841 SEVERE DUTY ELECTRIC MOTOR	
MODEL SD3-213T-4-BR-E-3	TECHTOP.COM
HP 3	50 Hz 3
RPM 1175	965
VOLTS 460	380
FLA 4.4	5.0
SF 1.25	1
KVA CODE K	H
NOM EFF 0.895	
DATE 05/08/02	DESIGN B
FRAME 213T	TEMP C
ENCL 55	IP Cont
DUTY H	INS CL H
AMB 40 °C	WEIGHT 157.5 lbs
ARRESTOR CODE 6300-2	224093
VFD 10:1 CT-1.0 SF	MADE IN CHINA

CONNECTIONS

T1 T2 T3



ShangHai HIMAK Electrical Machinery CO., LTD

NEMA TEFC 213T-3HP-6P
IEEE-841 UNITS:INCH

Design	Standard	NO:	CY254.A20.003
Checker	Allow	STEP MARK	1:3.5 SORT Cast iron Motor
Auditing	Date		