



Model Number

SD3-215T-4-BR-E-10-460-60

MFG PN

T215T10U4B

List Price

--

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data

General Data

Rated Motor Output Power	10 HP	Frame Size	215
Rated Motor Speed	1750 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	460-60 Volts - HZ	Approximate Weight	191.6
Rated Motor Current	12.6 Amps	NEMA Design	B
Service Factor	1.25	IP Rating	56
KVA Code	H	Insulation Class	F
Nominal Efficiency	91.7 %	Tropicalization	YES
Nominal Power Factor	0.81 cosθ	Duty	Cont.
Full Load Torque Ft-Lb	40.69 Ft-Lb	Cable Entry	1.25
Temp Rise @ Full Load °C	47.1	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO

Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	199	79.44	Rated Altitude (M)	1000
Breakdown	-	248	-	Coating	7024 - Graphite Grey
Pull Up	-	143	-	Shaft Grounding	YES
125% of FL	1749	-	15.76	Brake Voltage (DC)	--
75% of FL	1773	-	9.82	Brake Torque (N-M)	--
50% of FL	1783	-	7.43	Mechanical Data	
No Load	1794	-	4.57	Bearing DE Side	6308ZZ

Hazardous Location	CL1 Div2 Grp A,B,C,D	Bearing NDE Side	6308ZZ
		Moment of Inertia	-- kg.m2
		Noise Level	Per NEMA dB (A)

CT VFD Range	--	Loaded Torque Curves	--
P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor			

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A

Wiring Diagram	3PH 9 Lead Dual Voltage
----------------	-------------------------



3 Phase - YY/Y - 9 Lead

4,1 Blue / 5,2 White / 6,3 Org / 7 Yl / 8 Blk / 9 RD



Cast Iron- 1,2,3 Top - 4,5,6,7,8,9 Bottom

Aluminum - 4,5,6,8,9 Top - 1,2,3,7 Bottom

CONNECTIONS

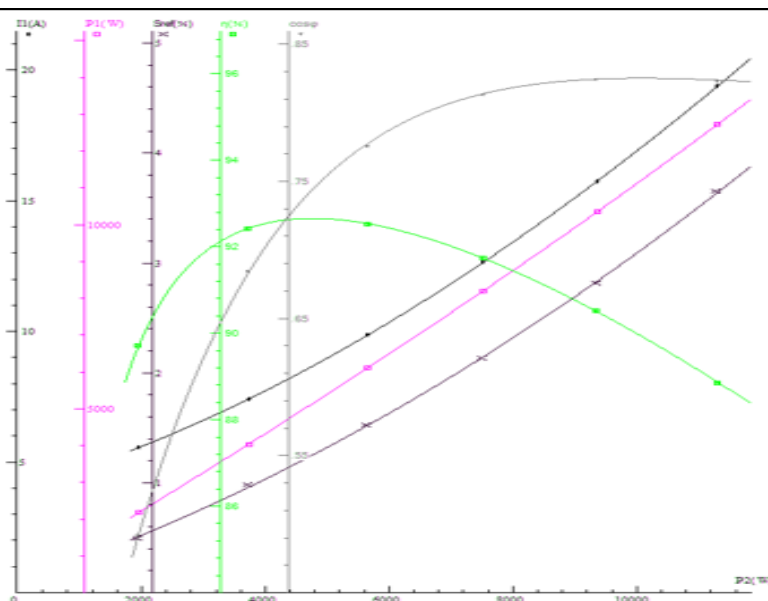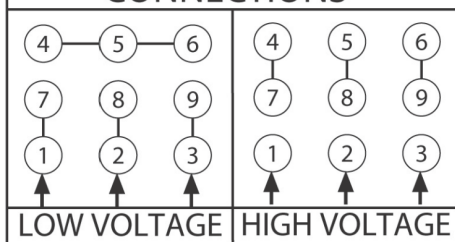

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

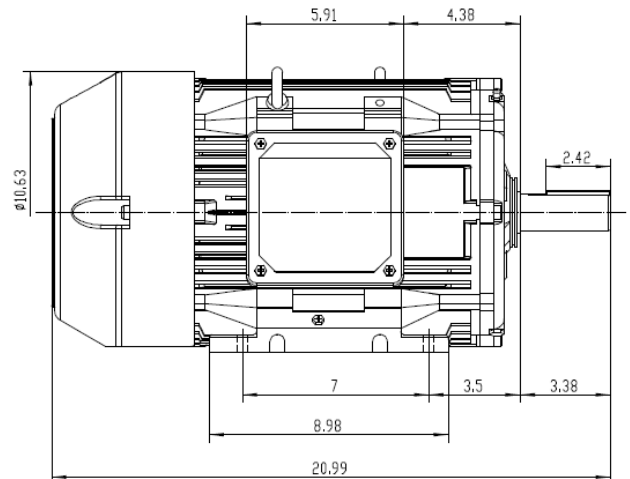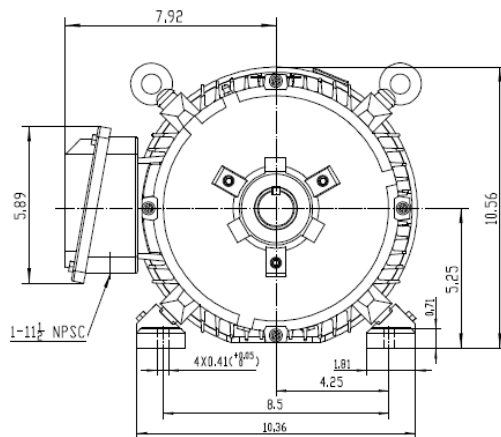


NOTES:

1. All Cast Iron Construction
2. Design B
3. IP55 Labyrinth seals on DE and DDE
4. H Class Insulation System
5. Max Winding Temperature rise 80°C
6. Max bearing temperature rise 45°C for 4 pole and 50°C for 2 pole motors when direct coupled.
7. Regreasable bearings
8. External Grounding provisions
9. Maximum foot flatness deviation .127 mm
10. Conductive Polymer Cooling Fan
11. Diagonally Split Conduit Box rotatable In 90° Increments
12. Lead seals in conduit box
13. Maximum no load sound power 85 dBA(2 pole),
Maximum no load sound power 70 dBA(4 pole),
Maximum no load sound power 64 dBA(6 pole).
14. No Load Motor Vibration not to exceed
a.Radial 60HZ - 2.03mm/s (2,4 pole) and 1.52mm/s (6 pole)
b.Axial 60HZ - 1.52mm/s
15. 300 series Stainless Steel hardware
16. Epoxy Coating meeting ASTM B117-97 for 96 h
17. All internal surfaces coated with anti-corrosion coating.
18. Internal Shaft Grounding brush installed on drive end.
19. No Load test report Included with motor

TECHTOP IEEE 841 SEVERE DUTY ELECTRIC MOTOR			
MODEL SD3-215T-4-BR-E-5			
NEMA PREMIUM		TECHTOP.COM	
HP	5	MFG PN	T 215TSU68
RPM	1175	DATE	0688002
VOLT(3Ø)	460	DESIGN	B
FLA	6.9	FRAME	215T
SF	1.25	ENCL	TEFC
KVA CODE	J	IP	55
NOM.EFF	0.895	DUTY	Cont.
BEARING SIZE		INS CL	H
DE 83082		AMB	40 °C
VFD 15:1 CT-1.0 SF		WEIGHT	181.8 lbs
MADE IN CHINA		Empty Weight 234093	

CONNECTIONS

T1 T2 T3



ShangHai HIMAK Electrical Machinery CO., LTD

NEMA TEFC 215T-5HP-6P
IEEE-841 UNITS:INCH

Design	Standard	NO:	CY254.A20.006
Checker	Allow	STEP MARK	1:3.5
Auditing	Date	SORT	Cast iron Motor