



Model Number XR3-AL-TF-100LB3-6-B-D-2-190|380-50

MFG PN T 100L1-6

List Price --



All data shown at HIGH voltage setting


Format STD 3 Phase

Electrical Data				General Data	
Rated Motor Output Power	2 HP			Frame Size	100
Rated Motor Speed	960 r/min			Enclosure	TEFC
Rated Motor Voltage (3 Phase)	190 380-50 Volts - HZ			Approximate Weight	57
Rated Motor Current	6.99/3.49 Amps			NEMA Design	BE
Service Factor	1.15			IP Rating	55
KVA Code	H			Insulation Class	H
Nominal Efficiency	87 %			Tropicalization	YES
Nominal Power Factor	0.75 cosθ			Duty	Cont.
Full Load Torque Ft-Lb	8.03984 Ft-Lb			Cable Entry	M20 X 1.5
Temp Rise @ Full Load °C	21			Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium			Double Drilled	NO
Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	219	14	Rated Altitude (M)	1000
Breakdown	-	268	-	Coating	7024 - Graphite Grey
Pull Up	-	204	-	Shaft Grounding	YES
125% of FL	999.3	-	3.8	Brake Voltage (DC)	--
75% of FL	999.7	-	2.1	Brake Torque (N-M)	--
50% of FL	999.8	-	1.75	Mechanical Data	
No Load	--	-	1.44	Bearing DE Side	6206ZZ
Hazardous Location	Class 1, Div 2, Grp A,B,C,D			Bearing NDE Side	6206ZZ
				Moment of Inertia	-- kg.m2
				Noise Level	Per NEMA dB (A)

CT VFD Range		--	Loaded Torque Curves	
			P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor	

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A
Wiring Diagram	3PH 9 Lead IEC Dual Voltage		

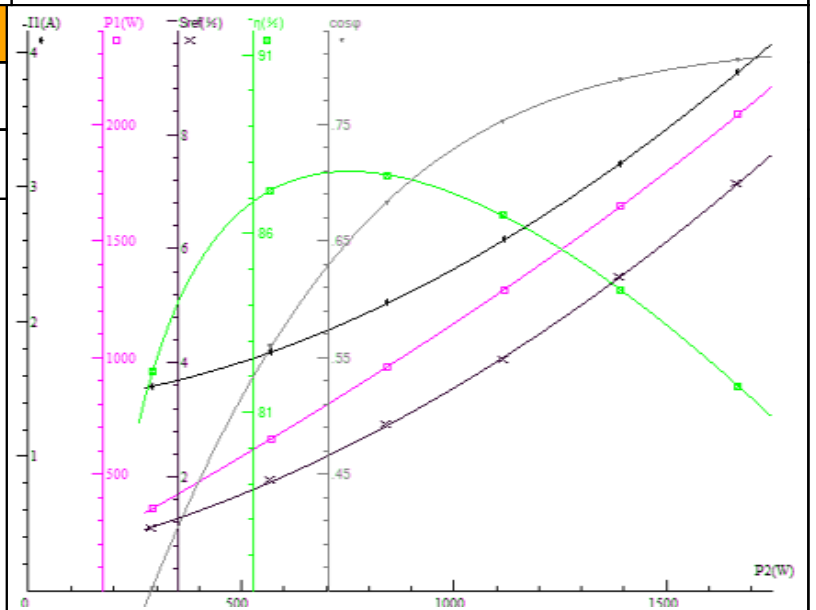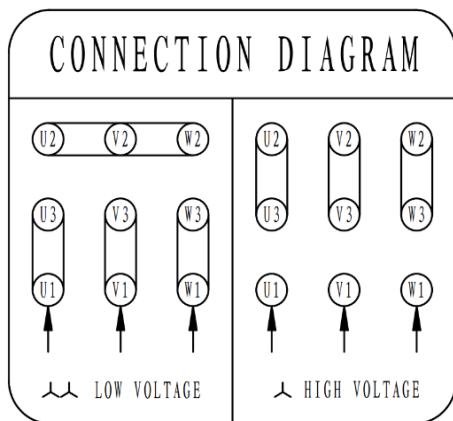

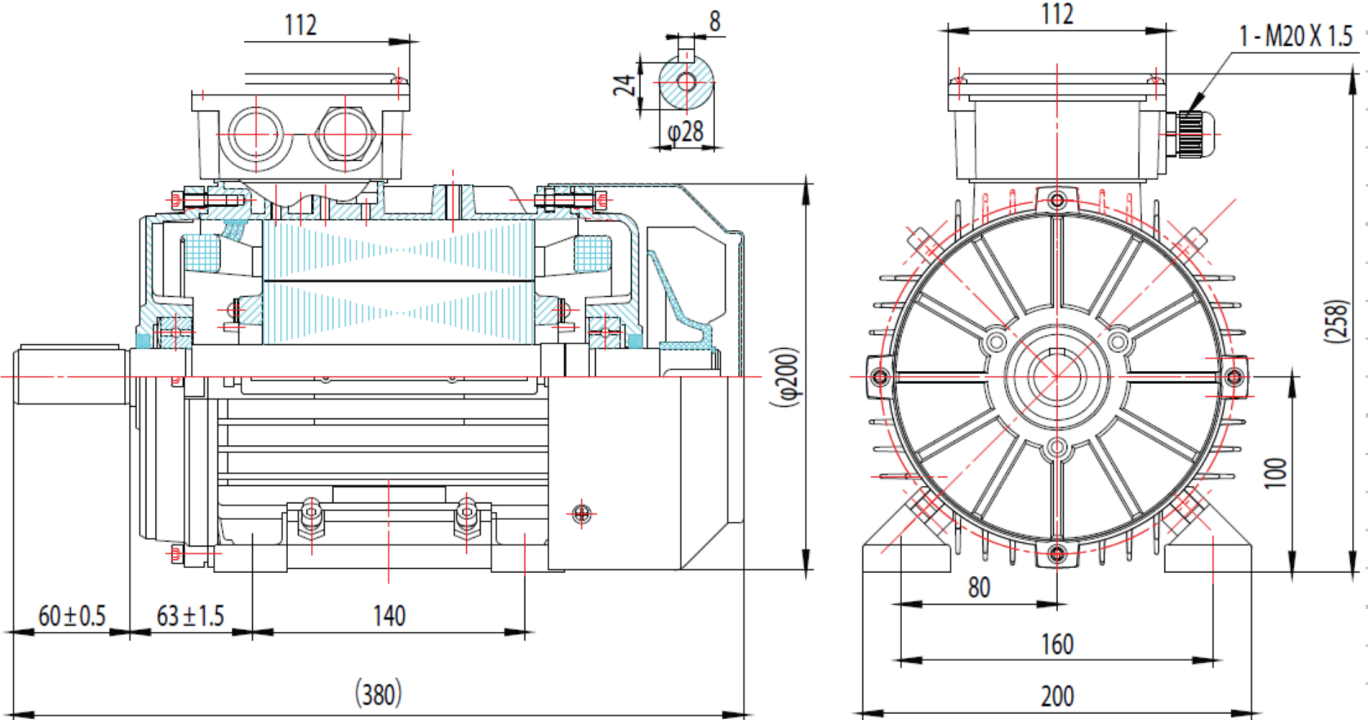

MODEL NUMBER	XR-100LB3-AL	ISSUE DATE:	04/2025
DIMENSIONS	in		
CASTING MATERIAL	ALUMINUM	WWW.TECHTOPIND.COM	

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540