




Model Number	XR3-AL-TF-132SB35-2-B-D-7.5-190 380-50
MFG PN	T132S1-2
List Price	--

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data				General Data	
Rated Motor Output Power		7.5 HP		Frame Size	132
Rated Motor Speed		2930 r/min		Enclosure	TEFC
Rated Motor Voltage (3 Phase)		190 380-50 Volts - HZ		Approximate Weight	98.8
Rated Motor Current		20.4/10.2 Amps		NEMA Design	BE
Service Factor		1.15		IP Rating	55
KVA Code		J		Insulation Class	H
Nominal Efficiency		89.2 %		Tropicalization	YES
Nominal Power Factor		0.92 cosθ		Duty	Cont.
Full Load Torque Ft-Lb		9.941494356 Ft-Lb		Cable Entry	M25 X 1.5
Temp Rise @ Full Load °C		36		Feet Removable	YES
Efficiency Level		IE3 - NEMA Premium		Double Drilled	NO
Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	231	8.74	Rated Altitude (M)	1000
Breakdown	-	338	-	Coating	7024 - Graphite Grey
Pull Up	-	182	-	Shaft Grounding	YES
125% of FL	2998.9	-	15.47	Brake Voltage (DC)	--
75% of FL	2999.5	-	7.5	Brake Torque (N-M)	--
50% of FL	2999.7	-	5.41	Mechanical Data	
No Load	--	-	2.6	Bearing DE Side	6308ZZ
Hazardous Location	Class 1, Div 2, Grp A,B,C,D			Bearing NDE Side	6208ZZ
				Moment of Inertia	-- kg.m2
				Noise Level	Per NEMA dB (A)
CT VFD Range		--	Loaded Torque Curves		--
P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosϕ = Power Factor					
Certifications	UL	CSA	DOE		
File Numbers	323353	224693	096A		
Wiring Diagram	3PH 9 Lead IEC Dual Voltage				
CONNECTION DIAGRAM U2 V2 W2 U3 V3 W3 U1 V1 W1 LOW VOLTAGE U2 V2 W2 U3 V3 W3 U1 V1 W1 HIGH VOLTAGE					

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

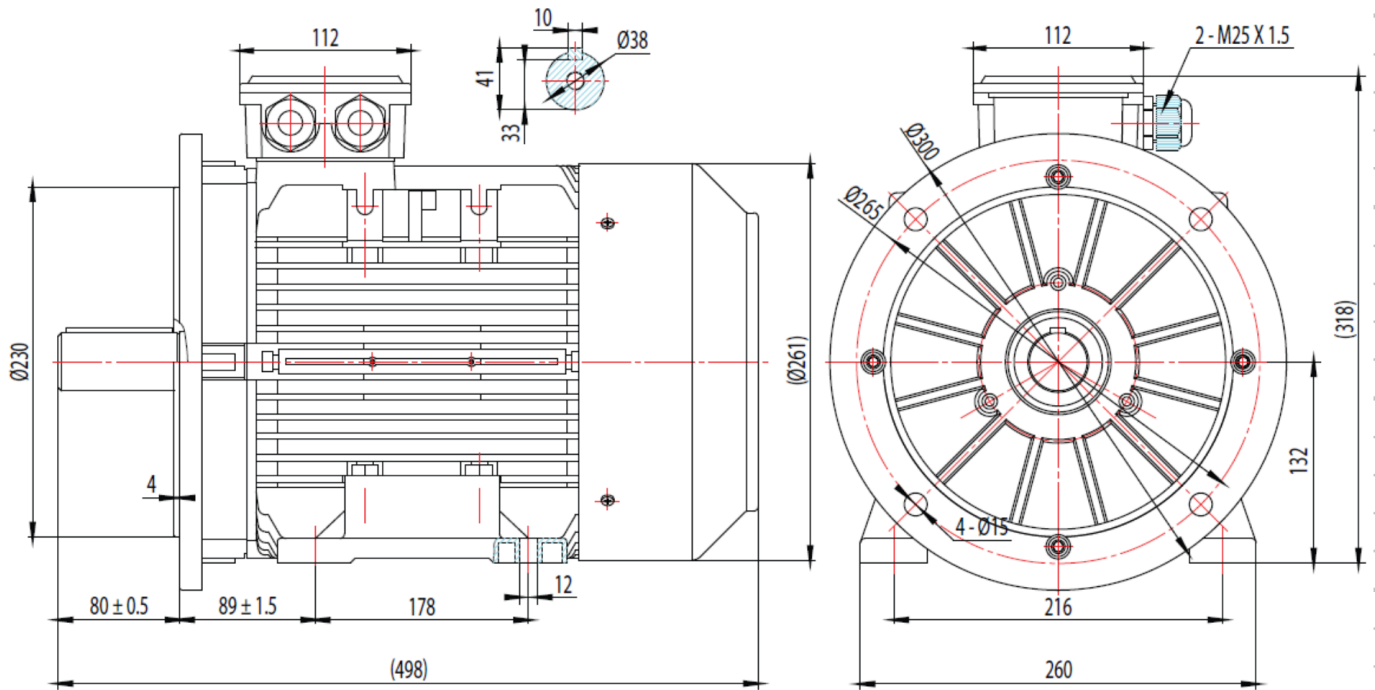

MODEL NUMBER	XR-132SB35-AL-TF	ISSUE DATE:	05/2025
DIMENSIONS	in		
CASTING MATERIAL	ALUMINUM	WWW.TECHTOPIND.COM	

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540