




Model Number XR3-CI-TF-213T-6-B-D-3-190|380-50

MFG PN T213T3U6B


List Price --

All data shown at HIGH voltage setting

Format STD 3 Phase

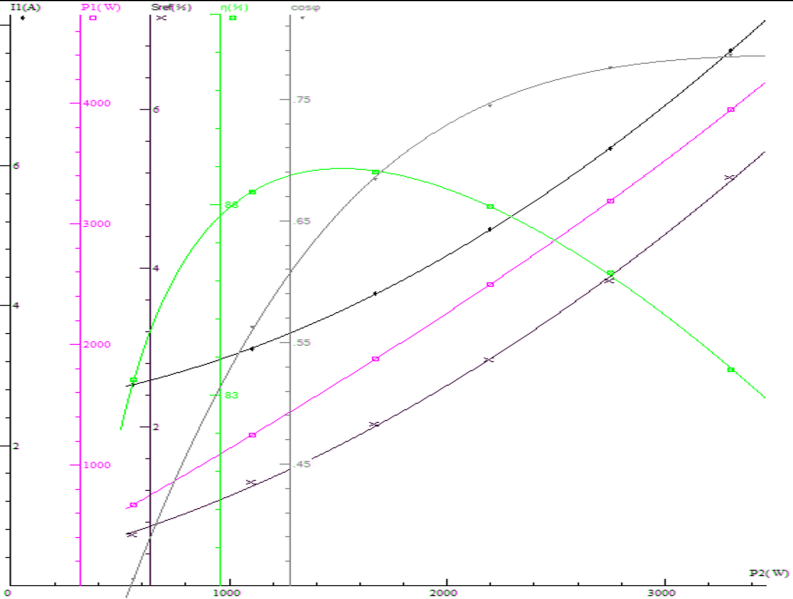Electrical Data				General Data	
Rated Motor Output Power		3 HP		Frame Size	213
Rated Motor Speed		965 r/min		Enclosure	TEFC
Rated Motor Voltage (3 Phase)		190 380-50 Volts - HZ		Approximate Weight	144
Rated Motor Current		10.2/5.1 Amps		NEMA Design	BE
Service Factor		1		IP Rating	55
KVA Code		H		Insulation Class	H
Nominal Efficiency		84.3 %		Tropicalization	YES
Nominal Power Factor		0.791 cosθ		Duty	Cont.
Full Load Torque Ft-Lb		15.9594512 Ft-Lb		Cable Entry	1.25
Temp Rise @ Full Load °C		38.5		Feet Removable	YES
Efficiency Level		IE3 - NEMA Premium		Double Drilled	NO
Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	186	27.999	Rated Altitude (M)	1000
Breakdown	-	235	-	Coating	7024 - Graphite Grey
Pull Up	-	127	-	Shaft Grounding	YES
125% of FL	961	-	6.25	Brake Voltage (DC)	--
75% of FL	980	-	4.13	Brake Torque (N-M)	--
50% of FL	987	-	3.38	Mechanical Data	
No Load	1000	-	2.71	Bearing DE Side	6308ZZ
Hazardous Location	Class 1, Div 2, Grp A,B,C,D			Bearing NDE Side	6308ZZ
				Moment of Inertia	-- kg.m2
				Noise Level	Per NEMA dB (A)
				--	
CT VFD Range		--	Loaded Torque Curves		--
		P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosϕ = Power Factor			
Certifications	UL	CSA	DOE		
File Numbers	323353	224693	096A		
Wiring Diagram	3PH 9 Lead Dual Voltage				
3 Phase - YY/Y - 9 Lead 4,1 Blue / 5,2 White / 6,3 Org / 7 Yl / 8 Blk / 9 RD Cast Iron- 1,2,3 Top - 4,5,6,7,8,9 Bottom Aluminum - 4,5,6,8,9 Top - 1,2,3,7 Bottom CONNECTIONS 4 5 6 7 8 9 1 2 3 LOW VOLTAGE 4 5 6 7 8 9 1 2 3 HIGH VOLTAGE					

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

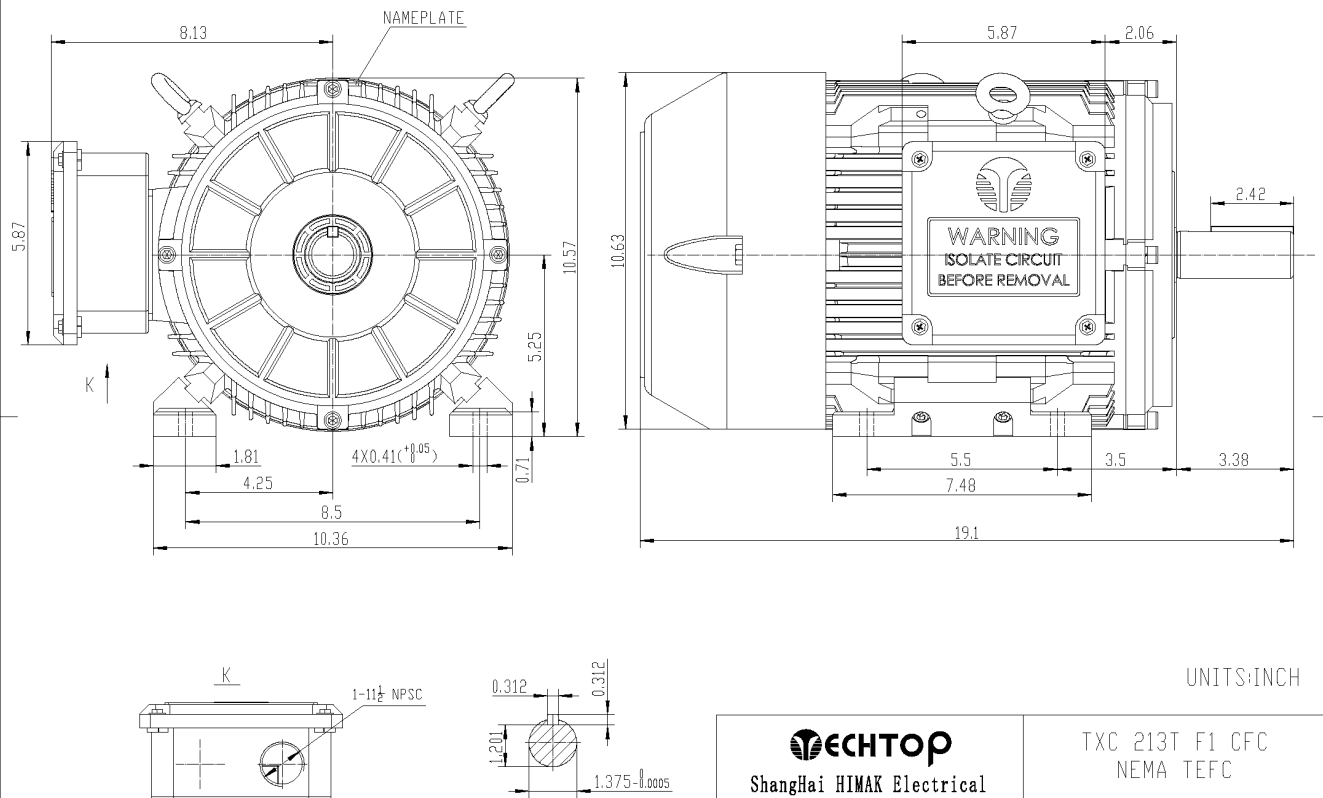

UNITS: INCH

TECHTOP ShangHai HIMAK Electrical Machinery CO., LTD		TXC 213T F1 CFC NEMA TEFC	
		NO:	CY217.A16.001C
Design	Standard	STEP MARK	1:2.5 SORT Cast iron Motor
Checker	Allow		
Auditing	Date		