



Model Number XR3-CI-TF-326TC-4-BR-D-50-190|380-50

MFG PN T326T50U4B

List Price --

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data

General Data

Rated Motor Output Power	50 HP	Frame Size	326
Rated Motor Speed	1470 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	190 380-50 Volts - HZ	Approximate Weight	581.4
Rated Motor Current	136.8/68.4 Amps	NEMA Design	BE
Service Factor	1	IP Rating	55
KVA Code	J	Insulation Class	H
Nominal Efficiency	93.9 %	Tropicalization	YES
Nominal Power Factor	0.882 cos θ	Duty	Cont.
Full Load Torque Ft-Lb	176.957616 Ft-Lb	Cable Entry	1.25
Temp Rise @ Full Load °C	90	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO



Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	188	394.8	Rated Altitude (M)	1000
Breakdown	-	240	-	Coating	7024 - Graphite Grey
Pull Up	-	141	-	Shaft Grounding	YES
125% of FL	1463	-	86.55	Brake Voltage (DC)	--
75% of FL	1480	-	52	Brake Torque (N-M)	--
50% of FL	1487	-	37.72	Mechanical Data	
No Load	1497	-	21.3	Bearing DE Side	6312 C3

Hazardous Location	Class 1, Div 2, Grp A,B,C,D	Bearing NDE Side	6312 C3
		Moment of Inertia	-- kg.m2
		Noise Level	Per NEMA dB (A)




CT VFD Range	--	Loaded Torque Curves	--
P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cos ϕ = Power Factor			

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A

Wiring Diagram	3PH 12 Lead Dual Voltage
----------------	--------------------------

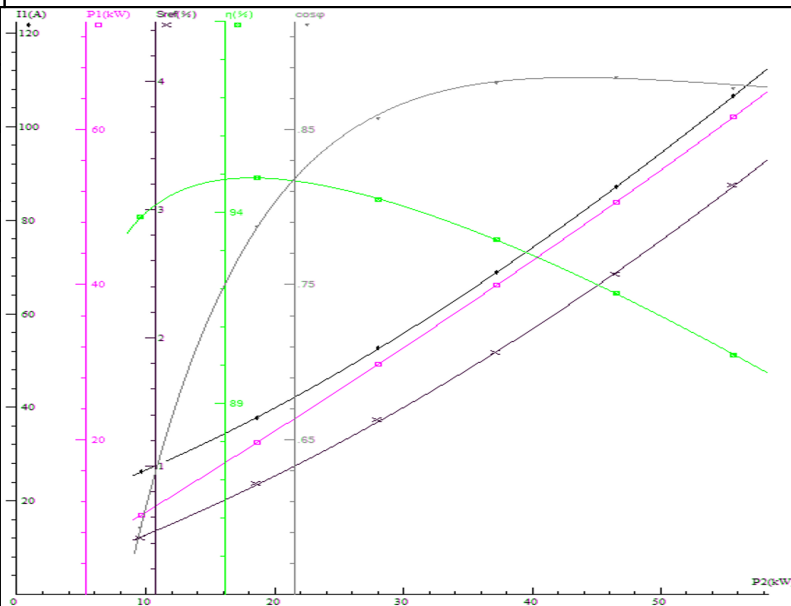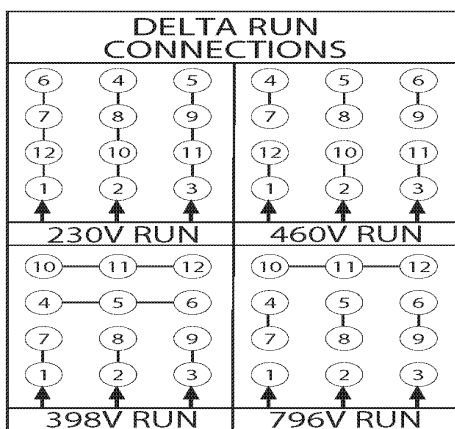

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

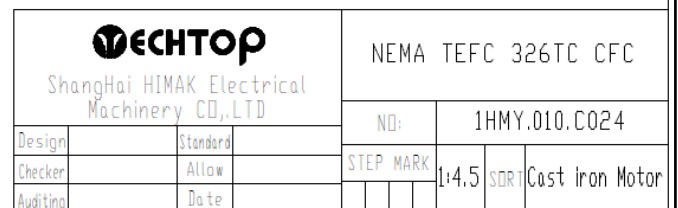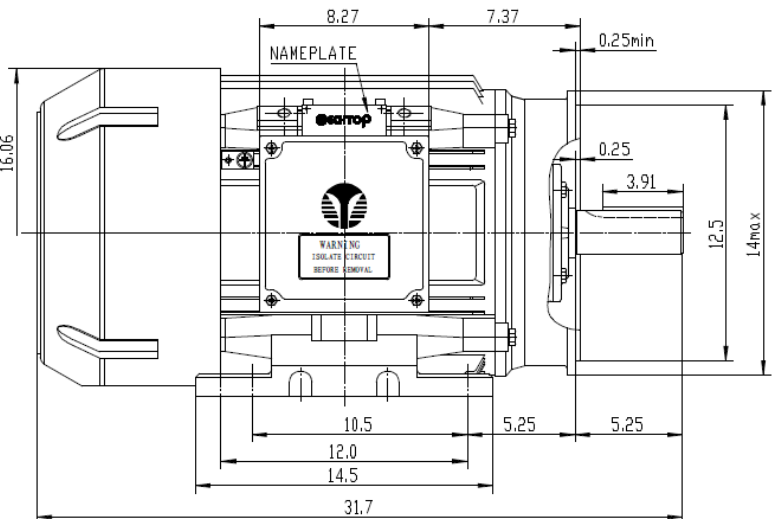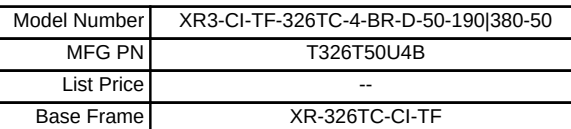

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540