

Distributed by Gross Automation.

Please call +1 (262) 252-1600 or email sales@grossautomation.com.



PRODUCT GUIDE



GROSS
AUTOMATION

Distributed by Gross Automation.

Please call +1 (262) 252-1600 or email sales@grossautomation.com.

Industrial Data Communications Heritage

Produced by:

Westermo Network
Technologies AB

Photo:

IStockphoto,
BildN, Västerås, Sweden

Illustrations:

Visual Information Sweden AB
Eskilstuna, Sweden

*Specifications are subject to
change without notice due to
continuous product develop-
ment and improvement.*

Westermo was established in 1975. The head office is located 150 km (95 miles) southwest of Stockholm, Sweden. Over the years, Westermo has grown with subsidiaries being established in Sweden, Finland, UK, Germany, France, Singapore, Taiwan, North America and Australia as well as sales partners appointed in over 35 countries worldwide.

The first Westermo data communications product was an RS-232 line driver, the KM-1, that allowed data to be transmitted over great distances using twisted pair cables. Today we still sell a product, the MD-12, that is plug compatible with this device.

In the 1990s, Westermo created the world's first industrial DIN rail mount telephone modem, the TD-22, pioneering remote access solutions for industrial devices like PLCs and HMIs.



Swedish Engineering Excellence

Westermo provides a full range of data communications solutions for demanding applications in industries that include transport, water and energy markets. Since 1975 we have been at the forefront of technological development and continue to push the limits of what is technically possible.

We offer the highest levels of service to help our customers to select, configure and install the right solution for their needs. Our experience and expertise goes far beyond our own product range, so that regardless of whether your installation is in a substation, water treatment plant or alongside a railway, we understand the specific demands and are able to provide the right advice.

Made in Sweden

To ensure the highest quality, all Westermo products are manufactured in our own state of the art industrial electronics manufacturing facility in Sweden.

For more information about products and services from Westermo, please visit our website at www.westermo.com

Contents

<i>Ethernet Switches</i>	4 - 17
<i>Extenders</i>	20 - 23
<i>Routers</i>	24 - 27
<i>Modems</i>	28 - 31
<i>Converters</i>	32 - 35
<i>Accessories</i>	36 - 40





Ethernet switches

- Managed Ethernet Switches
- Unmanaged Ethernet Switches
- Managed PoE Ethernet Switches
- Unmanaged PoE Ethernet Switches










Robust Ethernet switches that can withstand all industrial environments

Our industrial Ethernet switches are designed for use in harsh environments and allow you to build cost-effective, reliable, secure networks. Whether you require an unmanaged switch for a point-to-point link, a managed switch for redundancy or a layer 3 switch for network routing, we have the ideal solution, regardless of the environment. Our extensive range of switches are used in train, railway, energy, utilities and road applications.

Managed Ethernet Switches







Product/Art. no	Description
L105-S1 3643-0210 	Managed Industrial Device Server Switch 4 x 10/100 Mbit/s, Ethernet TX, RJ-45 1 x Digital I/O 1 x 50 bit/s to 115.2 kbit/s, RS-232, RJ-45 1 x USB 1 x 2.5 mm jack, console Operating voltage: 19-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
L205-S1 3643-0215 	Managed Industrial Device Server Switch 4 x 10/100 Mbit/s, Ethernet TX, RJ-45 1 x Digital I/O 1 x 50 bit/s to 115.2 kbit/s, RS-232, RJ-45 1 x 50 bit/s to 115.2 kbit/s, RS-232 or 50 bit/s to 2 Mbit/s, RS-422/485, RJ-45 1 x USB 1 x 2.5 mm jack, console Operating voltage: 19-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
L106-S2 3643-0220 	Managed Industrial Device Server Switch 4 x 10/100 Mbit/s, Ethernet TX, RJ-45 2 x 100/1000 Mbit/s, pluggable connections transceivers supported, Ethernet FX or TX, SFP 1 x Digital I/O 1 x 50 bit/s to 115.2 kbit/s, RS-232, RJ-45 1 x 50 bit/s to 115.2 kbit/s, RS-232 or 50 bit/s to 2 Mbit/s, RS-422/485, RJ-45 1 x USB 1 x 2.5 mm jack, console Operating voltage: 19-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
L206-S2 3643-0225 	Managed Industrial Device Server Switch 4 x 10/100 Mbit/s, Ethernet TX, RJ-45 2 x 100/1000 Mbit/s, pluggable connections transceivers supported, Ethernet FX or TX, SFP 1 x Digital I/O 1 x 50 bit/s to 115.2 kbit/s, RS-232, RJ-45 1 x 50 bit/s to 115.2 kbit/s, RS-232 or 50 bit/s to 2 Mbit/s, RS-422/485, RJ-45 1 x USB 1 x 2.5 mm jack, console Operating voltage: 9.8-36 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
L108-F2G-S2 3643-0200 	Managed Industrial Device Server Switch 4 x 10/100 Mbit/s, Ethernet TX, RJ-45 2 x 100/1000 Mbit/s, pluggable connections transceivers supported, Ethernet FX or TX, SFP 1 x Digital I/O 1 x 50 bit/s to 115.2 kbit/s, RS-232, RJ-45 1 x 50 bit/s to 115.2 kbit/s, RS-232 or 50 bit/s to 2 Mbit/s, RS-422/485, RJ-45 1 x USB 1 x 2.5 mm jack, console Operating voltage: 19-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
L208-F2G-S2 3643-0205 	Managed Industrial Device Server Switch 4 x 10/100 Mbit/s, Ethernet TX, RJ-45 2 x 100/1000 Mbit/s, pluggable connections transceivers supported, Ethernet FX or TX, SFP 1 x Digital I/O 1 x 50 bit/s to 115.2 kbit/s, RS-232, RJ-45 1 x 50 bit/s to 115.2 kbit/s, RS-232 or 50 bit/s to 2 Mbit/s, RS-422/485, RJ-45 1 x USB 1 x 2.5 mm jack, console Operating voltage: 19-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
L108-F2G-S2-12VDC 3643-0240 	Managed Industrial Device Server Switch 4 x 10/100 Mbit/s, Ethernet TX, RJ-45 2 x 100/1000 Mbit/s, pluggable connections transceivers supported, Ethernet FX or TX, SFP 1 x Digital I/O 1 x 50 bit/s to 115.2 kbit/s, RS-232, RJ-45 1 x 50 bit/s to 115.2 kbit/s, RS-232 or 50 bit/s to 2 Mbit/s, RS-422/485, RJ-45 1 x USB 1 x 2.5 mm jack, console Operating voltage: 9.8-36 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)






Product/Art. no	Description
<p>L106-F2G 3643-0230</p> <p>L206-F2G 3643-0235</p> <p>L206-F2G-EX 3643-5235</p> 	<p>Managed Industrial Switch 4 × 10/100 Mbit/s, Ethernet TX, RJ-45 2 × 100/1000 Mbit/s, pluggable connections transceivers supported, Ethernet FX or TX, SFP 1 × Digital I/O 1 × USB 1 × 2.5 mm jack, console Operating voltage: 19-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)</p>
<p>L110-F2G 3643-0100</p> <p>L210-F2G 3643-0105</p> <p>L210-F2G-EX 3643-5105</p> 	<p>Managed Industrial Switch 8 × 10/100 Mbit/s, Ethernet TX, RJ-45 2 × 100/1000 Mbit/s, pluggable connections transceivers supported, Ethernet FX or TX, SFP 1 × Digital I/O 1 × 2.5 mm jack, console Operating voltage: 19-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)</p>
<p>L110-F2G-12VDC 3643-0110</p> <p>L210-F2G-12VDC 3643-0115</p> 	<p>Managed Industrial Switch 8 × 10/100 Mbit/s, Ethernet TX, RJ-45 2 × 100/1000 Mbit/s, pluggable connections transceivers supported, Ethernet FX or TX, SFP 1 × Digital I/O 1 × 2.5 mm jack, console Operating voltage: 9.6-60 VDC Operating temperature: -40 to +74 °C (-40 to +165 °F)</p>
<p>Lynx-5512-F4G-T8G-LV 3643-0300</p> <p>Lynx-5512-E-F4G-T8G-LV 3643-0305</p> 	<p>Managed Industrial Switch 8 × 10/100/1000 Mbit/s, Ethernet TX, RJ-45 4 × 100/1000 Mbit/s, SFP 1 × Digital I/O 1 × micro USB, console Operating voltage: 8.4-60 VDC Operating temperature: -40 to +74 °C (-40 to +165 °F)</p>



Product/Art. no	Description
<p>RFI-111-F4G-T7G 3641-4315</p>  <p>RFI-211-F4G-T7G 3641-4310</p> <p>RFI-211-F4G-T7G-EX 3641-5310</p>	<p>Managed Industrial Switch 7 × 10/100/1000 Mbit/s, Gigabit Ethernet TX, RJ-45 4 × 100/1000 Mbit/s, pluggable connections transceivers supported, Ethernet FX or TX, SFP 1 × Digital I/O 1 × Micro USB, console 1 × USB Operating voltage: 16-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)</p>
<p>RFI-119-F4G-T7G 3641-4305</p>  <p>RFI-219-F4G-T7G 3641-4300</p> <p>RFI-219-F4G-T7G-EX 3641-5300</p>	<p>Managed Industrial Switch 8 × 10/100 Mbit/s, Ethernet TX, RJ-45 7 × 10/100/1000 Mbit/s, Gigabit Ethernet TX, RJ-45 4 × 100/1000 Mbit/s, pluggable connections transceivers supported, Ethernet FX or TX, SFP 1 × Digital I/O 1 × Micro USB, console 1 × USB Operating voltage: 16-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)</p>
<p>RFI-207-F4G-T3G 3641-4210</p>  <p>RFI-207-F4G-T3G-EX 3641-5210</p>	<p>Managed Industrial Switch 3 × 10/100/1000 Mbit/s, Ethernet TX, RJ-45 4 × 100/1000 Mbit/s, pluggable connections transceivers supported, Ethernet FX or TX, SFP 1 × Digital I/O 1 × Micro USB, console 1 × USB Operating voltage: 16-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)</p>
<p>RFI-211-T3G 3641-4110</p>  <p>RFI-211-T3G-EX 3641-5110</p>	<p>Managed Industrial Switch 3 × 10/100/1000 Mbit/s, Ethernet TX, RJ-45 8 × 10/100 Mbit/s, Ethernet TX, RJ-45 1 × Digital I/O 1 × Micro USB, console 1 × USB Operating voltage: 16-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)</p>



Product/Art. no	Description
<p>RFI-215-F4G-T3G 3641-4200</p>  <p>RFI-215-F4G-T3G-EX 3641-5200</p>	<p>Managed Industrial Switch 3 × 10/100/1000 Mbit/s, Ethernet TX, RJ-45 8 × 10/100 Mbit/s, Ethernet TX, RJ-45 4 × 100/1000 Mbit/s, pluggable connections transceivers supported, Ethernet FX or TX, SFP 1 × Digital I/O 1 × Micro USB, console 1 × USB Operating voltage: 16-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)</p>
<p>RFI-219-T3G 3641-4100</p>  <p>RFI-219-T3G-EX 3641-5100</p>	<p>Managed Industrial Switch 3 × 10/100/1000 Mbit/s, Ethernet TX, RJ-45 16 × 10/100 Mbit/s, Ethernet TX, RJ-45 1 × Digital I/O 1 × Micro USB, console 1 × USB Operating voltage: 16-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)</p>
<p>RFI-219-F4G-T7G-F8 3641-4320</p>  <p>RFI-219-F4G-T7G-F8-EX 3641-5320</p>	<p>Managed Industrial Switch 7 × 10/100/1000 Mbit/s, Gigabit Ethernet TX, RJ-45 4 × 100/1000 Mbit/s, pluggable connections transceivers supported, Ethernet FX or TX, SFP 8 × 100 Mbit/s, pluggable connections transceivers supported, Ethernet FX or TX, SFP 1 × Digital I/O 1 × Micro USB, console 1 × USB Operating voltage: 16-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)</p>



Product/Art. no	Description
 <p>RedFox-5528-F4G-T24G-MV 3641-4515</p> <p>RedFox-5528-E-F4G-T24G-MV 3641-4415</p> <p>RedFox-5528-F4G-T24G-LV 3641-4510</p> <p>RedFox-5528-E-F4G-T24G-LV 3641-4410</p>	<p>Managed Industrial Switch 24 × 10/100/1000 Mbit/s, Ethernet TX, RJ-45 4 × 100/1000 Mbit/s, SFP 1 × Digital I/O 1 × Micro USB, console 1 × Micro SD Operating voltage: LV 18-60 VDC, HV 36-154 VDC Operating temperature: -40 to +74 °C (-40 to +165 °F)</p>
 <p>RedFox-5528-F16G-T12G-MV 3641-4525</p> <p>RedFox-5528-E-F16G-T12G-MV 3641-4425</p> <p>RedFox-5528-F16G-T12G-LV 3641-4520</p> <p>RedFox-5528-E-F16G-T12G-LV 3641-4420</p>	<p>Managed Industrial Switch 12 × 10/100/1000 Mbit/s, Ethernet TX, RJ-45 16 × 100/1000 Mbit/s, SFP 1 × Digital I/O 1 × Micro USB, console 1 × Micro SD Operating voltage: LV 18-60 VDC, HV 36-154 VDC Operating temperature: -40 to +74 °C (-40 to +165 °F)</p>
 <p>RedFox-5528-T28G-MV 3641-4505</p> <p>RedFox-5528-E-T28G-MV 3641-4405</p> <p>RedFox-5528-T28G-LV 3641-4500</p> <p>RedFox-5528-E-T28G-LV 3641-4400</p>	<p>Managed Industrial Switch 28 × 10/100/1000 Mbit/s, Ethernet TX, RJ-45 1 × Digital I/O 1 × Micro USB, console 1 × Micro SD Operating voltage: LV 18-60 VDC, HV 36-154 VDC Operating temperature: -40 to +74 °C (-40 to +165 °F)</p>




Product/Art. no	Description
 <p>RFIR-127-F4G-T7G-AC 3641-4030</p> <p>RFIR-127-F4G-T7G-DC 3641-4020</p> <p>RFIR-227-F4G-T7G-AC 3641-4035</p> <p>RFIR-227-F4G-T7G-DC 3641-4025</p>	<p>Managed Industrial Switch 7 × 10/100/1000 Mbit/s, Ethernet TX, RJ-45 4 × 100/1000 Mbit/s, pluggable connections transceivers supported, Ethernet FX or TX, SFP 16 × 10/100 Mbit/s, Ethernet FX, RJ-45 1 × Digital I/O 1 × Micro USB, console 1 × USB Operating voltage: 16-60 or 100-240 VAC Operating temperature AC: -40 to +55 °C (-40 to +131 °F) Operating temperature DC: -40 to +70 °C (-40 to +158 °F)</p>
 <p>RFIR-219-F4G-T7G-AC 3641-4015</p> <p>RFIR-219-F4G-T7G-DC 3641-4005</p>	<p>Managed Industrial Switch 7 × 10/100/1000 Mbit/s, Ethernet TX, RJ-45 4 × 100/1000 Mbit/s, pluggable connections transceivers supported, Ethernet FX or TX, SFP 8 × 10/100 Mbit/s, Ethernet FX, RJ-45 1 × Digital I/O 1 × Micro USB, console 1 × USB Operating voltage: 16-60 or 100-240 VAC Operating temperature AC: -40 to +55 °C (-40 to +131 °F) Operating temperature DC: -40 to +70 °C (-40 to +158 °F)</p>
<p>RFR-212-FB 3641-1640</p> 	<p>Managed EN 50155 Backbone Switch 12 × 10/100 Mbit/s, Ethernet TX, M12 Dual by-pass relays 1 × M12 USB configuration plug Operating voltage: 16.8-143 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)</p>



**Viper**

Product/Art. no		Description
Viper-408 3641-0360		Managed EN 50155 Switch 8 x 10/100 Mbit/s, Ethernet TX, M12 Operating voltage: 16.8-143 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
Viper-408 with E-mark 3641-6360		
Viper-112A 3635-0010		Managed EN 50155 Switch 12 x 10/100 Mbit/s, Ethernet TX, M12 1 x USB
Viper-212A 3635-0020		1 x console port, RS-232 Operating voltage: 16.8-143 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
Viper-112A-T3G 3635-0310		Managed EN 50155 Switch 9 x 10/100 Mbit/s, Ethernet TX, M12 3 x 10/100/1000 Mbit/s, Ethernet TX, M12
Viper-212A-T3G 3635-0320		1 x USB 1 x console port, RS-232 Operating voltage: 16.8-143 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
Viper-112A-T5G 3635-0610		Managed EN 50155 Switch 7 x 10/100 Mbit/s, Ethernet TX, M12 5 x 10/100/1000 Mbit/s, Ethernet TX, M12
Viper-212A-T5G 3635-0620		1 x USB 1 x console port, RS-232 Operating voltage: 16.8-143 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
Viper-120A 3635-0910		Managed EN 50155 Switch 20 x 10/100 Mbit/s, Ethernet TX, M12 1 x USB
Viper-220A 3635-0920		1 x console port, RS-232 Operating voltage: 16.8-143 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
Viper-120A-T4G 3635-1210		Managed EN 50155 Switch 16 x 10/100 Mbit/s, Ethernet TX, M12 4 x 10/100/1000 Mbit/s, Ethernet TX, M12
Viper-220A-T4G 3635-1220		1 x USB 1 x console port, RS-232 Operating voltage: 16.8-143 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
Viper-208-T4G-TBN 3635-2020		Managed EN 50155 Backbone Switch 4 x 1000 Mbit/s 4 x 100 Mbit/s 1 x USB
		1 x console port, RS-232 Operating voltage: 16.8-143 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
Viper-208-T8G-TBN 3635-2120		Managed EN 50155 Backbone Switch 8 x 1000 Mbit/s 1 x USB
		1 x console port, RS-232 Operating voltage: 16.8-143 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)







Unmanaged Ethernet Switches

Product/Art. no	Description
SDW-500-series 3644-xxxx 	Unmanaged Industrial 5-port Switch SDW-532 3 × 10/100 Mbit/s, Ethernet TX, RJ-45 2 × 100 Mbit/s, Ethernet FX, LC or SC connector Operating voltage: 9.6-57.6 VDC Operating temperature: -25 °C to +70 °C (-13 °F to +158 °F) SDW-541 4 × 10/100 Mbit/s, Ethernet TX, RJ-45 1 × 100 Mbit/s, Ethernet FX, LC or SC connector Operating voltage: 9.6-57.6 VDC Operating temperature: -25 °C to +70 °C (-13 °F to +158 °F) SDW-541-F1G-T4G 4 × 10/100/1000 Mbit/s, Ethernet TX, RJ-45 1 × 100/1000 Mbit/s, Ethernet FX, SFP Operating voltage: 9.6-57.6 VDC Operating temperature: -40 to +74 °C (-40 to +165 °F) SDW-550 5 × 10/100 Mbit/s, Ethernet TX, RJ-45 Operating voltage: 9.6-57.6 VDC Operating temperature: -25 to +70 °C (-13 to +158 °F) SDW-550-T5G 5 × 10/100/1000 Mbit/s, Ethernet TX, RJ-45 Operating voltage: 9.6-57.6 VDC Operating temperature: -40 to +74 °C (-40 to +165 °F)









Product/Art. no	Description
Viper-008 3641-0340 	Unmanaged EN 50155 Switch 8 × 10/100 Mbit/s, Ethernet TX, M12 Operating voltage: 16.8-143 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
Viper-012 3641-0540 	Unmanaged EN 50155 Switch 12 × 10/100 Mbit/s, Ethernet TX, M12 Operating voltage: 16.8-143 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)



i-line

Product/Art. no.		Description
SDI-541-MM-SC2 3625-0001		Unmanaged 5-port Fibre Switch 4 x 10/100 Mbit/s, Ethernet TX, RJ-45 1 x 100 Mbit/s, Ethernet FX, Multi-mode 2 km, SC connector 1 x Power/Relay, 4-pin terminal block Operating voltage: 18-32 VDC or 18-27 VAC Operating temperature: -10 to +60 °C (+14 to +140 °F)
SDI-541-SM-SC30 3625-0010		Unmanaged 5-port Fibre Switch 4 x 10/100 Mbit/s, Ethernet TX, RJ-45 1 x 100 Mbit/s, Ethernet FX, Single-mode 30 km, SC connector 1 x Power/Relay, 4-pin terminal block Operating voltage: 18-32 VDC or 18-27 VAC Operating temperature: -10 to +60 °C (+14 to +140 °F)
SDI-550 3625-0050		Unmanaged 5-port Switch 5 x 10/100 Mbit/s, Ethernet TX, RJ-45 1 x Power/Relay, 4-pin terminal block Operating voltage: 18-32 VDC or 18-27 VAC Operating temperature: -25 to +70 °C (-13 to +158 °F)
SDI-862-MM-SC2 3625-0110		Unmanaged 8-port Fibre Switch 6 x 10/100 Mbit/s, Ethernet TX, RJ-45 2 x 100 Mbit/s, Ethernet FX, Multi-mode 2 km, SC connector 1 x Alarm relay, terminal block connector with 1 A @ DC 24 V carry ability Operating voltage: 10-60 VDC Operating temperature: -10 to +70 °C (+14 to +158 °F)
SDI-862-SM-SC30 3625-0120		Unmanaged 8-port Fibre Switch 6 x 10/100 Mbit/s, Ethernet TX, RJ-45 2 x 100 Mbit/s, Ethernet FX, Single-mode 30 km, SC connector 1 x Alarm relay, terminal block connector with 1 A @ DC 24 V carry ability Operating voltage: 10-60 VDC Operating temperature: -10 to +70 °C (+14 to +158 °F)
SDI-880 3625-0100		Unmanaged 8-port Switch 8 x 10/100 Mbit/s, Ethernet TX, RJ-45 1 x Alarm relay, terminal block connector with 1 A @ DC 24 V carry ability Operating voltage: 10-60 VDC Operating temperature: -25 to +70 °C (-13 to +158 °F)


Managed PoE Ethernet Switches

 	
Product/Art. no	Description
Viper-112A-P8-HV 3635-0110  Viper-112A-P8-LV 3635-0210 Viper-212A-P8-HV 3635-0120 Viper-212A-P8-LV 3635-0220	Managed EN 50155 PoE Switch 12 x 10/100 Mbit/s, Ethernet TX, M12 (8 with PoE capability) 1 x USB 1 x console port, RS-232 Operating voltage HV: 33.6-143 VDC Operating voltage LV: 16.8-49.4 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
Viper-112A-T3G-P8-HV 3635-0410  Viper-112A-T3G-P8-LV 3635-0510 Viper-212A-T3G-P8-HV 3635-0420 Viper-212A-T3G-P8-LV 3635-0520	Managed EN 50155 PoE Switch 9 x 10/100 Mbit/s, Ethernet TX, M12 (8 with PoE capability) 3 x 10/100/1000 Mbit/s, Ethernet TX, M12 1 x USB 1 x console port, RS-232 Operating voltage HV: 33.6-143 VDC Operating voltage LV: 16.8-49.4 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
Viper-112A-T5G-P8-HV 3635-0710  Viper-112A-T5G-P8-LV 3635-0810	Managed EN 50155 PoE Switch 7 x 10/100 Mbit/s, Ethernet TX, M12 (8 with PoE capability) 5 x 10/100/1000 Mbit/s, Ethernet TX, M12 1 x USB 1 x console port, RS-232 Operating voltage HV: 33.6-143 VDC Operating voltage LV: 16.8-49.4 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
Viper-212A-T5G-P8-HV 3635-0720  Viper-212A-T5G-P8-LV 3635-0820	Managed EN 50155 PoE Switch 7 x 10/100 Mbit/s, Ethernet TX, M12 (8 with PoE capability) 5 x 10/100/1000 Mbit/s, Ethernet TX, M12 1 x USB 1 x console port, RS-232 Operating voltage HV: 33.6-143 VDC Operating voltage LV: 16.8-49.4 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)






Product/Art. no	Description
Viper-120A-P8-HV 3635-1010  Viper-120A-P8-LV 3635-1110 Viper-220A-P8-HV 3635-1020 Viper-220A-P8-LV 3635-1120	Managed EN 50155 PoE Switch 20 × 10/100 Mbit/s, Ethernet TX, M12 (8 with PoE capability) 1 × USB 1 × console port, RS-232 Operating voltage HV: 33.6-143 VDC Operating voltage LV: 16.8-49.4 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
Viper-120A-T4G-P8-HV 3635-1310  Viper-120A-T4G-P8-LV 3635-1410 Viper-220A-T4G-P8-HV 3635-1320 Viper-220A-T4G-P8-LV 3635-1420	Managed EN 50155 PoE Switch 16 × 10/100 Mbit/s, Ethernet TX, M12 (8 with PoE capability) 4 × 10/100/1000 Mbit/s, Ethernet TX, M12 1 × USB 1 × console port, RS-232 Operating voltage HV: 33.6-143 VDC Operating voltage LV: 16.8-49.4 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)



Product/Art. no.	Description
PMI-110-F2G 3626-0200 	Managed PoE Switch 8 × 10/100 Mbit/s Ethernet TX, RJ-45, PoE 2 × 10/100/1000 Mbit/s, Ethernet TX or 100/1000 Mbit/s, Ethernet FX, SFP combo ports Operating voltage: 46- 57 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)

Unmanaged PoE Ethernet Switches

i-line		
Product/Art. no.		Description
P11-2G 3626-0300 		Unmanaged Industrial 2-Port PoE Injector 2 × 10/100/1000 Mbit/s, Ethernet TX, RJ-45 2 × 10/100/1000 Mbit/s, Ethernet TX, RJ-45, PoE Operating voltage: 46-57 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
PSI-660G-24V 3626-0100 		Unmanaged PoE Booster Switch 4 × 10/100 Mbit/s Ethernet TX, RJ-45, PoE 2 × 10/100/1000 Mbit/s, Ethernet TX, RJ-45 Operating voltage: 12-24 VDC Operating temperature: -25 to +60 °C (-13 to +140 °F)
PSI-1010G-24V 3626-0110 		Unmanaged PoE Booster Switch 8 × 10/100 Mbit/s Ethernet TX, RJ-45, PoE 2 × 10/100/1000 Mbit/s, Ethernet TX, RJ-45 Operating voltage: 12-24 VDC Operating temperature: -25 to +60 °C (-13 to +140 °F)



Industrial cybersecurity

The threat of a sophisticated cyberattack on mission-critical infrastructure networks is increasing all the time. A successful attack on these networks can have a profound impact on our society, causing great economic loss or worse. At Westermo we recognize that to effectively defend against potential attacks, it is necessary to deliver more than just a product.

Westermo offers:

Technical expertise at your service

Benefit from our 40+ years of industry knowledge to ensure that your cybersecurity measures are appropriate to the application.



Strong supply chain security

Westermo products and software solutions are made in Sweden within a secure development lifecycle.



Rapid incident response

Our Product Security Incident Response Team (PSIRT) always monitors and rapidly responds to any vulnerability that could affect our products.



Simple network security configuration

Security configurations are made easy and reliable with WeOS and our site of network management tools.





Westermo quality and approvals

Westermo designs and manufactures robust data communication devices for harsh environments. We supply products that provide the communication infrastructure for control and monitoring systems, derived from proven commercial technology. These products are used in mission critical solutions, where commercial grade products are not sufficiently resilient.

To ensure the highest quality products, Westermo has a state-of-the-art industrial electronics manufacturing facility in Sweden. To maximise the reliability of the product, testing is carried out at many stages of the manufacturing process.

- ⌘ Manufacturing to IPC-A-610 under ISO9001-2008 QMS
- ⌘ Solder Paste Inspection and Automated Optical Inspection
- ⌘ X-ray examination and PCB testing
- ⌘ Functional testing
- ⌘ Burn-in testing to EN 50155



EN 61000-6-1
Residential Immunity



EN 61000-6-2
Industrial Immunity



EN 61000-6-3
Residential Emission



EN 61000-6-4
Industrial Emission



EN 50121-4
Railway Trackside



EN 50155
On Board Rail





Extenders

- Point-to-Point Ethernet Extenders
- Managed Network Ethernet Extenders





Extend your network far beyond the normal limits of Ethernet

Our industrial Wolverine series of industrial Ethernet extenders allow cost-effective Ethernet networks to be created over long distances, at high data rates. The SHDSL technology employed makes it possible to reuse many types of pre-existing cabling which in turn can lead to considerable financial savings. With support for multidrop networks, redundant rings, legacy serial connections and layer 3 routing functions, our range of Ethernet extenders can meet any demand the application requires.



Point-to-Point Ethernet Extenders






Product/Art. no	Description
DDW-120 3621-0110 	SHDSL Ethernet Extender 1 × 10/100 Mbit/s, Ethernet TX, RJ-45 1 × 192 kbit/s to 15.3 Mbit/s, DSL, 2 position detachable screw terminal 1 × 115.2 kbit/s, diagnostic port, 2.5 mm jack Operating voltage: 10-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
DDW-002-B1 3641-0900 	EN 50155 Ethernet Broadband Bridge 1 × 10/100 Mbit/s, Ethernet TX, RJ-45 1 × 2-wire interface up to 70 Mbit/s, distance up to 300 m Operating voltage: 16.8-143 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)

Managed Network Ethernet Extenders



Product/Art. no	Description
DDW-142 3642-0300 	Managed Industrial Ethernet Extender 2 × 10/100 Mbit/s, Ethernet TX, RJ-45 2 × 32 kbit/s to 15.3 Mbit/s (30.4 with bonding), SHDSL, 2-position detachable screw terminal 1 × 300 bit/s to 115.2 kbit/s, RS-232, RJ-45 1 × Digital I/O, 4-position detachable screw terminal 1 × USB 1 × 2.5 mm jack, console Operating voltage: 19-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
DDW-142-EX 3642-5300	
DDW-242 3642-0320	
DDW-142-12VDC 3642-0400 	Managed Industrial Ethernet Extender 2 × 10/100 Mbit/s, Ethernet TX, RJ-45 2 × 32 kbit/s to 15.3 Mbit/s (30.4 with bonding), SHDSL, 2-position detachable screw terminal 1 × 300 bit/s to 115.2 kbit/s, RS-232, RJ-45 1 × Digital I/O, 4-position detachable screw terminal 1 × USB 1 × 2.5 mm jack, console Operating voltage: 9.8-60 VDC Operating temperature: -40 to +74 °C (-40 to +165 °F)
DDW-242-12VDC 3642-0420	
DDW-142-12VDC-BP 3642-0440 	Managed Industrial Ethernet Extender with bypass relay 2 × 10/100 Mbit/s, Ethernet TX, RJ-45 2 × 32 kbit/s to 15.3 Mbit/s (30.4 with bonding), SHDSL, 2-position detachable screw terminal 1 × 300 bit/s to 115.2 kbit/s, RS-232, RJ-45 1 × Digital I/O, 4-position detachable screw terminal 1 × USB 1 × 2.5 mm jack, console Operating voltage: 9.8-60 VDC Operating temperature: -40 to +74 °C (-40 to +165 °F)



Product/Art. no	Description
DDW-142-485 3642-0310  DDW-242-485 3642-0330	Managed Industrial Ethernet Extender 2 × 10/100 Mbit/s, Ethernet TX, RJ-45 2 × 32 kbit/s to 15.3 Mbit/s (30.4 with bonding), SHDSL, 2-position detachable screw terminal 1 × 50 bit/s to 2Mbit/s, RS-422/485, 4-position detachable screw terminal 1 × Digital I/O, 4-position detachable screw terminal 1 × USB 1 × 2.5 mm jack, console Operating voltage: 19-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
DDW-225 3642-0250 	Managed Industrial Redundant Ring Ethernet Extender 4 × 10/100 Mbit/s, Ethernet TX, RJ-45 2 × 32 kbit/s to 15.3 Mbit/s, SHDSL, 2-position detachable screw terminal 1 × Digital I/O, 4-position detachable screw terminal 1 × USB 1 × 2.5 mm jack, console Operating voltage: 16-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
DDW-226 3642-0240 	Managed Industrial Ethernet Extender with Serial Support 4 × 10/100 Mbit/s, Ethernet TX, RJ-45 1 × 300 bit/s to 115.2 kbit/s, RS-232, 9-pin D-sub (male) 2 × 32 kbit/s to 15.3 Mbit/s, SHDSL 2-position detachable screw terminal 1 × Digital I/O, 4-position detachable screw terminal 1 × USB 1 × 2.5 mm jack, console Operating voltage: 16-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)



Routers




- Mobile/Cellular/Wireless Routers
- Broadband DSL Routers
- EN 50155 WLAN Routers




Multiple media solutions for accessing your remote networks

We provide a whole range of routers for use in demanding applications such as railways, water treatment, substation automation, roads and tunnels. We ensure that connections to your remote sites are resilient and reliable offering remote access solutions using DSL broadband and wireless 4G technologies. As we know security is of paramount concern, all industrial routers include a powerful firewall to prevent unauthorised access.

Mobile/Cellular/Wireless Routers

Product/Art. no	Description
MRD-405 3623-0501 	Industrial 4G LTE Gateway/Router GPRS/3G/HSPA/HSDPA/4G LTE 2 x 10/100 Mbit/s, Ethernet TX, RJ-45 1 x SIM slot Operating voltage: 10-36 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
MRD-415 3623-0515 	Industrial Cellular Router GSM/GPRS/EDGE/3G/HSPA/4G LTE 2 x 10/100 Mbit/s 1 x 300 bit/s to 115.2 kbit/s, RS-232 1 x SIM slot Operating voltage: 10-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
MRD-455 3623-0401 MRD-455-NA 3623-0601 	Industrial Mobile Broadband/4G Router GSM/GPRS/EDGE/3G/HSPA/4G LTE 2 x 10/100 Mbit/s, Ethernet TX, RJ-45 1 x 300 bit/s to 115.2 kbit/s, RS-232, D-sub 2 x SIM slot Operating voltage: 10-60 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)

Broadband DSL Routers

Product/Art. no	Description
BRD-355 3623-0311 	Industrial ADSL/VDSL Router/Modem ADSL/ADSL2/ADSL2+/VDSL2 router 2 x 10/100 Mbit/s, Ethernet TX, RJ-45 1 x 300 bit/s to 115.2 kbit/s, RS-232, DB-9 1 x ADSL, ADSL2/ASDL2+/VDSL2, RJ-11 Operating voltage: 10-48 VDC Operating temperature: -25 to +70 °C (-13 to +158 °F)

EN 50155 WLAN Routers

Product/Art. no		Description
RT-220-LV EU 3623-072201 RT-220-LV NA 3623-072202		EN 50155 WLAN 2x2 Client/Bridge/Access Point IEEE 802.11n 2x2 MIMO 2 x 10/100Base-T, 2 x M12 D-coded connectors Operating voltage: 24 VDC or IEEE 802.3at type 1 powered device Operating temperature: -40 to +70 °C (-40 to +158 °F)
RT-220-HV EU 3623-072301 RT-220-HV NA 3623-072302		EN 50155 WLAN 2x2 Client/Bridge/Access Point IEEE 802.11n 2x2 MIMO 2 x 10/100Base-T, 2 x M12 D-coded connectors Operating voltage: 72-110 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
RT-310 EU 3623-071001 RT-310 NA 3623-071002		EN 50155 WLAN Access Point IEEE 802.11n 3x3 MIMO 2 x 10/100/1000 Mbit/s Ethernet TX, M12 X-code Operating voltage: 24 VDC or IEEE 802.3at (PoE) Operating temperature: -40 to +70 °C (-40 to +158 °F)
RT-320-LV EU 3623-072001 RT-320-LV NA 3623-072002		EN 50155 WLAN 3x3 Client/Bridge/Access Point IEEE 802.11n 3x3 MIMO 2 x 10/100/1000 Mbit/s Ethernet TX, M12 X-code Operating voltage: 24 VDC or IEEE 802.3at (PoE) Operating temperature: -40 to +70 °C (-40 to +158 °F)
RT-320-HV EU 3623-072101 RT-320-HV NA 3623-072102		EN 50155 WLAN 3x3 Client/Bridge/Access Point IEEE 802.11n 3x3 MIMO 2 x 10/100/1000Base-T, 2 x M12 X-coded connectors Operating voltage: 72-110 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)
RT-370 3623-0770		Trackside WLAN Access Point IEEE 802.11n 3x3 MIMO + monitoring antenna 1 x 10/100/1000 Mbit/s Ethernet TX, M12 X-code 1 x Gbit/s Ethernet FX, ODC connector Operating voltage: 100-240 VAC Operating temperature: -40 to +70 °C (-40 to +158 °F)
RT-610-LV EU 3623-073001 RT-610-LV NA 3623-073002		EN 50155 WLAN Dual Radio Access Point IEEE 802.11ac 2 x 10/100/1000Base-T, 2 x M12 X-coded connectors Operating voltage: 24 VDC or IEEE 802.3at type 1 powered device Operating temperature: -40 to +70 °C (-40 to +158 °F)
RT-610-HV EU 3623-073101 RT-610-HV NA 3623-073102		EN 50155 WLAN Dual Radio Access Point IEEE 802.11ac 2 x 10/100/1000Base-T, 2 x M12 X-coded connectors Operating voltage: 72-110 VDC Operating temperature: -40 to +70 °C (-40 to +158 °F)



Modems



- Fibre Optic Modems
- Leased Line Modems
- Short Haul Modems
- Multidrop Modems




Industrial data modems for the harshest environments


We have a solution for you, whether the need is to communicate through a PSTN or ISDN line, across a private wire or leased line, down a fibre optic cable, or even over GSM/GPRS. Our wide range of industrial modems is designed for use in demanding applications such as railways, water treatment, substation automation, roads and tunnels. All our modems exceed industrial standards and ensure robust and reliable communications.

Fibre Optic Modems


RS-232/RS-485		
Product/Art. no		Description
ODW-720-F1 3651-0721		Point-to-Point Fibre Converter, RS-232 1 x Pluggable transceivers, SFP 1 x 300 bit/s to 250 kbit/s, RS-232, D-sub 1 x Detachable status screw terminal Operating voltage: 10-60 VDC or 20-30 VAC Operating temperature: -40 to +70 °C (-40 to +158 °F)
ODW-720-F2 3651-0722		Ring/Multidrop Fibre Converter, RS-232 2 x Pluggable transceivers, SFP 1 x 300 bit/s to 250 kbit/s, RS-232, D-sub 1 x Detachable status screw terminal Operating voltage: 10-60 VDC or 20-30 VAC Operating temperature: -40 to +60 °C (-40 to +140 °F)
ODW-730-F1 3651-0731		Point-to-Point Fibre Converter, RS-422/485 1 x Pluggable transceivers, SFP 1 x 300 bit/s to 1.5 Mbit/s, RS-422/485, D-sub 1 x Detachable status screw terminal Operating voltage: 10-60 VDC or 20-30 VAC Operating temperature: -40 to +70 °C (-40 to +158 °F)
ODW-730-F2 3651-0732		Ring/Multidrop Fibre Converter, RS-422/485 2 x Pluggable transceivers, SFP 1 x 300 bit/s to 1.5 Mbit/s RS-422/485, D-sub 1 x Detachable status screw terminal Operating voltage: 10-60 VDC or 20-30 VAC Operating temperature: -40 to +60 °C (-40 to +140 °F)
PROFIBUS		
Product/Art. no		Description
ODW-710-F1 3651-0711		Point-to-Point Fibre Converter, PROFIBUS 1 x Pluggable transceivers, SFP 1 x 9 600 bit/s to 12 Mbit/s, PROFIBUS DP (RS-485), D-sub 1 x Detachable status screw terminal Operating voltage: 10-60 VDC or 20-30 VAC Operating temperature: -40 to +70 °C (-40 to +158 °F)
ODW-710-F2 3651-0712		Ring/Multidrop Fibre Converter, PROFIBUS 2 x Pluggable transceivers, SFP 1 x 9 600 bit/s to 12 Mbit/s, PROFIBUS DP (RS-485), D-sub 1 x Detachable status screw terminal Operating voltage: 10-60 VDC or 20-30 VAC Operating temperature: -40 to +60 °C (-40 to +140 °F)

LONWORKS®	
Product/Art. no	Description
LRW-702-F2 3651-1401 	Fibre Optic Repeater for TP/FT-10 1 or 2 x 100 Mbit SFP transceivers 1 x 78.5 kbit/s, TP/FT-10 1 x 2-position detachable screw terminal Operating voltage: 10-60 VDC or 20-30 VAC Operating temperature: -40 to +60 °C (-40 to +140 °F)


Leased Line Modems


Leased Line	
Product/Art. no	Description
TD-23 3600-xxxx 	Multidrop Modem 1 x 300 bit/s to 115.2 kbit/s, RS-232 1 x 300 bit/s to 115.2 kbit/s, RS-422/485 1 x 300 bit/s to 1200 bit/s, Leased Line 1 x Detachable screw terminal, Relay (optional). Operating voltage: LV: 10-60 VDC 10-30 VAC, HV: 48-300 VDC, 85.5-264 VAC Operating temperature: -25 to +70 °C (-13 to +158 °F)

Short Haul Modems

RS-232, point-to-point	
Product/Art. no	Description
MD-12 3150-xxxx 	Short-Haul Modem, Point-to-Point 1 x Up to 38.4 kbit/s, RS-232, D-sub 1 x Up to 38.4 kbit/s, RS-232, detachable screw terminal 1 x ±10 mA balanced current loop, detachable screw terminal, Line connection Operating voltage: 12-36 VDC Operating temperature: +5 to +50 °C (+41 to +122 °F) -40 to +70 °C (-40 to +158 °F)

Multidrop Modems

RS-232, multidrop	
Product/Art. no	Description
LD-02 3156-0001 	Line Sharing Modem 1 x D-sub, up to 38.4 kbit/s, RS-232 1 x Up to 38.4 kbit/s, RS-232, detachable screw terminal 1 x Up to 38.4 kbit/s, RS-422/485, detachable screw terminal 1 x ±10 mA balanced current loop, detachable screw terminal, line connection Operating voltage: 12-36 VDC Operating temperature: +5 to +50 °C (+41 to +122 °F)

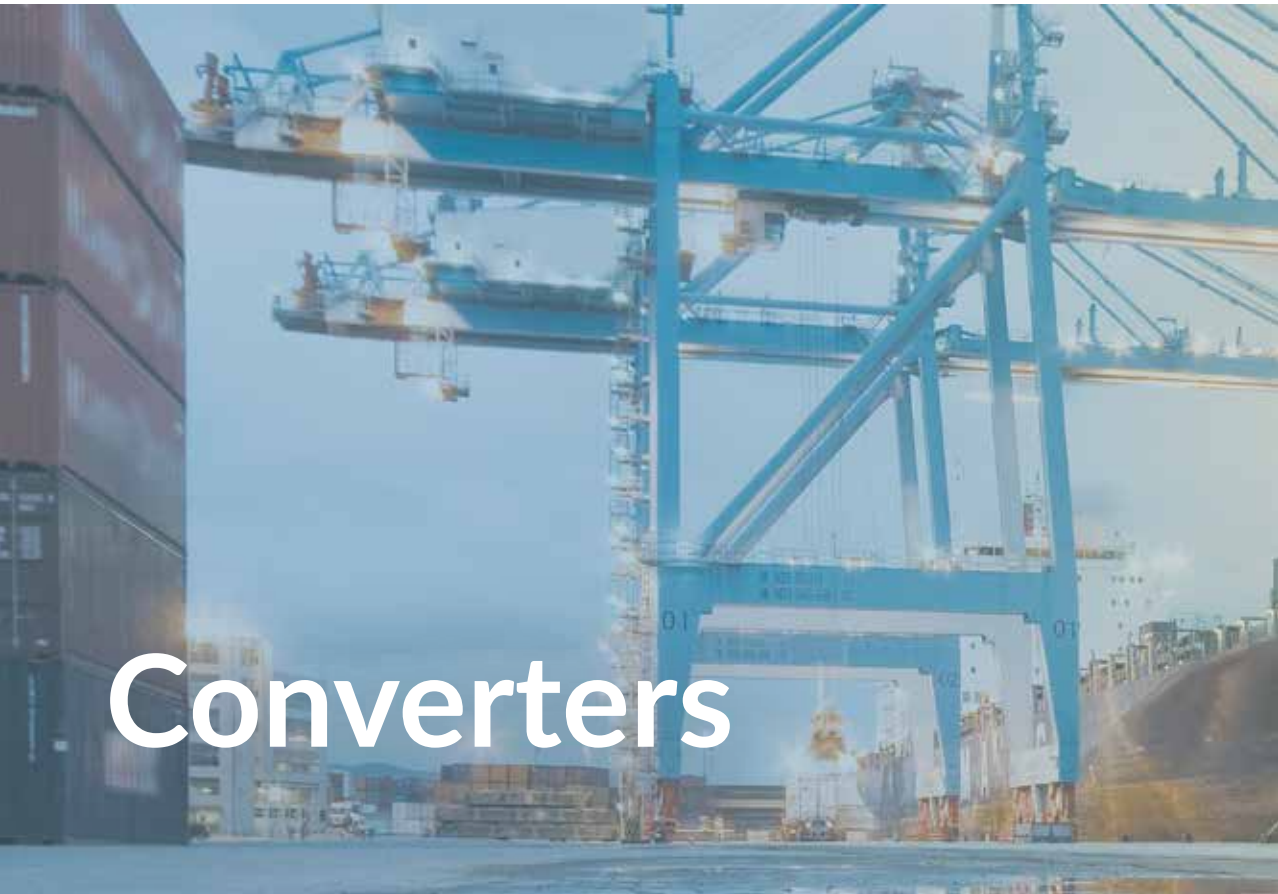





- Serial Converters/Repeaters
- Current Loop Converters
- Ethernet Media Converters
- Protocol Converters




Industrial converters for industrial protocols

Our range of converters and repeaters suits a whole host of industrial protocols and communication methods, including Ethernet, RS-232, RS-422, RS-485, PROFIBUS DP, M-Bus and 20 mA current loop. Westermo products are designed to operate in the harshest industrial environments and provide robust, reliable communications for peace of mind, whether a fibre media converter for an Ethernet link, a serial converter, or a repeater for an RS-485 network is needed.



Serial Converters/Repeaters

Product/Art. no		Description
EDW-100 3616-0020		Serial Adapter 1 × 10/100 Mbit/s, Ethernet TX, RJ-45 1 × 300 bit/s to 115.2 kbit/s, RS-232, D-sub 1 × 300 bit/s to 115.2 kbit/s, RS-422/485, detachable screw terminal Operating voltage: 10-60 VDC Operating temperature: -25 to +70 °C (-13 to +158 °F)
EDW-120 3616-0010		Serial Adapter 1 × 10/100 Mbit/s, Ethernet TX, RJ-45 2 × 300 bit/s to 115.2 kbit/s, RS-232, D-sub Operating voltage: 10-60 VDC Operating temperature: -25 to +70 °C (-13 to +158 °F)
RD-48 3153-xxxx		RS-422/485 Repeater 2 × 300 bit/s to 1.5 Mbit/s, RS-422/485 detachable screw terminal Operating voltage: LV: 9.6-57.6 VDC HV: 85.5-264 VAC or 88-300 VDC Operating temperature: -40 to +70 °C (-40 to 158 °F)
MDW-45 3617-0xxx		RS-422/485 Converter 1 × 300 bit/s to 115.2 kbit/s, RS-232, D-sub 1 × 300 bit/s to 115.2 kbit/s, RS-422/485, detachable screw terminal Operating voltage: LV: 9.6-57.6 VDC, HV: 85.5-264 VAC or 88-300 VDC Operating temperature: -40 to +70 °C (-40 to 158 °F)



Current Loop Converters

Product/Art. no		Description
MD-21 3151-xxxx		20 mA Current loop converter 1 × Up to 19.2 kbit/s, RS-232, D-sub or detachable screw terminal 1 × Up to 19.2 kbit/s, 20 mA current loop, detachable screw terminal Operating voltage: AC: 207-264 VAC, 103-132 VAC, DC: 12-36 VDC, 36-55 VDC Operating temperature: +5 to +50 °C (+41 to 122 °F)


Ethernet Media Converters

Product/Art. no		Description
MCW-211 3645-0xxx		Industrial Ethernet Media Converter 1 x 10/100 Mbit/s, Ethernet TX 1 x 100 Mbit/s, Ethernet FX Operating voltage: 10-60 VDC Operating temperature: -25 to +70 °C (-10 to +158 °F)
MCW-211-F1G-T1G 3645-2001		Industrial Ethernet Gigabit Media Converter 1 x 100/1000 Mbit/s, Ethernet TX, RJ-45 1 x 100/1000 Mbit/s, Ethernet FX, SFP Operating voltage: 9.6-57.6 VDC Operating temperature: -40 to +74 °C (-40 to +165 °F)

i-line

Product/Art. no		Description
MCI-422-MM-SC2 3624-0100		2-channel Ethernet to Fibre Media Converter 2 x 10/100 Mbit/s, Ethernet TX, RJ-45 2 x 100 Mbit/s fibre port, multi-mode 2 km, SC connector Operating voltage: 10-60 VDC Operating temperature: -25 to +75 °C (-13 to +167 °F)
MCI-422-SM-SC30 3624-0110		2-channel Ethernet to Fibre Media Converter 2 x 10/100 Mbit/s, Ethernet TX, RJ-45 2 x 100 Mbit/s fibre port, single-mode 30 km, SC connector Operating voltage: 10-60 VDC Operating temperature: -25 to +75 °C (-13 to +167 °F)

Protocol Converters

M-Bus Converter		
AD-01 3612-0001		M-Bus adapter 1 x Up to 9600 bit/s, RS-232, D-sub or detachable screw terminals 2 x Up to 9600 bit/s, RS-232, detachable screw terminals 2 x Up to 9600 bit/s, detachable screw terminals, M-Bus slave Operating voltage: 207-253 VAC Operating temperature: 0 to +50 °C (+32 to +122 °F)



Accessories

- Optical Transceivers
- Power Supplies/Adapters
- Backup Device
- Cables and Antennas







Applying the finishing touches to your industrial application

To complement your industrial data communication devices and complete the solution, Westermo supplies a range of vital accessories. Whether the application requires an industrial rated power supply, optical transceivers for use with our many fibre optic devices, or cables and antennas for a wireless application, Westermo has you covered.



Optical Transceivers

Westermo offers a wide selection of Small Form Pluggable (SFP) transceivers. The selection of transceivers is available in a variety of models offering transmission ranges from 2 km to 120 km (1.2 mi to 75 mi) over fibre. The CX transceiver allows SFP ports to be used to connect an Ethernet RJ-45 cable. Contact Westermo for detailed information.

Product	Description
Single Mode Transceivers 	Single Mode Transceivers are available in a variety of models. Transmission capacity from 100 Mbit to 1 Gbit and distances from 15 to 120 km (9.3 to 74.6 mi).
Multi Mode Transceivers 	Multi Mode Transceivers are available in a variety of models. Transmission capacity from 100 Mbit to 1 Gbit and distances from 550 m to 2 km (1805 ft to 1.24 mi).
Bi-directional Transceivers 	Bi-Di Transceivers are available in a variety of models. 100 Mbit transmission capacity and distances from 2 km to 60 km. (1.24 mi to 37.3 mi).
CX Transceiver 	CX transceivers link an SFP port to a copper-based network, using a standard RJ-45 connection 1 Gbit transmission capacity and 100 m (328 ft) distance.

Power Supplies/Adapters


Westermo provides a set of industrially approved power supplies complying with many mayor safety approvals. The most common power supplies, PS-30 and PS-100, come in a DIN-mounted housing and can operate in a extended temperature range.

Product/Art. no		Description
PS-30 3125-0001		Power supply, DIN-rail Output: DC 24-28V/30 W PSU Input: 85-264 VAC, 85-375 VDC
PS-100/48 3125-0050		Power supply DIN-rail, PoE Ready PSU Output voltage: 48-56 VDC *preset to: 48 V \pm 0.5% @ 2.1 A Input: AC 100-120/220-240 V (Auto Select), 47-63 Hz (AC 85-132 V/AC 184-264 V, DC 220-375 V)

Backup Device






The USB-M12 is a configuration backup device designed to meet the full requirements of the rail vehicle market.


This device can be used with all the managed EN 50155 switches and allows the configuration of the switch to be saved. The device can then be left attached to the switch for easy maintenance exchange of units. Alternatively, the device allows configurations to be updated by simply plugging it in to the unit and repowering.

Product/Art. no		Description
USB M12 plug IP67 3641-0190		Electrical specification: USB v1.1 Data rate: Up to 480Mbit/s Connection: M12 A-coded male Memory size: 16 Mbyte.

Cables and Antennas

Special cables for reading diagnostics, antennas, radio, fibre and Ethernet are available in a variety of lengths and jacketing options. Please contact Westermo for further information.

Cables		
Product/Art. no		Description
Diagnostic cable 1211-2027		Cable for diagnostic DDW-120 and RedFox console port to USB
M12 cables		M12 - M12 In length, 1 m, 5 m and 15 m (3.28 ft, 16.4 ft and 49.2 ft)
M12-RJ45 cables		M12 - RJ-45 In length, 1 m, 5 m and 15 m (3.28 ft, 16.4 ft and 49.2 ft)
Power cables		M12 In length, 1.5 m and 5 m (4.92 ft and 16.4 ft)
Radio cables RG213		Cables for antennas In length, 3 m, 5 m, 7 m, 10 m and 15 m (9.84 ft, 16.4 ft, 23 ft, 32.8 ft and 49.2 ft)

Antennas		
Product/Art. no		Description
ICL-5 3623-0797		Inter-Consist Link Antenna 5 GHz 3 × 3 MIMO IP67



WeConfig

– Networking made easy

WeConfig is a network configuration management tool that makes it easy to configure single or multiple Westermo devices. WeConfig simplifies both the initial installation of a network and ongoing maintenance once commissioned.

Easy replacement and reconfiguration

Project files store all associated backup files and network topology information. These enable fast and easy replacement and reconfiguration of a damaged switch in the field. A new device can be installed and will automatically be discovered on the network by WeConfig. The configuration file of the old unit can simply be restored from the project file and the network is repaired.

Configuration, monitoring and diagnostics

To achieve network resilience, Westermo devices are automatically reconfigured. In the event of a network failure, processes running on the network are therefore unaffected. Because processes are uninterrupted, the user might not be aware that a network failure has occurred. WeConfig graphically displays the failed link as well as record of the time.

Download WeConfig for free at www.westermo.com



- ⌘ Rapid configuration of new network components saving time
- ⌘ Network monitoring and diagnostics
- ⌘ Easy maintenance of network components
- ⌘ Network configuration information readily available



WeOS

– Westermo Operating System

Westermo delivers resilient network solutions through its WeOS operating system, which is at the heart of our range of robust hardware platforms.

WeOS provides an extensive suite of IP networking standards allowing resilient and flexible networks to be created. Fast recovery times and highly reliable solutions can be achieved even in very complex networks. WeOS also provides multiple layers of security to provide protection against cyber-attacks at the network edge.

Simple and flexible configuration

Made Easy is at the core of the WeOS development, which is why we ensure our intuitive command-line interface is logical and our web interface is simple to use.

Download the latest version of WeOS at www.westermo.com





WeConnect

– Secure remote access

WeConnect is a networking tool that enables secure remote connections to the network edge. Strong encryption techniques make it possible to remotely access any device on the network using a PC, smartphone or tablet. This allows the network to be managed from anywhere in the world, resulting in significant time and cost savings.

Easy set up


WeConnect works with any type of internet connection and there are no limits to the type of media used including ADSL, VDSL2, fibre, cellular or even satellite. WeOS products connect to WeConnect automatically and there is no need for public IP-addresses or special SIM cards.

Reliable connectivity

WeConnect is a very scalable and multi-resilient solution, designed to provide individual secure networks completely isolated from each other. WeConnect is therefore not a multi-tenant solution, removing the possibility of data leakage or restrictions on IP-addresses.

Contact Westermo
to find out more.

- ⌘ Secure remote access to the network edge
- ⌘ All that is needed is a connection to the internet
- ⌘ Designed to solve common industrial networking problems
- ⌘ Reliable connectivity when needed

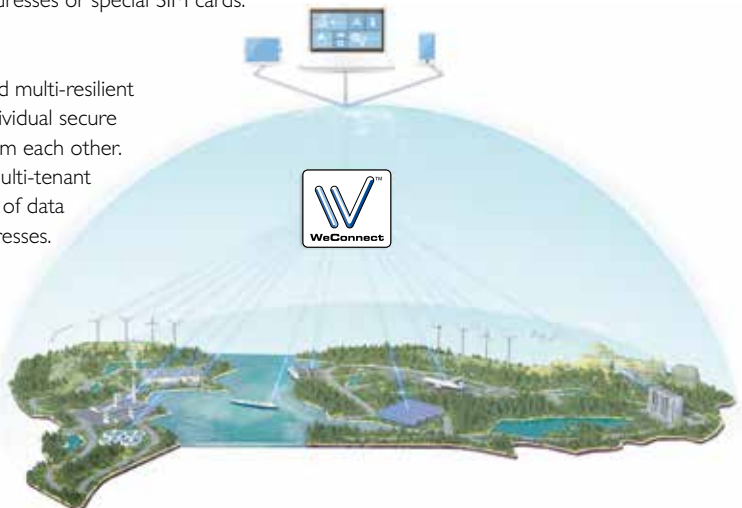



Westermo
SE-635 35 Stora Sundby, Sweden
Tel: +46 16 42 80 00
Fax: +46 16 42 80 01
info@westermo.com
www.westermo.com



Distributed by Gross Automation.
+1 (262) 252-1600 or email sales@grossautomation.com

2020-03 • 100-3870

Westermo Network Technologies AB, Sweden