

FiberPlex™ FP1008E/AT Series **10-Port Industrial Unmanaged PoE+ Gigabit Ethernet Switch (8*10/100/1000Tx + 2*100/1000 SFP Slots)**

User Manual



This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Sales Office: +1 (301) 975-1000
Technical Support: +1 (301) 975-1007
E-mail: support@patton.com
WWW: www.patton.com

Part Number: 50000071, Rev. A
Revised: August 26, 2020

Patton Electronics Company, Inc.

7622 Rickenbacker Drive
Gaithersburg, MD 20879 USA
Tel: +1 (301) 975-1000
Fax: +1 (301) 869-9293
Support: +1 (301) 975-1007
Web: www.patton.com
E-mail: support@patton.com

Trademark Statement

Patton is a registered trademark of Patton Electronics Company in the United States and other countries. *FiberPlex* is a trademark licensed to Patton Electronics Company. All other trademarks in this document are the property of their respective owners.

Copyright © 2020, Patton Electronics Company. All rights reserved.

The information in this document is subject to change without notice. Patton Electronics assumes no liability for errors that may appear in this document.

Warranty Information

The software described in this document is furnished under a license and may be used or copied only in accordance with the terms of such license.

Patton Electronics warrants all FiberPlex devices to be free from defects, and will—at our option—repair or replace the product should it fail within one year from the first date of the shipment.

This warranty is limited to defects in workmanship or materials, and does not cover customer damage, abuse or unauthorized modification. If the product fails to perform as warranted, your sole recourse shall be repair or replacement as described above. Under no condition shall **Patton Electronics** be liable for any damages incurred by the use of this product. These damages include, but are not limited to, the following: lost profits, lost savings and incidental or consequential damages arising from the use of or inability to use this product.

Patton Electronics specifically disclaims all other warranties, expressed or implied, and the installation or use of this product shall be deemed an acceptance of these terms by the user.

Summary Table of Contents

1	General information	10
2	Hardware description	12
3	Mounting installation	21
4	Hardware installation	25
5	Network application	27
6	Troubleshooting	29
7	Contacting Patton for assistance	31
A	Compliance information	34
B	Specifications	37
C	Accessories	42

Table of Contents

Summary Table of Contents	3
Table of Contents	4
List of Figures	6
List of Tables	7
About This Guide	8
Safety when working with electricity	9
Safety when working near hot surfaces	9
General observations	9
1 General information	10
Overview	11
Features	11
Package Contents	11
2 Hardware description	12
Front panel	13
LED Indicators	13
Ethernet Ports	14
Cabling	16
Wiring the Power Inputs	18
Wiring the Fault Alarm Contact	19
3 Mounting installation	21
DIN-Rail Mounting	22
Wall Mounting	23
4 Hardware installation	25
Installation Steps	26
5 Network application	27
Introduction	28
6 Troubleshooting	29
Procedure	30
7 Contacting Patton for assistance	31
Introduction	32
Contact information	32
Warranty Service and Returned Merchandise Authorizations (RMAs)	32
Warranty Coverage	32
Out-of-Warranty Service	32
Returns for Credit	32
RMA Numbers	33
Shipping Instructions	33
A Compliance information	34

Regulatory Information	35
EMC Directive:	35
PSTN:	35
Radio and TV Interference (FCC Part 15)	35
CE Declaration of Conformity	35
Authorized European Representative	36
Service	36
B Specifications	37
Standard	38
EMI	38
Stability Testing	38
Safety	38
Protocol	38
Transmission Line	38
Transmission Distance	38
Transmission Speed	38
MAC Address	38
RJ45 (Ethernet) Port	39
SFP Slot	39
LED	39
Network Cable	39
Over Current Protection	39
Power Input	39
PoE Power Output	39
Fault Output	39
Max Power Consumption	39
Installation	40
Physical	40
Operating Temperature	40
Storage Temperature	40
Humidity	40
Weight	40
Dimensions	40
C Accessories	42
Optional Accessories	43

List of Figures

1	FP1008E/AT front panel	13
2	Straight-through cable schematic	15
3	Crossover cable schematic	15
4	RJ-45 Ethernet port pin-outs	15
5	Straight-through cable schematic	16
6	Crossover cable schematic	16
7	Transceiver to the SFP Module	17
8	Transceiver Inserted	17
9	LC Connector to the Transceiver	17
10	Remove LC Connector	18
11	Pull Out from the SFP Module	18
12	Top Panel View of FP1008E/AT	18
13	Power Terminal Block	19
14	Power Terminal Block	19
15	Wiring the Fault Alarm Contact	19
16	The Rear Side of the Switch and DIN-Rail Bracket	22
17	Insert the Switch on the DIN-Rail	23
18	Stable the Switch on DIN-Rail	23
19	Remove DIN-Rail Bracket from the Switch	24
20	Wall Mounting Bracket Dimensions	24
21	Industrial Ethernet Switch Application Reference	28
22	FP1008E/AT Physical Dimensions	41

List of Tables

1	LED Indicators for FP1008E/AT	13
2	RJ-45 pin assignments	14
3	Ethernet signal pin-outs	14

About This Guide

This guide describes the FiberPlex FP1008E/AT Series hardware, installation, and basic configuration.

Audience

This guide is intended for the following users:

- Operators
- Installers
- Maintenance technicians

Structure

This guide contains the following chapters and appendices:

- [Chapter 1](#) on page 10 provides information about FP1008E/AT features and capabilities
- [Chapter 2](#) on page 12 describes the FP1008E/AT hardware
- [Chapter 3](#) on page 21 describes how to mount the FP1008E/AT on a DIN-Rail or wall
- [Chapter 4](#) on page 25 explains how to install the FP1008E/AT hardware
- [Chapter 5](#) on page 27 describes a typical FP1008E/AT network application
- [Chapter 6](#) on page 29 describes steps for troubleshooting problems that may arise with the FP1008E/AT
- [Chapter 7](#) on page 31 explains how to contact Patton for support
- [Appendix A](#) on page 34 provides compliance information for the FP1008E/AT
- [Appendix B](#) on page 37 provides specifications for the FP1008E/AT
- [Appendix C](#) on page 42 provides a table of optional accessories

For best results, read the contents of this guide *before* you install the FiberPlex FP1008E/AT.

Precautions

Notes and warnings, which have the following meanings, are used throughout this guide to help you become aware of potential extender problems. *Warnings* are intended to prevent safety hazards that could result in personal injury.

Note Highlights a helpful tip to help the user work more efficiently.



The alert symbol and IMPORTANT heading calls attention to important information.



The shock hazard symbol and WARNING heading indicate a potential electric shock hazard. Strictly follow the warning instructions to avoid injury caused by electric shock.

Safety when working with electricity



The FiberPlex device contains no user serviceable parts, and is not be opened by the user. The equipment shall be returned to Patton Electronics for repairs or repaired by qualified service personnel.



For AC powered units, ensure that the power cable used meets all applicable standards for the country in which it is to be installed, and that it is connected to a wall outlet which has earth ground.



Do not work on the system or connect or disconnect cables during periods of lightning activity.

Safety when working near hot surfaces



This warning label on the device means that the surface of the device may be hot. To avoid personal injury, be careful when touching the device while it is operating.

General observations

- Clean the case with a soft slightly moist anti-static cloth
- Place the unit on a flat surface and ensure free air circulation
- Avoid exposing the unit to direct sunlight and other heat sources
- Protect the unit from moisture, vapors, and aggressive liquids

Chapter 1

General information

Chapter contents

Overview	11
Features	11
Package Contents	11

Overview

Patton's FP1008E/AT Series 10-Port Industrial Gigabit Unmanaged PoE+ Switches are IP30 rated and DIN-Rail mountable. Each unit is designed with 8-gigabit Ethernet ports that are IEEE802.3at compliant (power over Ethernet, 30W) and 2 dual-rate (100/1000) SFP slots, making it ideal for applications that demand high bandwidth and long distance communication.

This product provides high EFT and ESD protection to prevent any unregulated voltage and is suitable for harsh environments. It supports the power redundancy feature using a dual power input design with reverse polarity protection. In addition, the built-in relay warning function alerts maintainers when power failures occur.

The FP1008E/AT has an extended operating temperature range of -40 to 167°F (-40 to 75°C). It is a perfectly designed product to fulfill any special needs for industrial automation, outdoor applications and harsh weather environments.

Features

- System Interface/Performance
 - / All RJ-45 ports support auto MDI/MDI-X function
 - / Embedded 8*10/100/1000Tx (PSE 30W/port) and 2*100/1000 SFP slots
 - / Store-and-forward switching architecture
 - / 8K MAC address table
 - / Jumbo frame supports: 9.6K
 - / Power line EFT protection: 2,000 VDC; Ethernet ESD protection: 6,000 VDC
- Power Input
 - / DC 48–55V redundant power
- Operating Temperature: 40 to 167°F (-40 to 75°C)
- Case/Installation
 - / IP30 protection
 - / Installation in pollution degree to environment
 - / DIN-Rail and wall mount design

Package Contents

- 1—10-port industrial gigabit unmanaged PoE+ switch, with 8*10/100/1000Tx (30W/port) + 2*100/1000 SFP slots
- 2—Wall mounting brackets and screws
- 1—DC cable (18 AWG) and DC jack 5.5 x 2.1mm

Chapter 2

Hardware description

Chapter contents

Front panel.....	13
LED Indicators.....	13
Ethernet Ports	14
Cabling.....	16
Wiring the Power Inputs	18
Wiring the Fault Alarm Contact.....	19

Front panel

The front panel of the FP1008E/AT industrial gigabit unmanaged PoE+ switch is shown in [figure 1](#).



Figure 1. FP1008E/AT front panel

LED Indicators

There are LED light indicators located on the front panel of the industrial Ethernet switch that display the power status and network status. Each LED indicator has a different color and has its own specific meaning, see [table 1](#).

Note *P1* is the abbreviation for *Power 1*, *P2* for *Power 2*, *LNK* for *Link*, and *ACT* for *Activity*

Table 1. LED Indicators for FP1008E/AT

LED	Color	Status	Description
P1	Green	On	Power input 1 is active
		Off	Power input 1 is inactive
P2	Green	On	Power input 2 is active
		Off	Power input 2 is inactive

Table 1. LED Indicators for FP1008E/AT (Continued)

LED	Color	Status	Description
Fault	Red	On	Power input 1 or 2 is inactive
		Off	Power input 1 and 2 are both functional, or no power, inputs/ports link is active/port alarm is disabled
PoE Indicators (Ports 1–8)	Green	On	Port is supplying power to the powered device (PD)
		Off	No PD attached or supplied power has failed
LNK/ACT (SFP Port)	Green	On	Connected to network
		Flashing	Networking is active
		Off	Not connected to network
LAN Port 1–5 (Left LED)		On	Connected to network, 1000 Mbps
		Flashing	Networking is active
		Off	Not connected to network
LAN Port 1–5 (Right LED)		On	Connected to network, 100 Mbps/10 Mbps
		Flashing	Networking is active
		Off	Not connected to network

Ethernet Ports

RJ-45 Ports (Auto MDI/MDIX): The RJ-45 ports are auto-sensing for 10Base-T, 100Base-TX or 1000Base-T devices connections. Auto MDI/MDIX means that the switch can connect to another switch or workstation without changing the straight-through or crossover cabling. See [figure 2](#), [figure 3](#), and [figure 4](#) on page 15, and [figure 5](#) and [figure 6](#) on page 16 for straight-through and crossover cabling schematics.

Table 2. RJ-45 pin assignments

Pin Number	Assignment
1	Rx+
2	Rx-
3	Tx+
6	Tx-

Note “+” and “-” signs represent the polarity of the wires that make up each wire pair.

All ports on this industrial Ethernet switch support automatic MDI/MDI-X operation. Users can use straight-through cables (see) for all network connections to PCs, servers, other switches or hubs. With straight-through cable, pins 1, 2, 3, and 6, at one end of the cable, are connected straight through to pins 1, 2, 3 and 6 at the other end of the cable. [table 3](#) shows the 10ase-T, 100Base-TX, 1000Base-TX MDI and MDI-X port pin-outs.

Table 3. Ethernet signal pin-outs

Pin MDI-X	Signal Name	MDI Signal Name
1	Receive Data plus (RD+)	Transmit Data plus (TD+)

Table 3. Ethernet signal pin-outs (Continued)

Pin MDI-X	Signal Name	MDI Signal Name
2	Receive Data minus (RD-)	Transmit Data minus (TD-)
3	Transmit Data plus (TD+)	Receive Data plus (RD+)
6	Transmit Data minus (TD-)	Receive Data minus (RD-)

Figure 2 and figure 3 show the cabling schematics for straight-through and crossover

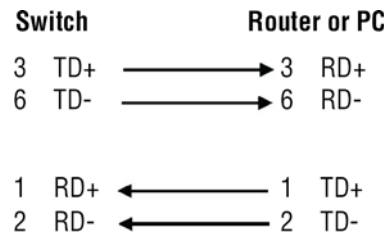


Figure 2. Straight-through cable schematic

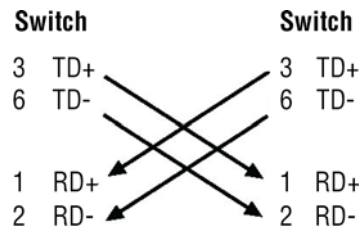


Figure 3. Crossover cable schematic

Figure 4, along with figure 5 and figure 6 on page 16 show the 10, 100, and 1000 Ethernet RJ-45 pin-outs.

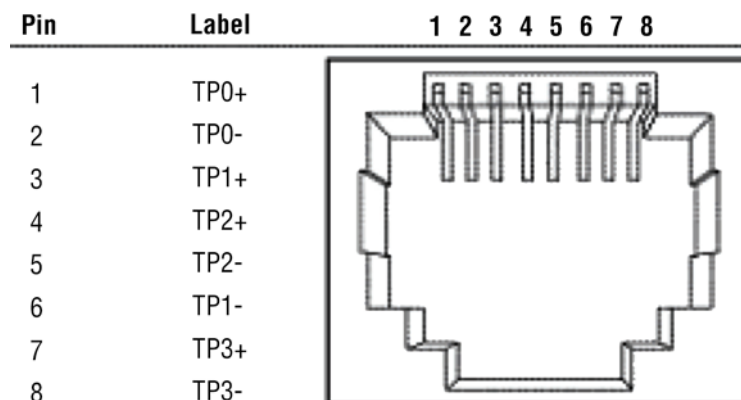


Figure 4. RJ-45 Ethernet port pin-outs

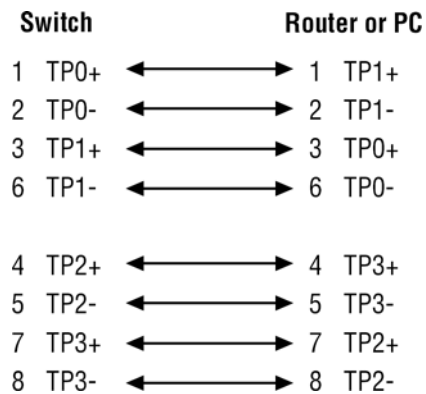


Figure 5. Straight-through cable schematic

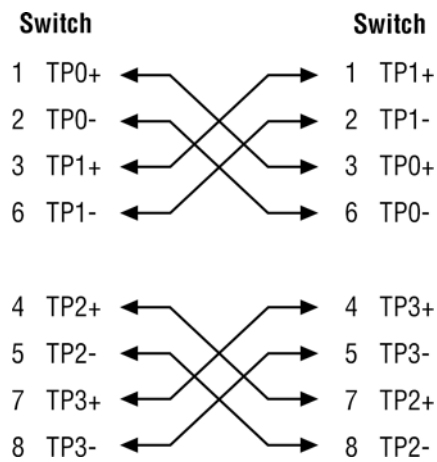


Figure 6. Crossover cable schematic

Cabling


Use the four twisted-pair, category 5e, or the above cabling for RJ-45 port connections. The cable between the switch and the link partner (switch, hub, workstation, etc.) must be less than 100 meters (328 ft.) long.

The small form-factor pluggable (SFP) is a compact optical transceiver used in optical communications for both telecommunication and data communication applications.

To connect the transceiver and LC cable, do the following:

1. Insert the SFP transceiver module into the SFP slot as shown in [figure 7](#) on page 17. [Figure 8](#) on page 17 shows the SFP transceiver module inserted into the slot.

Note The triangle mark is at the bottom of the SFP slot.

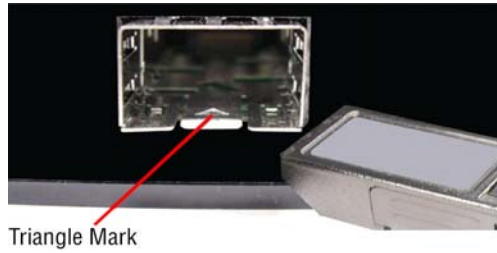

Triangle Mark

Figure 7. Transceiver to the SFP Module



Figure 8. Transceiver Inserted

2. Insert the fiber cable of the LC connector into the transceiver as shown in [figure 9](#).

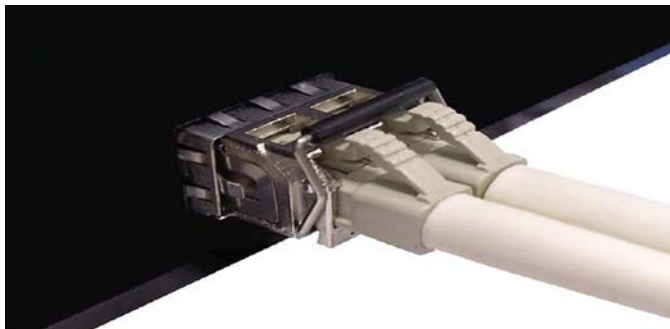


Figure 9. LC Connector to the Transceiver

To remove the LC connector from the transceiver, do the following:

1. Press the upper side of the LC connector from the transceiver and pull it out to release as shown in [figure 10](#) on page 18.

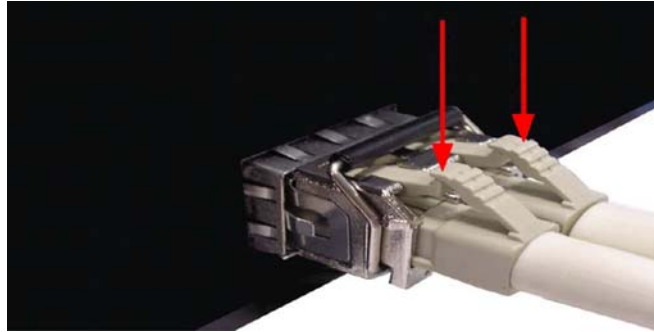


Figure 10. Remove LC Connector

2. Push down the metal clasp and pull the transceiver out by the plastic part as shown in [figure 11](#).

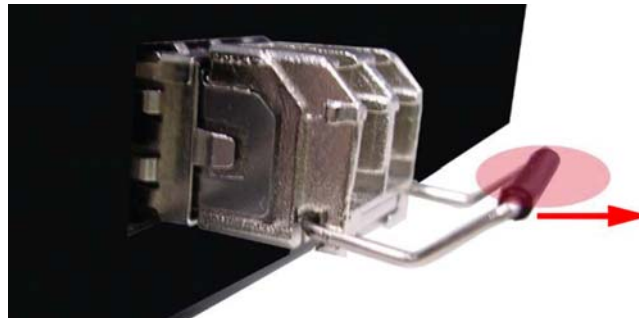


Figure 11. Pull Out from the SFP Module

Wiring the Power Inputs

[Figure 12](#) shows the top panel of the FP1008E/AT switch that is equipped with one 6-pin removal terminal block connector for dual DC power inputs (48~55VDC).

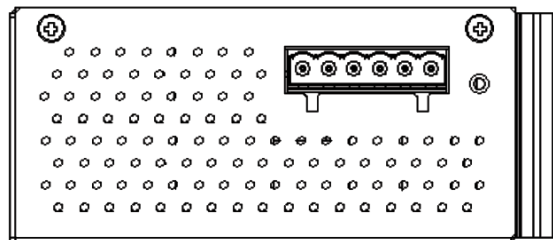


Figure 12. Top Panel View of FP1008E/AT

Do the following to insert the power wire:

1. Insert the positive and negative wires into the PWR1 (V1+, V1-) and PWR2 (V2+, V2-) contacts on the terminal block connector as shown in [figure 13](#) on page 19.

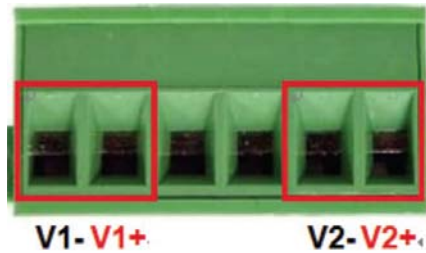


Figure 13. Power Terminal Block

2. Tighten the wire-clamp screws to prevent the wires from loosening, as shown in [figure 14](#).

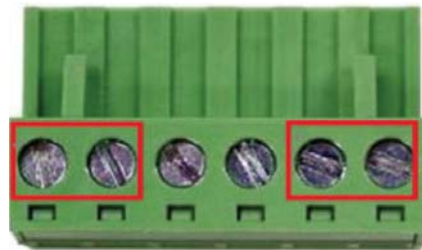


Figure 14. Power Terminal Block



IMPORTANT

Only use copper conductors, **60/75°C**, tightened to **5 lbs.**
The wire gauge for the terminal block should range between **18~20 AWG**.

Wiring the Fault Alarm Contact

The fault alarm contact is in the middle of the terminal block connector as shown in [figure 15](#). By inserting the wires, it will detect the fault status including power failure or port link failure (managed industrial switch only) and form a normally open circuit. An application example for the fault alarm contact is shown in [figure 15](#).

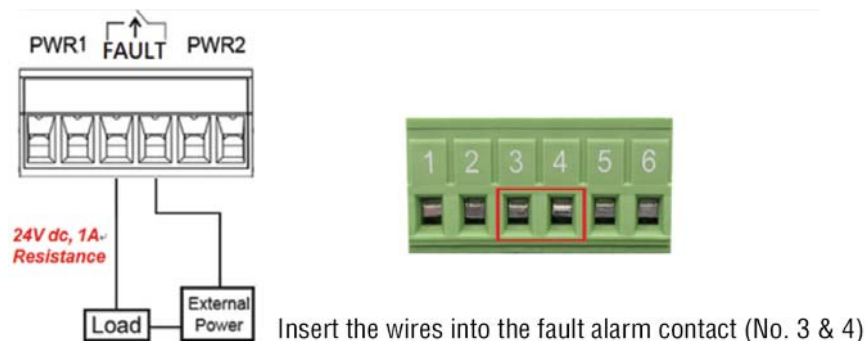


Figure 15. Wiring the Fault Alarm Contact



The wire gauge for the terminal block should range between **12 ~ 24 AWG**.

If only using one power source, jumper Pin 1 to Pin 5 and Pin 2 to Pin 6 to eliminate power fault alarm.

Chapter 3

Mounting installation

Chapter contents

DIN-Rail Mounting.....	22
Wall Mounting.....	23

DIN-Rail Mounting

The DIN-Rail is pre-installed on the industrial Ethernet switch from the factory. If the DIN-Rail is not on the industrial Ethernet switch, see [figure 16](#) to learn how to install the DIN-Rail on the switch.

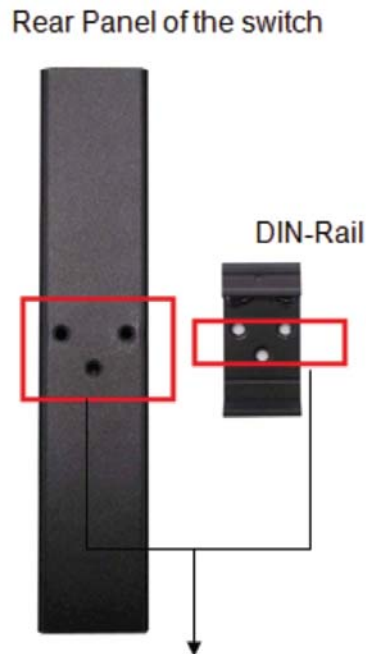


Figure 16. The Rear Side of the Switch and DIN-Rail Bracket

Do the following to learn how to hang the industrial Ethernet switch:

1. Use the screws to install the DIN-Rail bracket on the rear side of the industrial Ethernet switch.
2. To remove the DIN-Rail bracket, do the opposite from step 1.
3. After the DIN-Rail bracket is installed on the rear side of the switch, insert the top of the DIN-Rail on to the track as shown in [figure 17](#) on page 23.



Figure 17. Insert the Switch on the DIN-Rail

4. Lightly pull down the bracket on to the rail as shown in [figure 18](#).

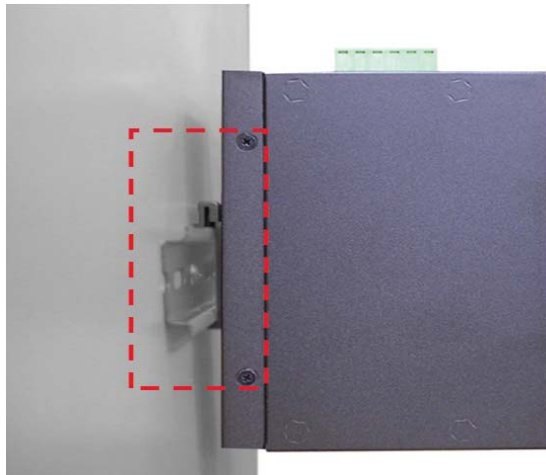


Figure 18. Stable the Switch on DIN-Rail

5. Check if the bracket is mounted tightly on the rail.
6. To remove the industrial Ethernet switch from the rail, do the opposite from the above steps.

Wall Mounting

Follow the steps below to mount the industrial Ethernet switch using the wall mounting bracket as shown in [figure 19](#) on page 24.

1. Remove the DIN-Rail bracket from the industrial Ethernet switch by loosening the screws.
2. Place the wall mounting brackets on the top and bottom of the industrial Ethernet switch.
3. Use the screws to screw the wall mounting bracket on the industrial Ethernet switch.

4. Use the hook holes at the corners of the wall mounting bracket to hang the industrial Ethernet switch on the wall.
5. To remove the wall mount bracket, do the opposite from the steps above.

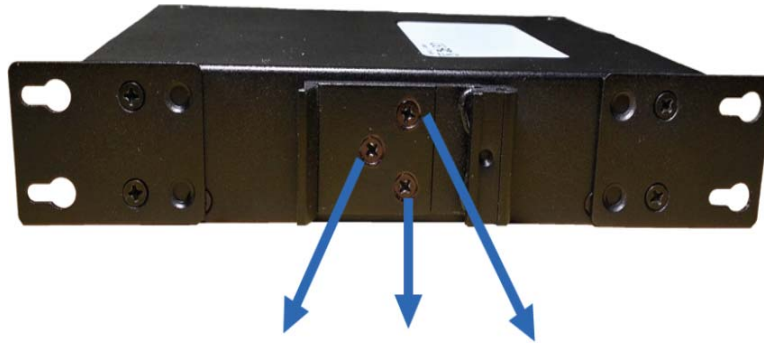


Figure 19. Remove DIN-Rail Bracket from the Switch

The dimensions of the wall mounting bracket are shown in [figure 20](#).

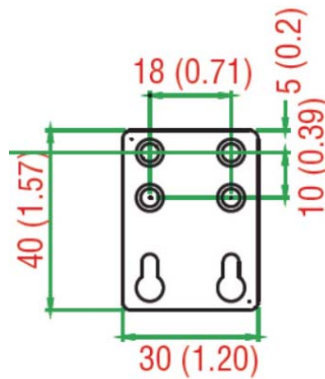


Figure 20. Wall Mounting Bracket Dimensions

Chapter 4 **Hardware installation**

Chapter contents

Installation Steps26

Installation Steps

This section will explain how to install Patton's FP1008E/AT: 10-port industrial gigabit unmanaged PoE+ switch with 8*10/100/1000Tx (30W) + 2*100/1000 SFP slots.

1. Unpack the industrial Ethernet switch from the original packing box.
2. Check if the DIN-Rail bracket is screwed on the industrial Ethernet switch.
 - If the DIN-Rail is not screwed on the industrial Ethernet switch, refer to section “[DIN-Rail Mounting](#)” on page 22 for DIN-Rail installation.
 - If you want to wall mount the industrial Ethernet switch, refer to section “[Wall Mounting](#)” on page 23 for wall mounting installation.
3. To hang the industrial Ethernet switch on a DIN-Rail or wall, refer to chapter 3 “[Mounting installation](#)” on page 21.
4. Power on the industrial Ethernet switch and then the power LED light will turn on.
 - If you need help on how to wire power, refer to section “[Wiring the Power Inputs](#)” on page 18.
 - Refer to section “[LED Indicators](#)” on page 13 for LED light indications.
5. Prepare the twisted-pair, straight-through category 5 cable for Ethernet connection.
6. Insert one side of the RJ-45 cable into switch's Ethernet port and on the other side into the networking device's Ethernet port, e.g. switch PC or server. The Ethernet port's (RJ-45) LED on the industrial Ethernet switch will turn on when the cable is connected to the networking device.
 - Refer to section “[LED Indicators](#)” on page 13 for LED light indications.
7. When all connections are set and the LED lights all show normal, the installation is complete.

Chapter 5

Network application

Chapter contents

Introduction28

Introduction

Figure 21 shows an example of an industrial Ethernet switch application.

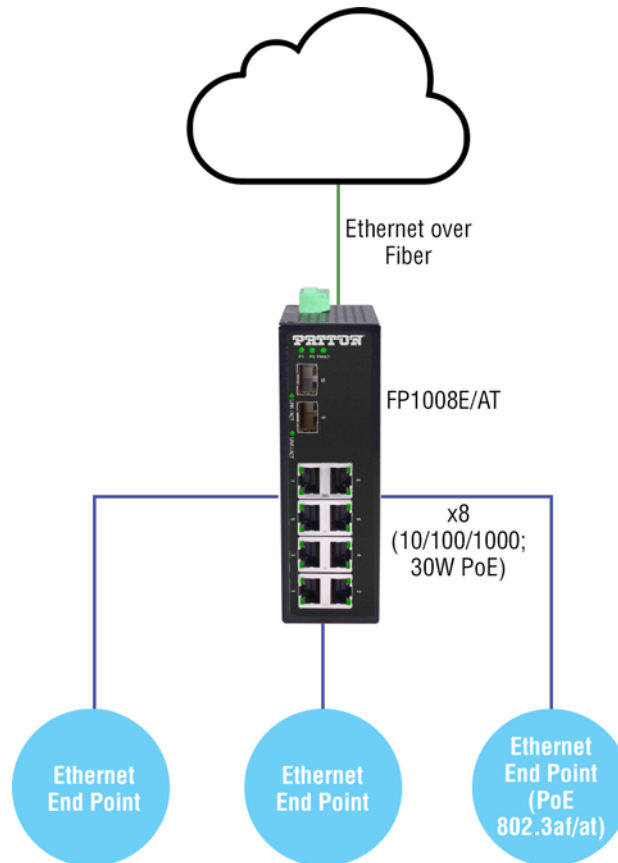


Figure 21. Industrial Ethernet Switch Application Reference

Chapter 6

Troubleshooting

Chapter contents

Procedure30

Procedure

- Verify you have the right power cord or adapter. Never use a power supply or adapter with a non-compliant DC output voltage or it will burn the equipment.
- Select the proper UTP or STP cable in order to construct the network. Use an unshielded twisted-pair (UTP) or shield twisted-pair (STP) cable for RJ-45 connections: 100-ohm Category 5e for 10M/100Mbps. Also be sure that the length of any twisted-pair connection does not exceed 100 meters (328 feet).
- **Diagnosing LED Indicators:** To assist in identifying problems, the switch can be easily monitored with the LED indicators which help to identify if any problems exist.
 - Please refer to the LED Indicators section for LED light indication.
- If the power indicator LED does not turn on when the power cord is plugged in, the user may have a problem with the power cord. Check for loose power connections, power losses or surges at the power outlet.
 - Please contact Patton for technical support service, if the problem still cannot be resolved.
- If the industrial switch LED indicators are normal and the connected cables are correct but the packets still cannot transmit, please check the system's Ethernet devices' configuration or status.

Chapter 7

Contacting Patton for assistance

Chapter contents

Introduction	32
Contact information.....	32
Warranty Service and Returned Merchandise Authorizations (RMAs)	32
Warranty Coverage	32
Out-of-Warranty Service	32
Returns for Credit	32
Return-for-Credit Policy	33
RMA Numbers	33
Shipping Instructions	33

Introduction

This chapter contains the following information:

- “[Contact information](#)”—describes how to contact Patton technical support for assistance.
- “[Warranty Service and Returned Merchandise Authorizations \(RMAs\)](#)”—contains information about obtaining a return merchandise authorization (RMA).

Contact information

Patton Electronics offers a wide array of free technical services. If you have questions about any of our other products we recommend you begin your search for answers by using our technical knowledge base. Here, we have gathered together many of the more commonly asked questions and compiled them into a searchable database to help you quickly solve your problems:

- Online support—available at www.patton.com/returns/
- E-mail support—e-mail sent to support@patton.com will be answered within 1 business day
- Telephone support—standard telephone support is available five days a week—from **8:00 am to 5:00 pm EST (1300 to 2200 UTC)**—by calling **+1 (301) 975-1007**

Warranty Service and Returned Merchandise Authorizations (RMAs)

Patton Electronics is an ISO-9001 certified manufacturer and our products are carefully tested before shipment. All of our products are backed by a comprehensive warranty program.

Note If you purchased your equipment from a Patton Electronics reseller, ask your reseller how you should proceed with warranty service. It is often more convenient for you to work with your local reseller to obtain a replacement. Patton services our products no matter how you acquired them.

Warranty Coverage

Our products are under warranty to be free from defects, and we will, at our option, repair or replace the product should it fail within one year from the first date of shipment. Our warranty is limited to defects in workmanship or materials, and does not cover customer damage, lightning or power surge damage, abuse, or unauthorized modification.

Out-of-Warranty Service

Patton services what we sell, no matter how you acquired it, including malfunctioning products that are no longer under warranty. Our products have a flat fee for repairs. Units damaged by lightning or other catastrophes may require replacement.

Returns for Credit

Customer satisfaction is important to us, therefore any product may be returned with authorization within 30 days from the shipment date for a full credit of the purchase price. If you have ordered the wrong equipment or you are dissatisfied in any way, please contact us to request an RMA number to accept your return. Patton is not responsible for equipment returned without a Return Authorization.

Return-for-Credit Policy

- Less than 30 days: No Charge. Your credit will be issued upon receipt and inspection of the equipment.
- 30 to 60 days: We will add a 20% restocking charge (crediting your account with 80% of the purchase price).
- Over 60 days: Products will be accepted for repairs only.

RMA Numbers

RMA numbers are required for all product returns. You can obtain an RMA by doing one of the following:

- Completing a request on the RMA Request page in the *Support* section at **www.patton.com/returns/**
- By calling **+1 (301) 975-1007** and speaking to a Technical Support Engineer
- By sending an e-mail to **returns@patton.com**

All returned units must have the RMA number clearly visible on the outside of the shipping container. Please use the original packing material that the device came in or pack the unit securely to avoid damage during shipping.

Shipping Instructions

The RMA number should be clearly visible on the address label. Our shipping address is as follows:

Patton Electronics Company

RMA#: xxxx

7622 Rickenbacker Dr.

Gaithersburg, MD 20879-4773 USA

Patton will ship the equipment back to you in the same manner you ship it to us. Patton will pay the return shipping costs.

Appendix A

Compliance information

Chapter contents

Regulatory Information	35
EMC Directive:	35
PSTN:	35
Radio and TV Interference (FCC Part 15)	35
CE Declaration of Conformity	35
Authorized European Representative	36
Service	36

Regulatory Information

EMC Directive:

- EN 55032:2012/AC:2013 Class A
- EN 55024:2010
- EN 50581:2012
- EN 50564:2011

PSTN:

- This device is not intended nor approved for connection to the PSTN

Radio and TV Interference (FCC Part 15)

This equipment has been tested and found to comply with the limits for a Class-A digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy. It may cause harmful interference to radio communications if the equipment is not installed and used in accordance with the instructions. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.

CE Declaration of Conformity

This device is in compliance with the essential requirements and other relevant provisions of Directive 2004/30/EC relating to electromagnetic compatibility. Council Directive 2011/65/EU on the approximation of the laws of the member states relating to RoHS compliance and Council Directive 2009/125/EC establishing a framework for the setting of ecodesign requirements for energy-related products. The Declaration of Conformity may be obtained from Patton Electronics, Inc at www.patton.com/certifications.

The safety advice in the documentation accompanying this device shall be obeyed. The conformity to the above directive is indicated by CE mark on the device.

Authorized European Representative

D R M Green

European Compliance Services Ltd
Greyfriars Court
Paradise Square
Oxford, OX1 1BE, UK

Service

All warranty and non-warranty repairs must be returned freight prepaid and insured to Patton Electronics. All returns must have a Return Materials Authorization number on the outside of the shipping container. This number may be obtained from Patton Electronics Technical Services at:

- Tel: +1 (301) 975-1007
- Email: support@patton.com
- URL: <http://www.patton.com>

Packages received without an RMA number will not be accepted.

Appendix B **Specifications**

Chapter contents

Standard	38
EMI.....	38
Stability Testing	38
Safety.....	38
Protocol.....	38
Transmission Line	38
Transmission Distance	38
Transmission Speed.....	38
MAC Address.....	38
RJ45 (Ethernet) Port	39
SFP Slot	39
LED	39
Network Cable	39
Over Current Protection	39
Power Input	39
PoE Power Output.....	39
Fault Output	39
Max Power Consumption.....	39
Installation	40
Physical	40
Operating Temperature	40
Storage Temperature	40
Humidity	40
Weight	40
Dimensions	40

Standard

- IEEE 802.3 10BaseT Ethernet
- IEEE 802.3u 100BaseTX Fast Ethernet
- IEEE 802.3ab 1000BaseT
- IEEE 802.3z gigabit Fiber

EMI

- FCC Class A
- CE EN61000-4-2,3,4,5,6,8,11,12
- CE EN61000-6-2
- CE EN61000-6-4

Stability Testing

- IEC60068-2-32 (Free fall)
- IEC60068-2-27 (Shock)
- IEC60068-2-6 (Vibration)

Safety

- FCC, CE, UL 61010-1, UL 61010-2-201
- UL Class 1 Division 2, ISA 12.12.01

Protocol

CSMA/CD

Transmission Line

- 14,880pps for Ethernet port
- 148,800pps for fast Ethernet port
- 1,488,000pps for gigabit Ethernet port

Transmission Distance

Up to 100M (Fast Ethernet)

Transmission Speed

Up to 1000Mbps

MAC Address

8*10/100/1000Tx auto negotiation speed, full/half duplex mode, and auto MDI/MDI-X connection

RJ45 (Ethernet) Port

Up to 1000Mbps (30W/port)

SFP Slot

2*SFP slots support dual rate 100/1000

PoE pin assignment: V+, V+, V-, V- for pins 1, 2, 3, 6 (Endspan, MDI-X Alternative A)

LED

- Power Unit: P1 (Green), P2 (Green), Fault (Red)
- Ethernet port: Link/active (Green), 1000Mbps
- SFP: Link/active (Green)

Network Cable

- 10BaseT: 2-pair UTP/STP Cat. 3, 4, 5 cable
- EIA/TIA-568 100-ohm (100m)
- 100BaseTX: 2-pair UTP/STP Cat. 5 cable
- EIA/TIA-568 100-ohm (100m)
- 1000BaseTX: UTP/STP Cat. 5/5E cable
- EIA/TIA-568 100-ohm (100m)

Over Current Protection

Single-blown fuse

Power Input

- Redundant power DC 48~55VDC with connective
- 1*6-pin removable terminal block

PoE Power Output

25W @ 48 VDC (per PoE port); 30W @ 51–55 VDC (per PoE port)

Fault Output

1 Relay output

Max Power Consumption

210 Watts @ 48 VDC; 250 W @ 51–55 VDC full load with PoE function

Installation

DIN-Rail mounting, wall mounting (optional)

Physical

Operating Temperature

-40 to 75°C (-40 to 167°F)

Storage Temperature

-40 to 85°C (-40 to 185°F)

Humidity

5 to 95% (Non-Condensing)

Weight

- Unit: 2.33 lbs (1.05 kg)
- Shipping: 2.95 lbs (1.34 kg)

Dimensions

1.81W x 3.89D x 5.59H in. (46W x 99D x 142H mm)

Figure 22 on page 41 shows the physical dimensions of Patton's FP1008E/AT: 10-port industrial gigabit unmanaged PoE+ switch with 8*10/100/1000Tx (30W) + 2*100/1000SFP slots.

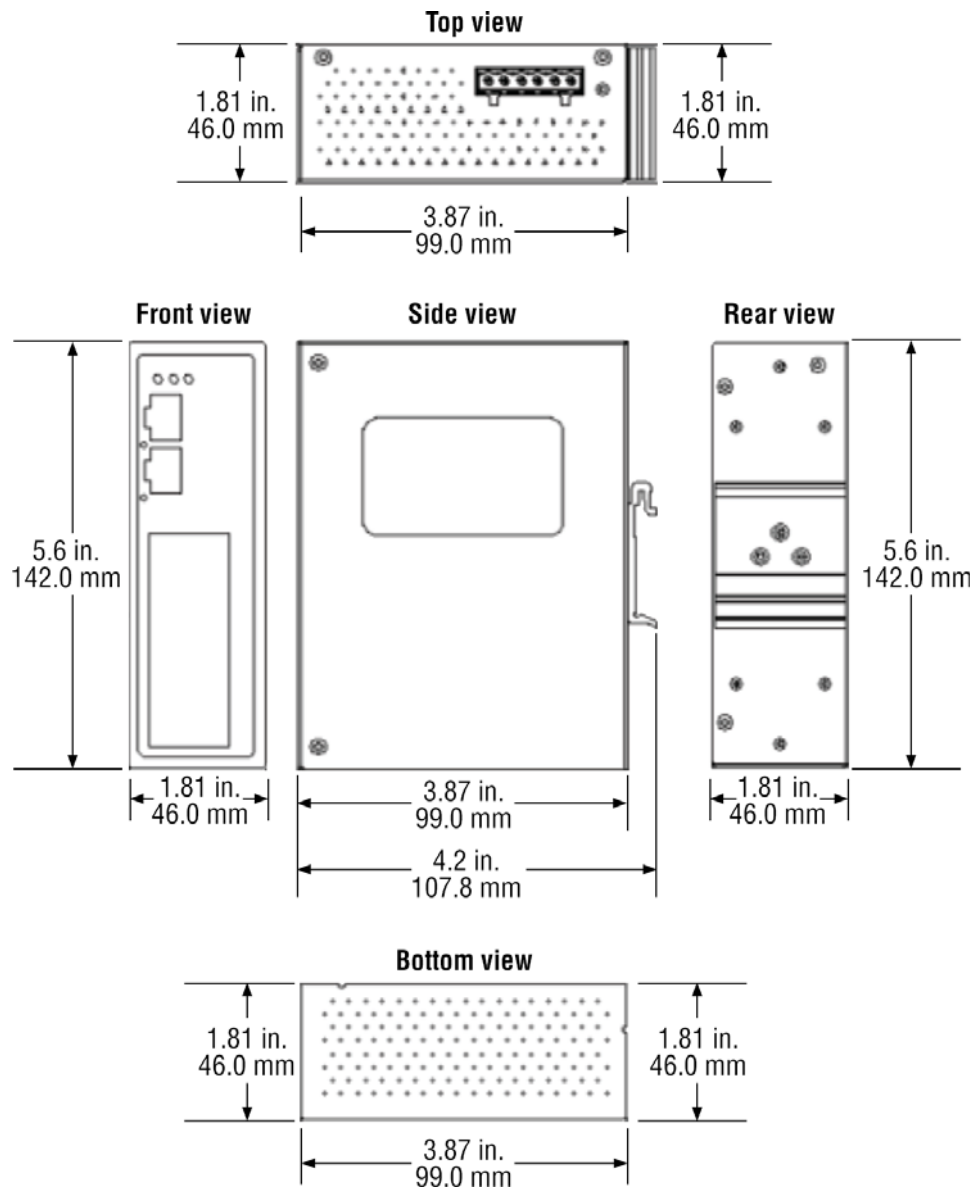


Figure 22. FP1008E/AT Physical Dimensions

Appendix C **Accessories**

Chapter contents

Optional Accessories.....43

Optional Accessories

Patton Model #	Description
PS-03671H1-002	AC/DC 12V, 2A Power Adapter (0 to 50°C)
PS-03671H1-020	AC/DC 21–27V, 15W Power Adapter (-40 to 85°C)
NS-1001R-19ADJDIN	19" Rackmount Adjustable Depth 35mm DIN Rail Kit