

PIN #	COLOR
1	ORANGE
2	BLUE
3	WHITE w/BLACK
4	RED w/BLACK
5	GREEN w/BLACK
6	ORANGE w/BLACK
7	RED
8	GREEN / YELLOW
9	BLACK
10	WHITE

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN SW	3/14/2005	

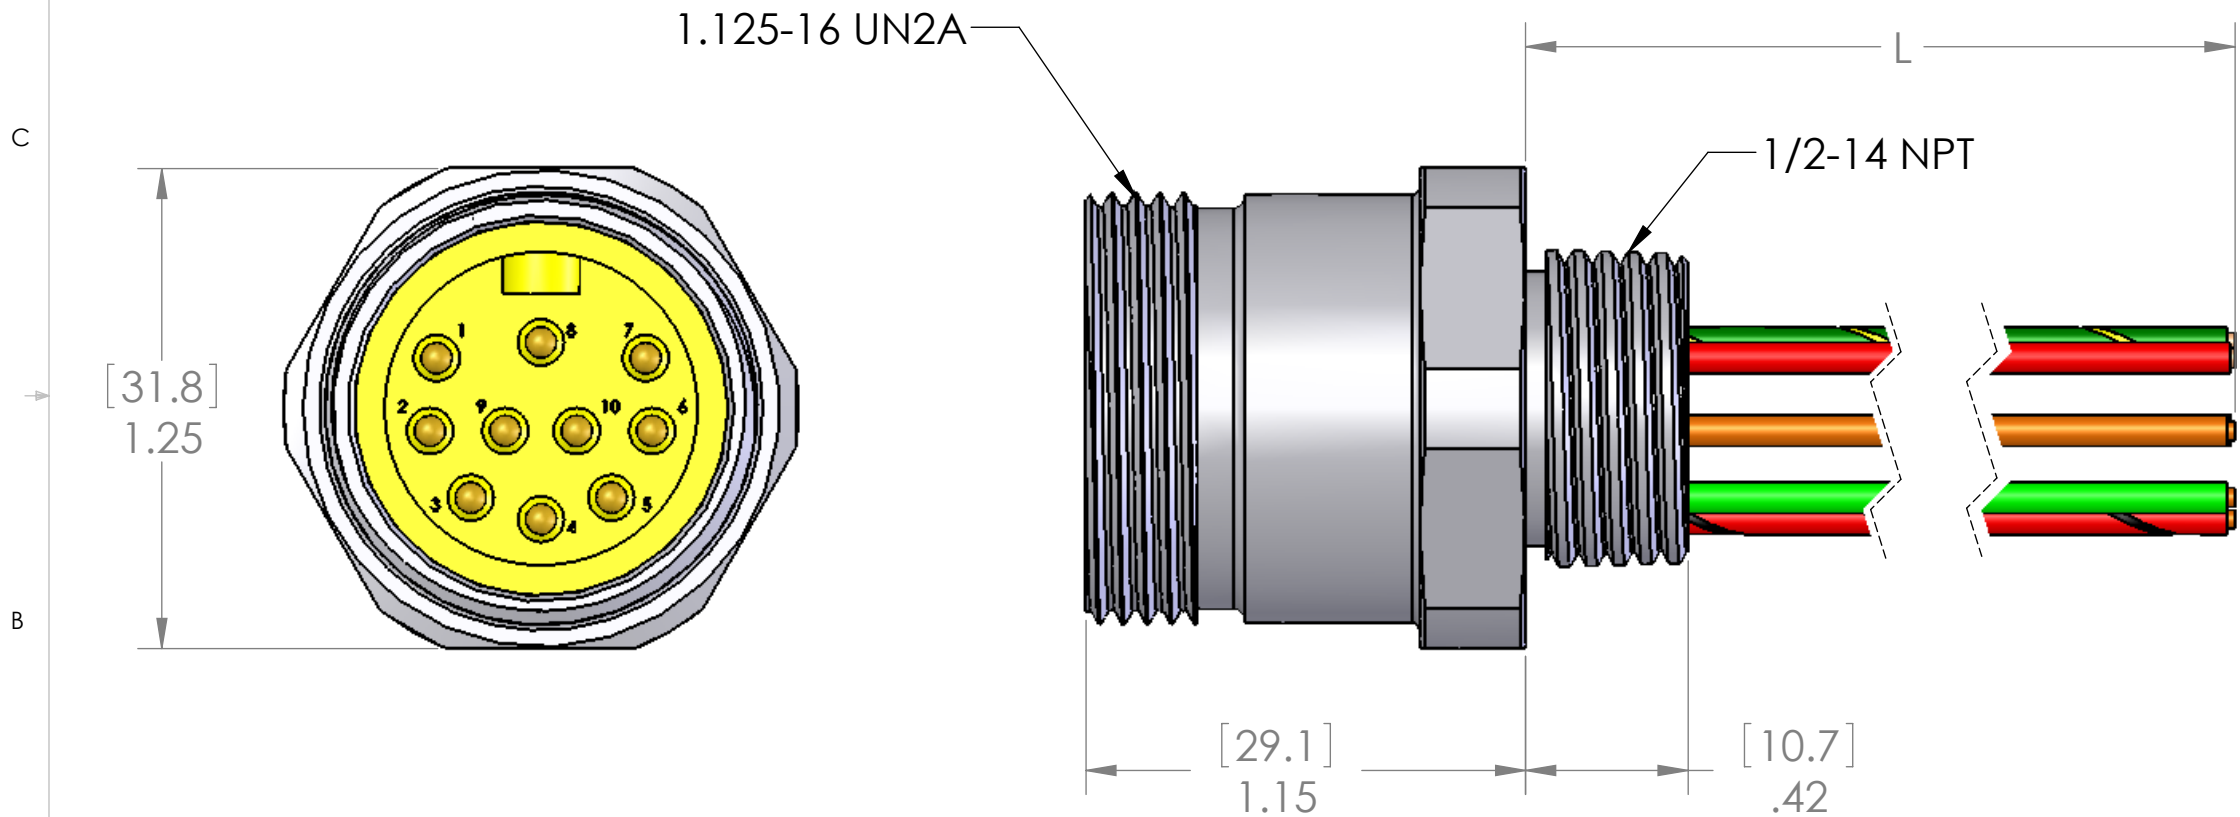


TABLE A	
P/N	L
MIN-10MR-1-18	12" [0.3m]
MIN-10MR-2-18	24" [0.6m]
MIN-10MR-3-18	36" [0.9m]
MIN-10MR-4-18	48" [1.2m]
MIN-10MR-5-18	60" [1.5m]
MIN-10MR-6-18	72" [1.8m]
MIN-10MR-10-18	120" [3.1m]
MIN-10MR-15-18	180" [4.6m]
MIN-10MR-20-18	240" [6.1m]

AN O-RING AND LOCKNUT ARE SUPPLIED
ON LENGTHS OF 24" AND LONGER

MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRE:	18AWG UL1007 / 1569
INSERT:	YELLOW PVC
O-RING:	BUNA-N
NUT:	ZINC PLATED STEEL
APPROVALS	
U.S.	UL LISTED
CANADA	C-UL LISTED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP	105°C
SPECIFICATIONS	

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

NAME	BEM
DRAWN	
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

MENCOM CORPORATION			
TITLE:			
SIZE	DWG. NO.	REV	
B	MIN-10MR-ZZ-18	A	
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1	