

6

5



4

3

2

1

CATALOG NUMBER	MATERIAL NUMBER	CONDUIT SIZE	N.P.T. FITTING SIZE	LENGTH "M"	DIAMETER "A" REF.	LENGTH "B" REF.	LENGTH "C" REF.	PRODUCT SELECTION NUMBER	UL LISTED	CSA APRVD
36441	-----	3/8"	1/2"	3.875±0.500 / 98.43±12.70	1.0 / 25	1.13 / 28.7	0.44 / 11.2	STB038FP	Y E S	Y E S
36380	1300960041	1/2"	1/2"	4.625±0.500 / 117.48±12.70	1.2 / 30	1.25 / 31.8	0.44 / 11.2	STB050FP		
36381	1300960042	3/4"	3/4"	5.750±0.500 / 146.05±12.70	1.4 / 36	1.50 / 38.1	0.50 / 12.7	STB075FP		
36382	1300960043	1"	1"	7.000±0.500 / 177.80±12.70	1.7 / 43	1.81 / 45.9	0.69 / 17.5	STB100FP		

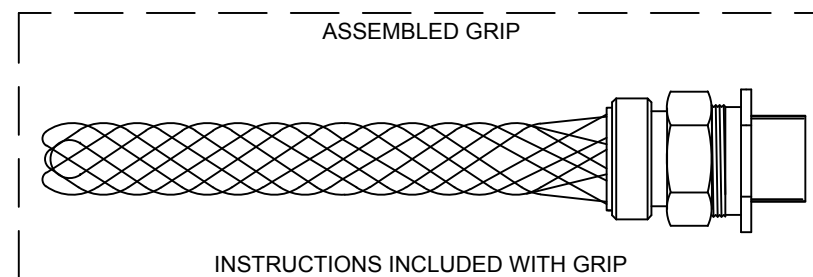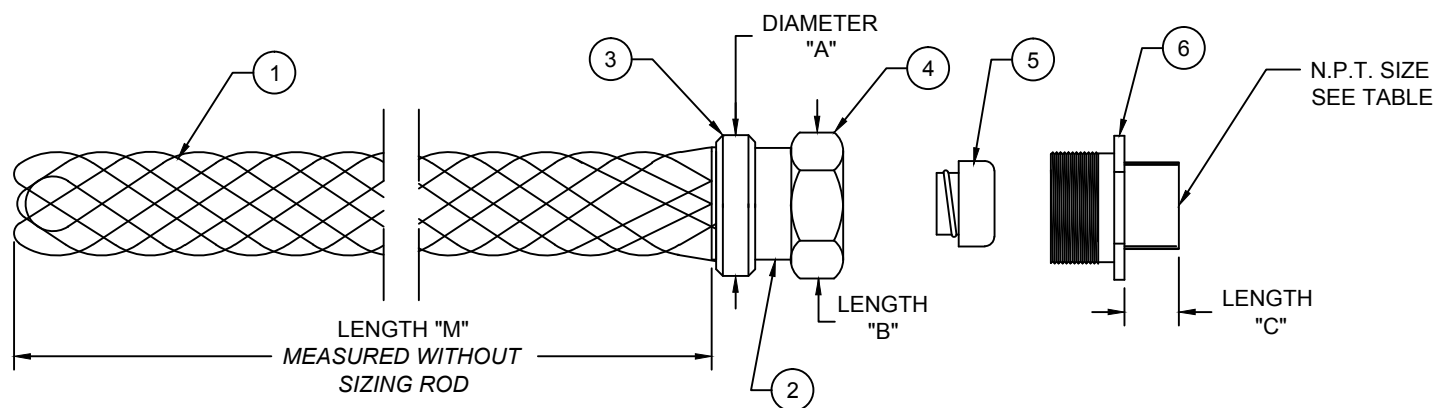

ITEM	DESCRIPTION	MATERIAL
1	WIRE MESH	STAINLESS STEEL
2	INNER RING	ZINC PLATED STEEL
3	OUTER RING	ALUMINUM
4	COMPRESSION NUT	ZINC PLATED STEEL OR MALLEABLE IRON
5	FERRULE	ZINC PLATED STEEL OR ALUMINUM
6	THREADED BODY	ZINC PLATED STEEL OR MALLEABLE IRON

RELEASE SALES DWG
EC NO: IGC2015-0536
DRWN: HRUIZ01 2014/09/23
CHKD: HKNEELAN 2014/09/22
APPR: JFMURPHY 2015/04/27

QUALITY SYMBOLS
=0
=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±.005
2 PLACES	±.13	±.010
1 PLACE	±.25	±.020

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
INCH/MM

DRAWN BY DATE
HRUIZ01 2014/09/23

CHECKED BY DATE
HKNEELAN 2014/09/22

APPROVED BY DATE
JFMURPHY 2015/04/27

MATERIAL NO.
SEE TABLE

SIZE
A

SCALE
NTS

DESIGN UNITS
INCH

THIRD ANGLE
PROJECTION

TITLE
STRAIN RELIEF
LIQUID TIGHT CONDUIT
STRAIGHT-FEMALE

MOLEX INCORPORATED

DOCUMENT NO.
SD-130096-103

SHEET NO.
1 OF 1

6

5

4

3

2

1