



P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-15-018270	08DEC2015	DW	CW
	B1	ECR-18-004560	27MAR2018	CH	CW
	C	ECR-21-111798	29SEP2021	WQR	CW
	D	ECR-25-237961	13JUN2025	ABS	RB

- NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 500V
RATED CURRENT: 16A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
OPERATION TEMPERATURE: $-40\sim+125^{\circ}C$
WIRE RANGE: $0.14\sim4.0\text{ mm}^2$ (26~12 AWG)
CONTACT TYPE: CRIMP CONTACT
 2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20300X20XX000)


- 注释:
1. 技术参数:
绝缘材料: PC
额定电压: 500V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 6KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
工作温度: $-40\sim+125^{\circ}C$
接线范围: $0.14\sim4.0\text{ mm}^2$ (26~12 AWG)
接线类型: 冷压接
 2. 端子需要单独订购.
(订货号参考图面: T20300X20XX000)

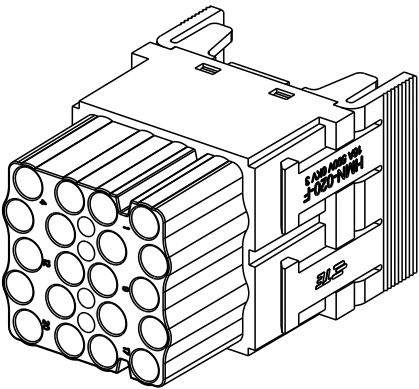

TYPE-1: T2111202201-000
类型-1: T2111202201-000


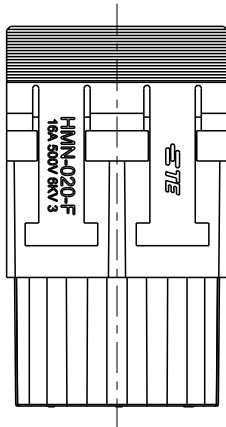


LASER PRINT MARKING, ARIAL FONT,
HEIGHT 2mm, LOCATION PER ACTUAL POSITION
激光打标, ARIAL 字体, 字高2mm, 位置按实际情况调整.





TYPE-2: T2111202201-A00,
THIS TYPE IS SAME AS TYPE-1,
ONLY ADD LASER PRINT MARKING "A"
类型-2: T2111202201-A00
此类型同类型-1, 只是增加了激光打标"A".


LASER PRINT MARKING, ARIAL FONT,
HEIGHT 2mm, LOCATION PER ACTUAL POSITION
激光打标, ARIAL 字体, 字高2mm, 位置按实际情况调整.

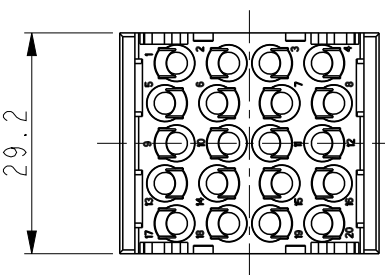

TYPE-3: T2111202201-B00,
THIS TYPE IS SAME AS TYPE-1,
ONLY ADD LASER PRINT MARKING "B"
类型-3: T2111202201-B00
此类型同类型-1, 只是增加了激光打标"B".

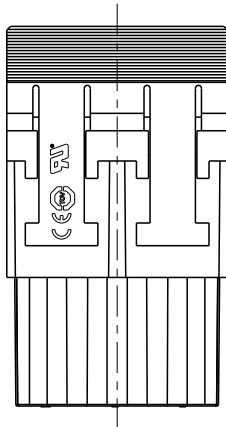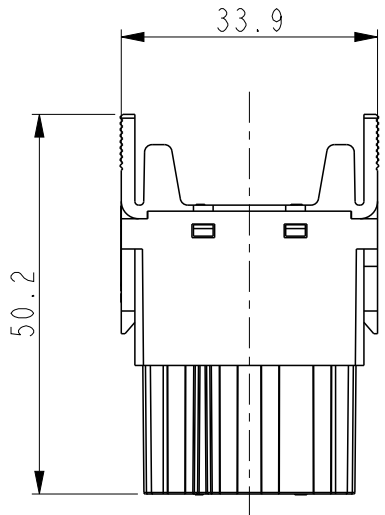

T2111202201-B00	HMN-020-F	HMN-020 FEMALE MODULE INSERT, MARK B HMN-020 模块母插, 打B标识	TYPE-3 类型-3
T2111202201-A00	HMN-020-F	HMN-020 FEMALE MODULE INSERT, MARK A HMN-020 模块母插, 打A标识	TYPE-2 类型-2
T2111202201-000	HMN-020-F	HMN-020 FEMALE MODULE INSERT HMN-020 模块母插	TYPE-1 类型-1
PART NUMBER 料号	PART DESCRIPTION 描述		TYPE 类型

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID.WANG 25MAR2015	 TE Connectivity		
		CHK CHRIS.WANG 25MAR2015			
DIMENSIONS: mm		APVD XIANG_XU 25MAR2015	NAME HMN-020-F		
		PRODUCT SPEC 108-137063	SIZE A3		
		APPLICATION SPEC 114-137063			
MATERIAL -		WEIGHT -	CAGE CODE 00779		DRAWING NO T2111202201000
		CUSTOMER DRAWING		SCALE 1:1	SHEET 1 OF 1
				RESTRICTED TO -	REV D