



P	LTR	DESCRIPTION	DATE	DWN	APVD
B1		ECR-15-016224	05NOV2015	DW	CW
B2		ECR-16-017507	13DEC2016	QY	CW
C		ECR-20-016101	09JUN2021	BS	CW
D		ECR-25-246907	18JUN2025	ABS	RB

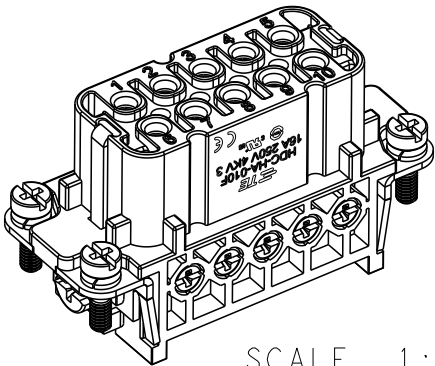



SCALE 1:1

TYPE-1, T2010102201-000, TE LOGO
类型-1, T2010102201-000, TE LOGO

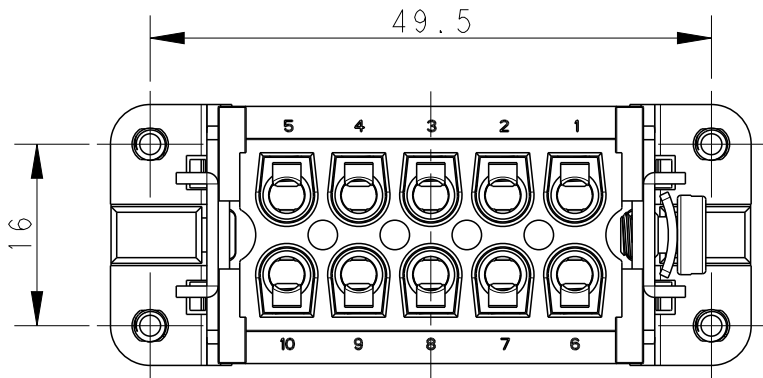


10X M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5Nm
10X M3 螺丝, 推荐锁紧力矩0.5Nm

M4 SCREW RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4 螺丝, 推荐锁紧力矩1.2Nm

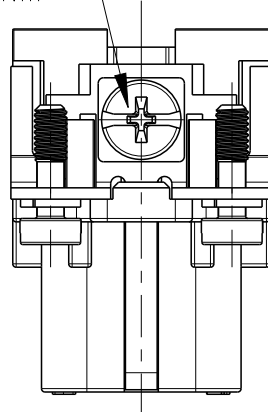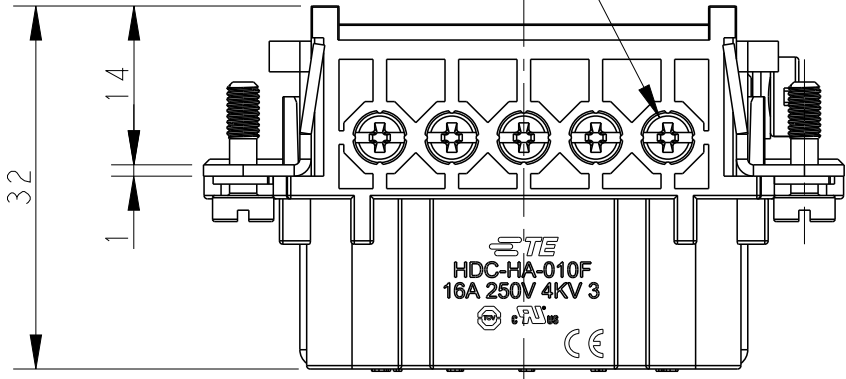


NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250 V
RATED CURRENT: 16 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 4 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.5-2.5 mm² (20-14 AWG)
CONTACT FINISH: SILVER PLATED
CONTACT TYPE: SCREW CONTACT

注释:
1. 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 4 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500 次
接线范围: 0.5-2.5 mm² (20-14 AWG)
端子表面处理: 镀银
接线类型: 螺丝连接

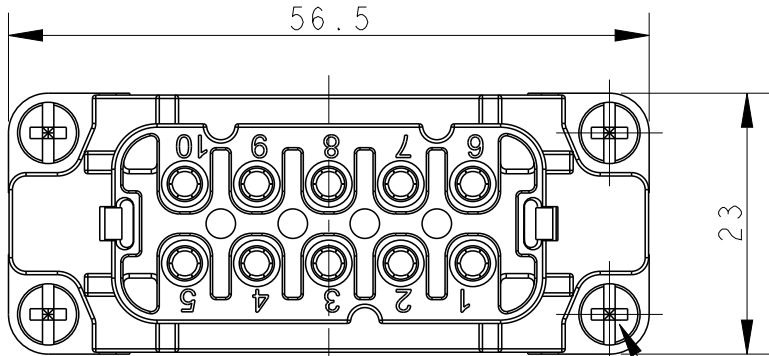

4X M3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5Nm
4X M3螺丝, 推荐锁紧力矩0.5Nm

PANEL CUT FOR INSERTS FOR USING
WITHOUT HOODS/ HOUSINGS
不用防护外壳时芯件的安装开孔图

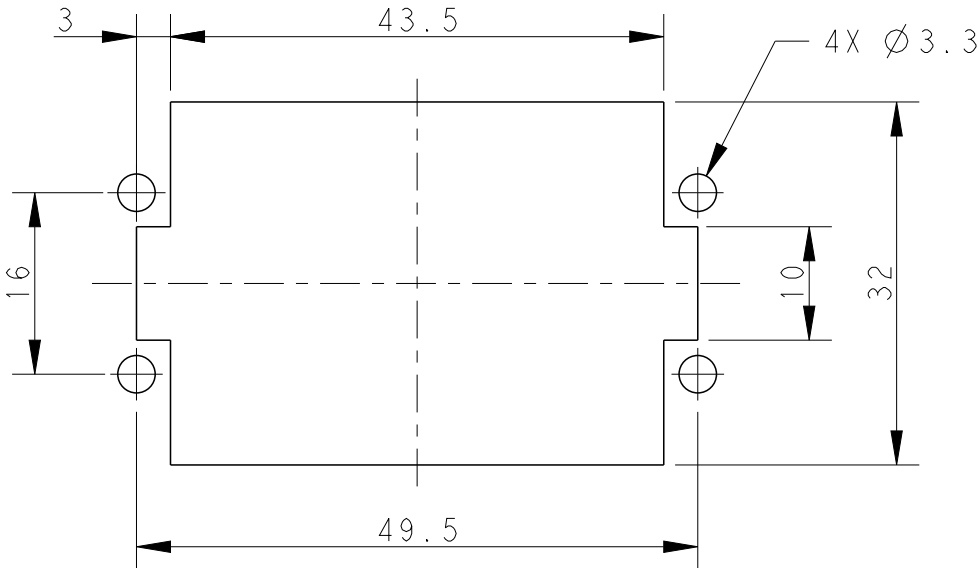





THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID WANG 18DEC2014	 TE Connectivity		
		CHK CHRIS WANG 18DEC2014			
		APVD XU XIANG 18DEC2014	NAME HA-010-F		
DIMENSIONS: mm		PRODUCT SPEC 108-137045	SIZE A3		
		APPLICATION SPEC 114-137045			
MATERIAL -		WEIGHT -	CAGE CODE -	DRAWING NO C-T2010102201000	RESTRICTED TO -
		CUSTOMER DRAWING		SCALE 3:2	SHEET 1 OF 2
				REV D	

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

NOTE :
SEE SHEET 1

注释 :
见页 1

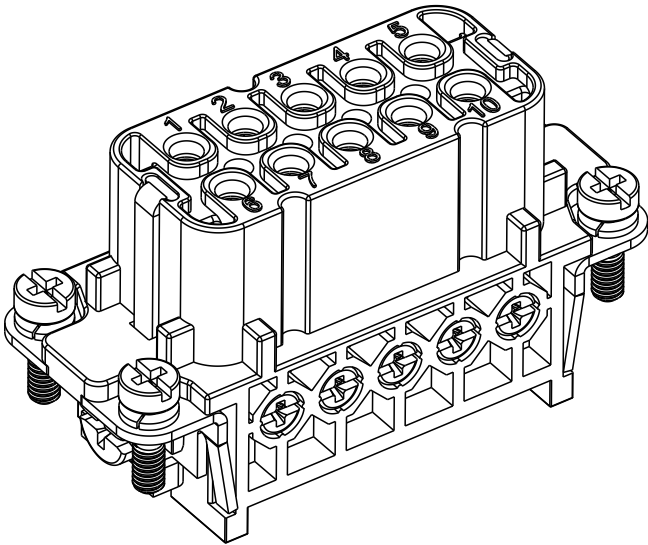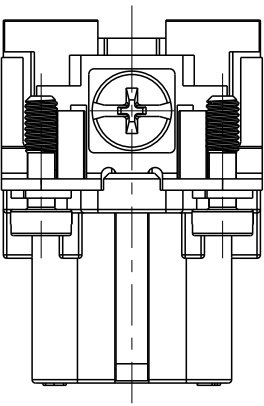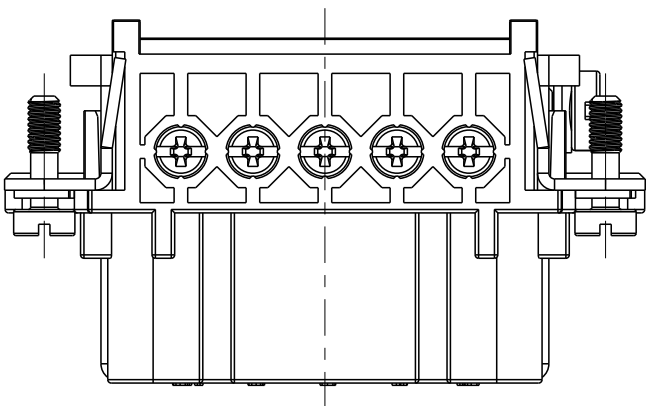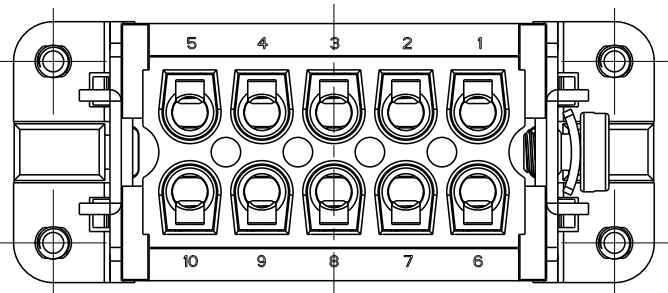

TYPE-2, T2010102201-001, NO LOGO
类型-2, T2010102201-001, 无 LOGO

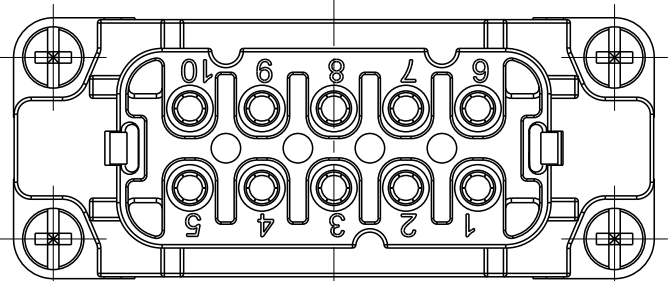

ALL DIMENSIONS ARE SAME AS TYPE 1,
EXCEPT THOSE DEFINED IN THIS TYPE.
除了在本类型中定义的尺寸外, 其它尺寸同类型 1

T2010102201-001	HA-010-F	HA-010 FEMALE INSERT, NO LOGO HA-010母插, 无LOGO	TYPE-2 类 型-2
T2010102201-000	HA-010-F	HA-010 FEMALE INSERT HA-010母插	TYPE-1 类 型-1
PART NUMBER 料 号	PART DESCRIPTION 描 述		TYPE 类 型

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID WANG 18DEC2014	 TE Connectivity				
		CHK CHRIS WANG 18DEC2014					
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-	APVD XU XIANG 18DEC2014	NAME HA-010-F				
		PRODUCT SPEC 108-137045					
MATERIAL - -		APPLICATION SPEC 114-137045	SIZE A3	CAGE CODE -	DRAWING NO C-T2010102201000	RESTRICTED TO -	
		FINISH - -					WEIGHT -
		CUSTOMER DRAWING					SCALE 3:2