
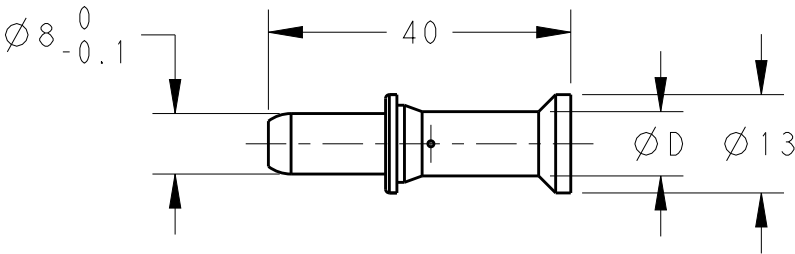






REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	25JUN2015	DW	CW

NOTES:
1. TECHNICAL CHARACTERISTICS:
CONTACT MATERIAL: BRASS
SURFACE PLATING:
SILVER PLATING: $\geq 2\mu\text{m}$
CONTACT RESISTANCE: $\leq 0.5\text{m}\Omega$
WIRE RANGE: SEE TABLE
OPERATION TEMPERATURE: $-40\sim+125^{\circ}\text{C}$



注释:
1. 技术参数:
公针材料: 黄铜
表面电镀:
镀银: $\geq 2\mu\text{m}$
接触电阻: $\leq 0.5\text{m}\Omega$
接线范围: 见表格
工作温度: $-40\sim+125^{\circ}\text{C}$



1) $\varnothing d=4.3, 5.5, 7.0$

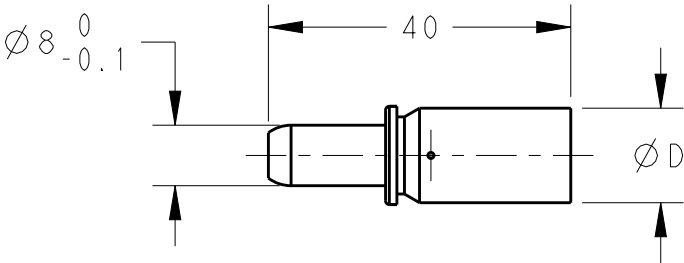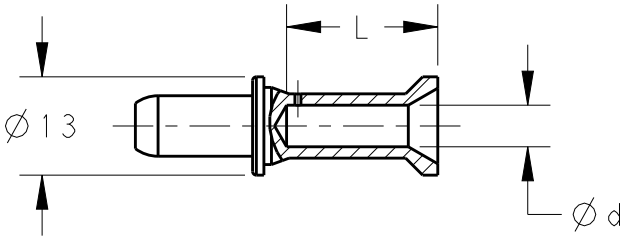

2) $\varnothing d=8.2$

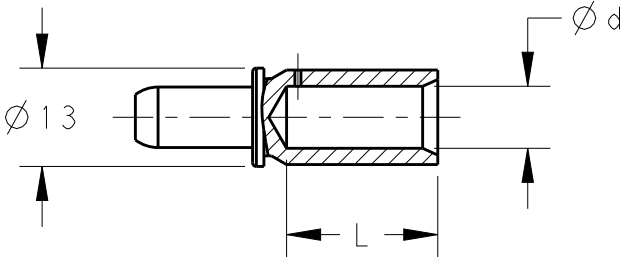

	PART NUMBER	$\varnothing d$	$\varnothing D$	WIRE GAUGE	STRIPPING LENGTH L (mm)
	SILVER PLATING			MM ²	
PIN CONTACT	T2050001010-000	4.3	5.6	10	20
	T2050001016-000	5.5	8.5	16	
	T2050001025-000	7.0	10.0	25	
	T2050001035-000	8.2	12.5	35	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 25JUN2015 David Wang	TE Connectivity		
		CHK 25JUN2015 Chris Wang			
		APVD 25JUN2015 Xiang Xu	NAME CNM PIN CONTACT		
		PRODUCT SPEC 108-137058			
		APPLICATION SPEC 114-137058			
		WEIGHT -			
		Customer Drawing	SCALE 1:1	SHEET 1 OF 1	REV A
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH -	SIZE A3		
			CAGE CODE 00779		
			DRAWING NO T20500010XX000		
			RESTRICTED TO -		