

Issue Date: 11/25/2014

Page: 1 of 1


File: PSS-03702XXX

ALL	600A Deadbreak Copper Contact	03702XXX
-----	-------------------------------	----------



The **03702XXX** copper crimp barrel connector is designed to be used with Elastimold 15/25/35kV Class 600A deadbreak elbow and splice products. Connectors may be used with plated copper conductors only. Can be used for 900A Applications but all components must be in Copper (Cable, connector and bushing, etc.)

Ordering Instructions:

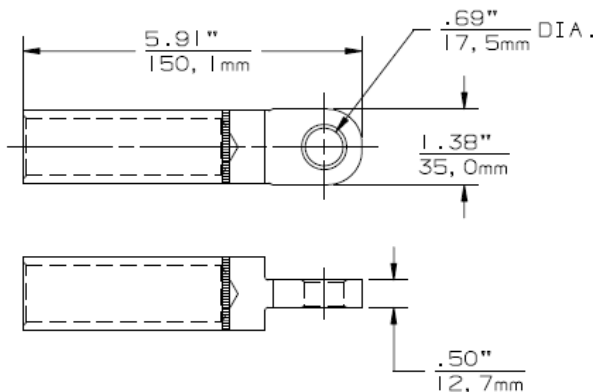

Each kit contains the following:

- | | | |
|---|-------------|----------|
| 1 | Connector | 03702XXX |
| 1 | Crimp Chart | CC-0046 |

X Code	AWG or kcmil		mm2	Connector Only
	Strand./ Compr.	Solid/ Compact	Compact	Copper
210	-	2	-	03702210
220	2	1	35	03702220
230	1	1/0	50	03702230
240	1/0	2/0		03702240
250	2/0	3/0	70	03702250
260	3/0	4/0	95	03702260
270	4/0	250	125	03702270
280	250	300	-	03702280
290	300	350	150	03702290
300	350	400	185	03702300
310	400	450	240	03702310
320	450	500/550	-	03702320
330	500	600	250/300	03702330
340	550	650	-	03702340
350	600	700	400	03702350
360	650	750/800	-	03702360
380	700/750	900	-	03702380
390	800	-	500	03702390
400	900	1000	-	03702410
410	1000	-	-	03702410
420	-	1250	-	03702420
440	1250	-	-	03702440