



Cable Glands Accessories

KADL Cable Entry System



KADL Cable Entry System | Modular Design | IP65 Rating



KADL Cable Entry						
Part Number	# of Entries		Dimension (mm)			
	Small Cable O.D. (3.0 - 16.0 mm)	Large Cable O.D. (15.0 - 32.5 mm)	L	L1	H	H1
KADL-1K-2G	1	2	153	63	32.3	8.9
KADL-5K	5	0	153	63	32.3	8.9
KADL-10K	10	0	153	85.5	32.3	8.9
KADL-2K-4G	2	4	153	108	32.3	8.9
KADL-6K-2G	6	2	153	108	32.3	8.9
KADL-15K	15	0	153	108	32.3	8.9
KADL-11K-2G	11	2	153	130.5	32.3	8.9
KADL-20K	20	0	153	130.5	32.3	8.9
KADL-3K-6G	3	6	153	153	32.3	8.9
KADL-7K-4G	7	4	153	153	32.3	8.9
KADL-16K-2G	16	2	153	153	32.3	8.9
KADL-25K	25	0	153	153	32.3	8.9
KADL Expansion Insert						
KADL-EXP	N/A	N/A	153	27	32.3	8.9

KADL-EXP is an expansion insert for adding 5 holes to an existing 5, 10, 15, or 20 hole frame.

Required hole size will change according to the number of expansion inserts used. Maximum frame size not to exceed 25 holes.

Grommets ordered separately (Page U-36).

Application

Insertion and sealing of pre-assembled cables with connectors into housings

Benefits

- Modular design and high packaging density
- Grommet clamping range to 2 mm
- Strain relief for cables
- Easy retrofits and adjustments


Mounting

Mounting in wall thicknesses from 1.5 to 2.0 mm

KADL can be attached with screws for wall thicknesses greater than 2.0 mm

Specifications:

Flange: Polyamide PA6 V-0
Sealing: TPE
Temperature: -30°C to +100°C (-22°F to +212°F)

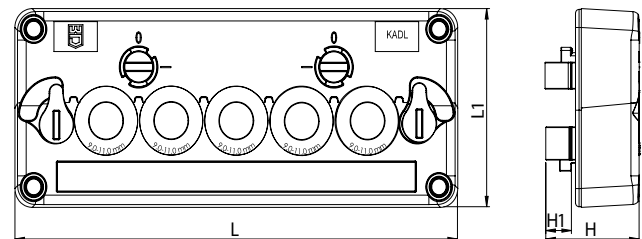

KADL Cable Entry System

Expansion Insert